




AS-6M PERC

MONOCRYSTALLINE MODULE

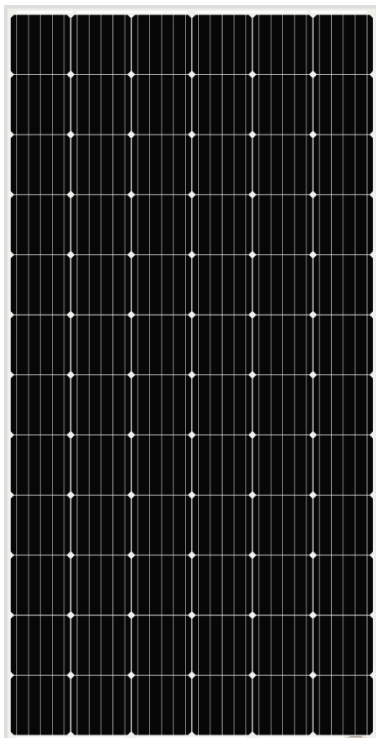

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- ☑ High module conversion efficiency up to 19.33% by using Passivated Emmitter Rear Contact (PERC) technology.
- ☑ Low degradation and excellent performance under high temperature and low light conditions.
- ☑ Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- ☑ High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- ☑ Potential induced degradation (PID) resistance.
- ☑ Positive power tolerance of 0 ~ +3 %.


CERTIFICATIONS

- ☑ IEC61215, IEC61730, IEC62716, IEC61701, CE, CQC, CGC, ETL(USA), JET(Japan), J-PEC(Japan), Kemco(South Korea), KS(South Korea), MCS(UK), CEC(Australia), FSEC(FL-USA), CSI Eligible(CA-USA), Israel Electric(Israel), InMetro(Brazil), TSE(Turkey)
- ☑ ISO9001:2008: Quality management system
- ☑ ISO14001:2004: Environmental management system
- ☑ OHSAS18001:2007: Occupational health and safety management system

SPECIAL WARRANTY

- ☑ 12 years limited product warranty.
- ☑ Limited linear power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.

Passionately
committed to
delivering innovative
energy solution

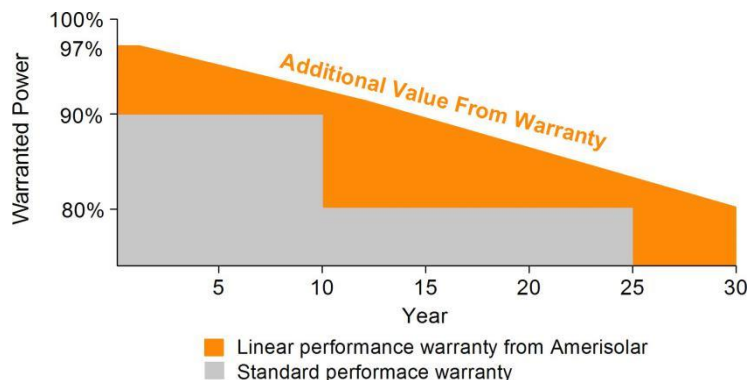

ELECTRICAL CHARACTERISTICS AT STC

Nominal Power (P_{max})	340W	345W	350W	355W	360W	365W	370W	375W
Open Circuit Voltage (V_{oc})	46.8V	47.0V	47.2V	47.4V	47.6V	47.8V	48.0V	48.2V
Short Circuit Current (I_{sc})	9.42A	9.50A	9.57A	9.64A	9.71A	9.78A	9.85A	9.92A
Voltage at Nominal Power (V_{mp})	38.2V	38.4V	38.6V	38.8V	39.0V	39.2V	39.4V	39.6V
Current at Nominal Power (I_{mp})	8.91A	8.99A	9.07A	9.15A	9.24A	9.32A	9.40A	9.47A
Module Efficiency (%)	17.52	17.78	18.04	18.30	18.55	18.81	19.07	19.33
Operating Temperature	-40°C to +85°C							
Maximum System Voltage	1000V DC							
Fire Resistance Rating	Type 1(in accordance with UL1703)/Class C(IEC61730)							
Maximum Series Fuse Rating	15A							

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5

ELECTRICAL CHARACTERISTICS AT NOCT

Nominal Power (P_{max})	253W	257W	261W	264W	268W	272W	276W	279W
Open Circuit Voltage (V_{oc})	43.3V	43.5V	43.7V	43.9V	44.1V	44.3V	44.5V	44.7V
Short Circuit Current (I_{sc})	7.63A	7.70A	7.75A	7.81A	7.87A	7.92A	7.98A	8.04A
Voltage at Nominal Power (V_{mp})	35.1V	35.3V	35.5V	35.7V	35.9V	36.1V	36.3V	36.5V
Current at Nominal Power (I_{mp})	7.21A	7.29A	7.36A	7.40A	7.47A	7.54A	7.61A	7.65A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline PERC 156.75x156.75mm (6x6inches)
Number of cells	72 (6x12)
Module dimensions	1956x992x40mm (77.01x39.06x1.57inches)
Weight	22.5kg (49.6lbs)
Front cover	3.2mm (0.13inches) tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction box	IP67, 3 diodes
Cable	4mm ² (0.006inches ²), 1000mm (39.37inches)
Connector	MC4 or MC4 compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P_{max}	-0.39%/°C
Temperature Coefficients of V_{oc}	-0.29%/°C
Temperature Coefficients of I_{sc}	0.052%/°C


PACKAGING

Standard packaging	26pcs/pallet
Module quantity per 20' container	260pcs
Module quantity per 40' container	572pcs(GP)/616pcs(HQ)


ENGINEERING DRAWINGS

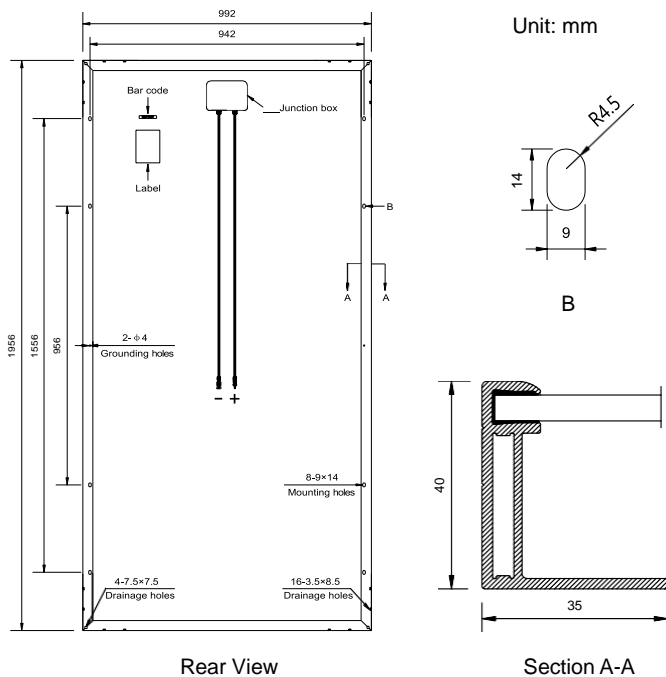

IV CURVES

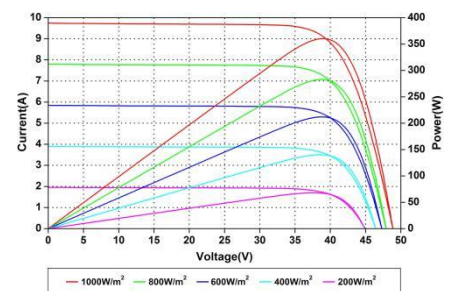

Current-Voltage and Power-Voltage Curves at Different Irradiances

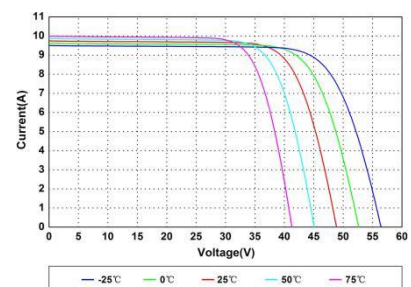

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.