

# Standard Series TSP-60H

Trunsun High Efficiency Polycrystalline Solar Module (1500V)  
270-285W



### Approved Technology

Approved practice for different operating conditions



### Positive Tolerance

Positive tolerance brings more power for free



### Mechanical Load Endurance

Excellent mechanical load resistance: wind loads (2400Pa) & snow loads (5400Pa)




### Guaranteed Reliability Against Harsh Environment

Due to Complicated Quality control system, offer survival solar module in harsh environment




### 1500V System Voltage

Approved IEC1500Vdc system voltage, saving on BoS cost

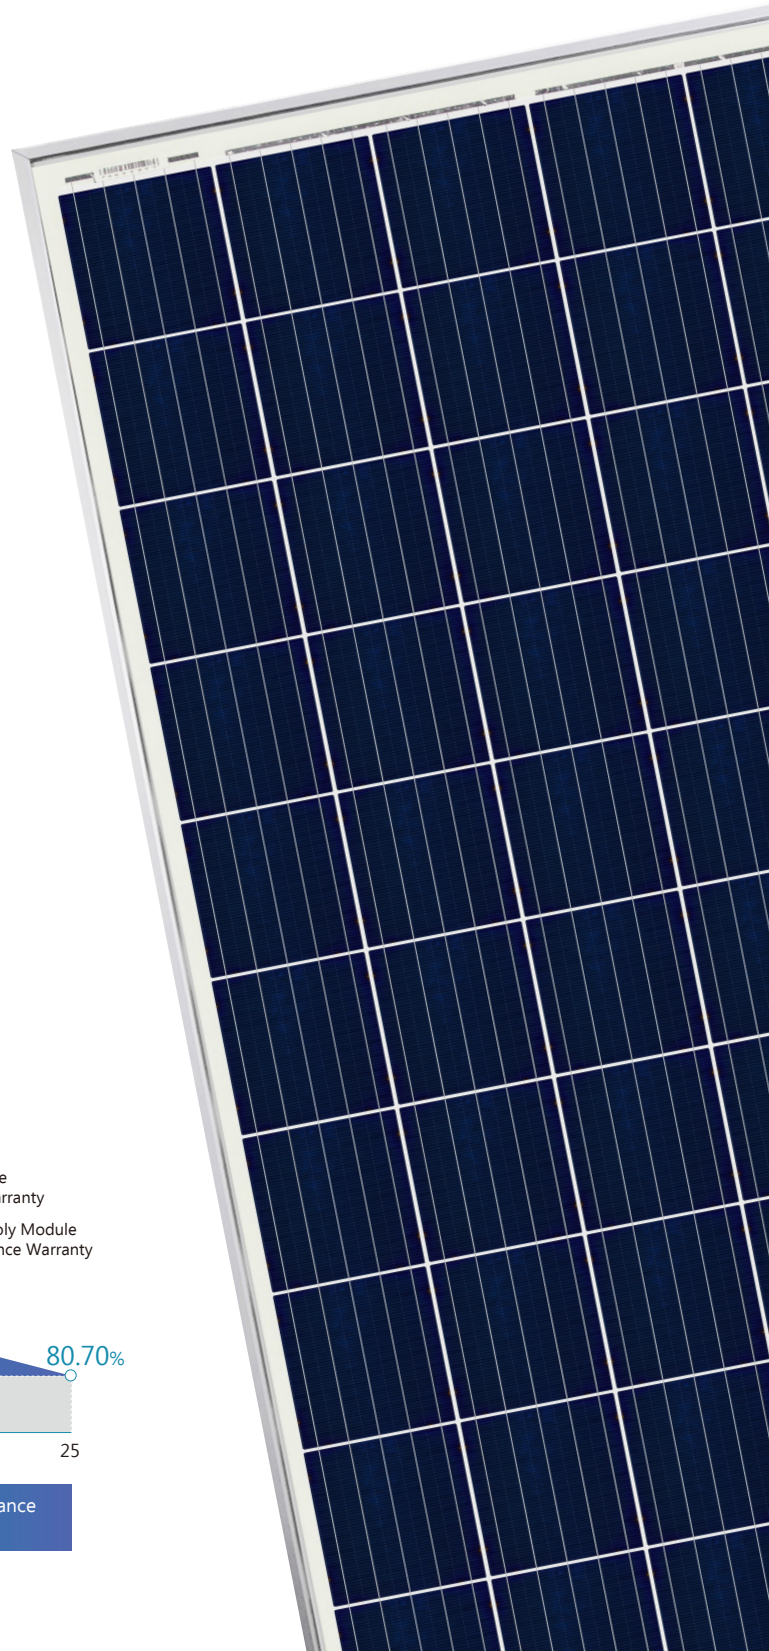

## LINEAR PERFORMANCE WARRANTY

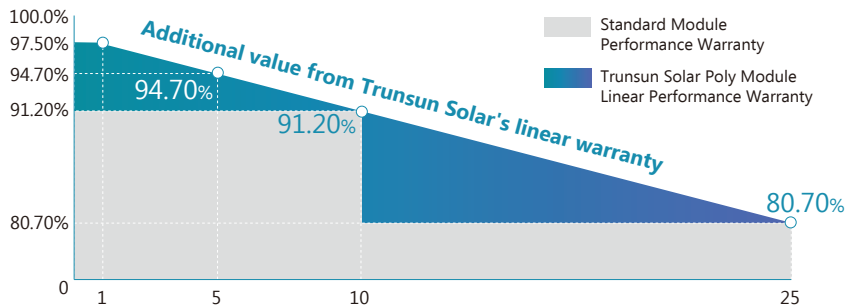

**12years** Product Material & Workmanship

**25years** Linear Performance Warranty



**TRUNSUN SOLAR**

Never stop exceeding

### About Trunsun Solar

Trunsun Solar, established in 2008, is dedicated to providing solar products with high quality, excellent performance and strong after-sales support. The company not only has strong financial support but also never stops innovating. Trunsun Solar will keep delivering the diversified solar products for all kinds of renewable energy generation systems around the world.

[www.trunsunsolar.com](http://www.trunsunsolar.com)

# Standard Series TSP-60H Trunsun High Efficiency Polycrystalline Solar Module (1500V)

## ELECTRICAL DATA @ STC

		TSP270-60H	TSP275-60H	TSP280-60H	TSP285-60H
Peak Power (Pmax)	(W)	270	275	280	285
Maximum Power Voltage (Vmp)	(V)	31.58	31.87	32.15	32.43
Maximum Power Current (Imp)	(A)	8.55	8.63	8.71	8.79
Open-circuit Voltage (Voc)	(V)	37.87	38.14	38.42	38.69
Short-circuit Current (Isc)	(A)	9.13	9.2	9.27	9.35
Module Efficiency	(%)	16.6	16.9	17.2	17.5
Operating Temperature		-40°C~+85°C			
Maximum System Voltage		1500V			
Maximum Series Fuse Rating		15A			
Application Class		Class A			
Power Tolerance		0~+3%			

\*STC (Standard Test Condition): Irradiance 1000W/ m<sup>2</sup>, Module Temperature 25°C, AM 1.5

## ELECTRICAL DATA @ NMOT

		TSP270-60H	TSP275-60H	TSP280-60H	TSP285-60H
Peak Power (Pmax)	(W)	200	204	207	211
MPP Voltage (Vmp)	(V)	29.15	29.42	29.68	29.93
MPP Current (Imp)	(A)	6.86	6.93	6.99	7.05
Open Circuit Voltage (Voc)	(V)	35.58	35.83	36.09	36.35
Short Circuit Current (Isc)	(A)	7.40	7.45	7.51	7.57

\*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m<sup>2</sup>, Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

## TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax		-0.41%
Temperature coefficient of Voc		-0.33%
Temperature coefficient of Isc		0.05%
NMOT		43±3°C

## MECHANICAL DATA


Cell Type		Poly-Crystalline, 6' inch
Cell Arrangement		60pcs (6×10)
Dimension (L×W×H)		1640×991×35mm
Weight		18.2kg
Front Cover		3.2mm Tempered Glass
Frame		Anodized Aluminium Alloy
Junction Box		IP67, 3 Bypass Diodes
Cable Type		4mm <sup>2</sup>
Length of Cable		1000mm
Connector		PV Connector

## PACKING MANNER



Packing Type		40HQ
Piece/Pallet		30
Pallet/Container		28
Piece/Container		840

\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Zhejiang Trunsun Solar Co., Ltd. Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

## Current-Voltage Curve under different irradiance

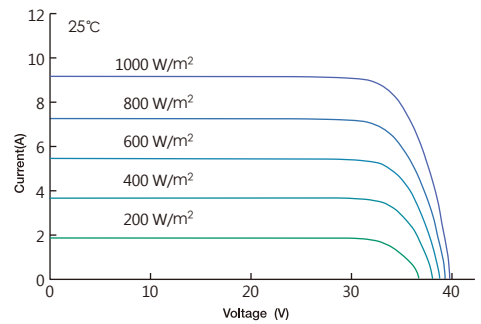

## Current-Voltage Curve under different working temperatures

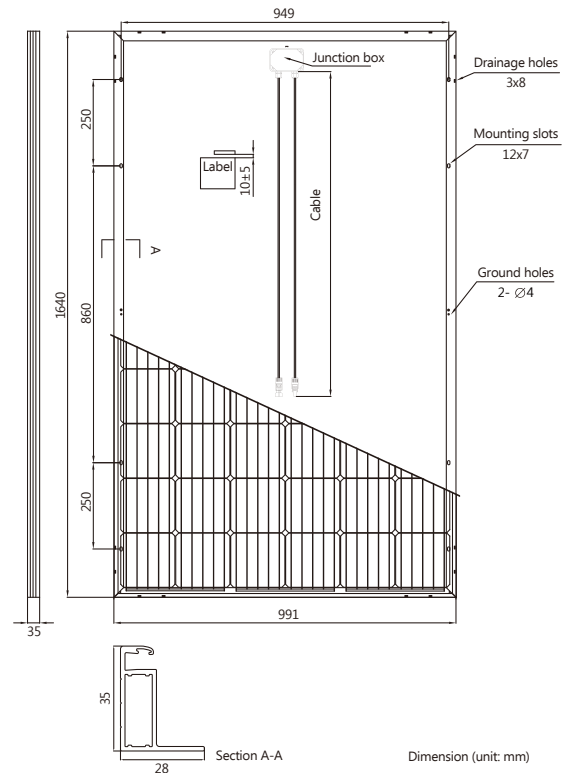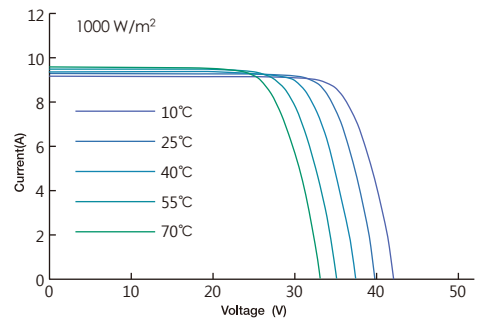

Version 2018.12 © Zhejiang Trunsun Solar Co., Ltd All Rights Reserved.