



**390 - 410 Wp**

**AXITEC**  
high quality german solar brand

## AXIworldpremium XXL HC

High performance solar module  
108 halfcell, monocrystalline

The advantages:


- 15** Years 15 years Manufacturer's warranty
- HC** High module performance through Half-Cut-technology and selected materials
- Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 100%** 100% visual electroluminescence inspection in production
- IP 68** High quality junction box and connector systems



Fig. similar 108MHEN210325A-56/1

**Exclusive linear AXITEC high performance guarantee!**

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

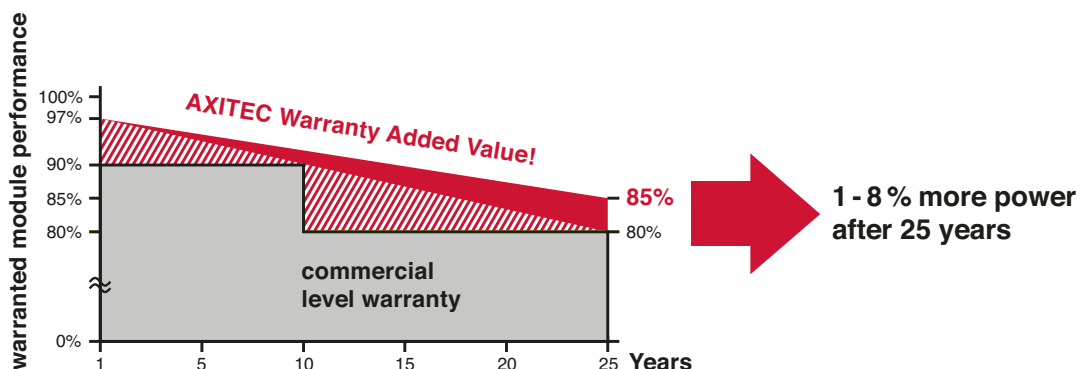

## AXIworldpremium XXL HC 390 - 410 Wp

**Electrical data** (at standard conditions (STC) irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P <sub>mpp</sub>	Nominal voltage U <sub>mpp</sub>	Nominal current I <sub>mpp</sub>	Short circuit current I <sub>sc</sub>	Open circuit voltage U <sub>oc</sub>	Module conversion efficiency
AC-390MH/108V	390 Wp	30.80 V	12.67 A	13.56 A	36.70 V	19.95 %
AC-395MH/108V	395 Wp	31.00 V	12.75 A	13.65 A	36.90 V	20.20 %
AC-400MH/108V	400 Wp	31.20 V	12.83 A	13.73 A	37.10 V	20.46 %
AC-405MH/108V	405 Wp	31.40 V	12.90 A	13.81 A	37.30 V	20.72 %
AC-410MH/108V	410 Wp	31.60 V	12.98 A	13.88 A	37.50 V	20.97 %

### Design

Frontside	3.2 mm hardened, low-reflection white glass
Cells	108 monocrystalline high efficiency cells
Backside	Composite film
Frame	35 mm silver aluminium frame

### Mechanical data

L x W x H	1724 x 1134 x 35 mm
Weight	22.1 kg with frame

### Mechanical load

Design load (pressure/suction)	3600 Pa / 1600 Pa
Test load (pressure/suction)	5400 Pa / 2400 Pa

### Power connection

Socket	Protection Class IP68
Wire	approx. 1.4 m, 4 mm <sup>2</sup>
Plug-in system	Plug/socket IP68, Tongling

### Limit values

System voltage	1500 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	25.0 A

Permissible operating temperature -40°C to 85°C / -40F to 185F

(No external voltages greater than U<sub>oc</sub> may be applied to the module)


\* NOCT, irradiance 800 W/m<sup>2</sup>; AM 1,5; wind speed 1 m/s; Temperature 20°C

### Temperature coefficients

Voltage U <sub>oc</sub>	-0.28 %/K
Current I <sub>sc</sub>	0.045 %/K
Output P <sub>mpp</sub>	-0.35 %/K

### Low-light performance (Example for AC-410MH/108V)

I-U characteristic curve	Current I <sub>pp</sub>	Voltage U <sub>pp</sub>
200 W/m <sup>2</sup>	2.65 A	30.41 V
400 W/m <sup>2</sup>	5.35 A	30.76 V
600 W/m <sup>2</sup>	8.00 A	31.00 V
800 W/m <sup>2</sup>	10.57 A	31.27 V
1000 W/m <sup>2</sup>	12.98 A	31.60 V

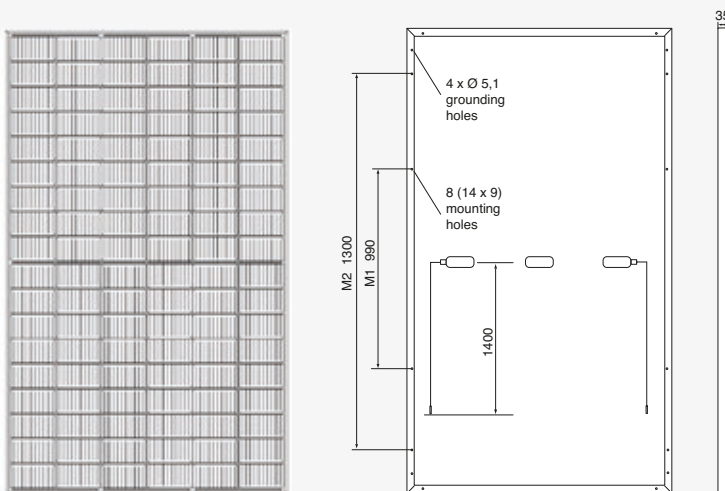

All dimensions in mm