



The better 1phase PowerUNO

The better flexibility

Battery ready inverter, DC or AC coupled
Backup power up to 5 kW

The better security

Patented AFCI
PLC Rapid Shutdown compatibility


The better installability

Plug & play connections
Integrated spirit level

The better connectivity

Embedded Wi-Fi, ethernet and USB
Blockchain ready

Go for the better

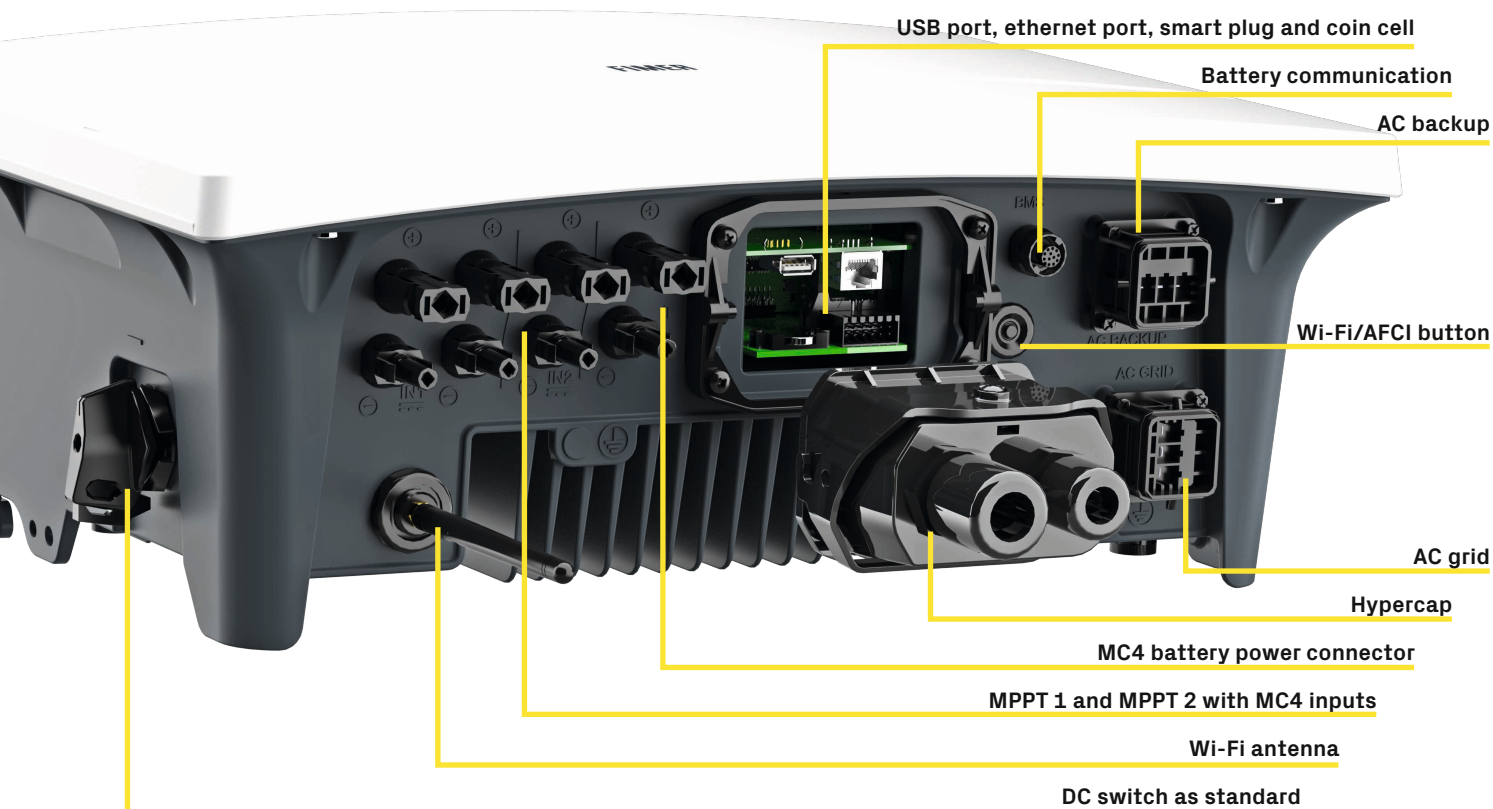

One size for all

from 2 kW to 6 kW

x2 faster

switching frequency

-20 dB (A)

noise reduction

+40%

time saving
for commissioning



24 / 7

real time monitoring

Battery

ready

100%



No tools

for commissioning

<2 s

backup transition

Patented

ARC fault detection

Blockchain

ready

+55%

CPU performance

Connected

SG ready & EV charger

Built-in

ethernet and Wi-Fi

Setup

anytime

Technical data and types

Inverter	FIM-HY-2.0-SE-A-1PH	FIM-HY-3.3-SE-A-1PH	FIM-HY-4.0-SE-A-1PH	FIM-HY-4.6-SE-A-1PH	FIM-HY-5.0-SE-A-1PH	FIM-HY-6.0-SE-A-1PH
Input side						
Absolute maximum DC input voltage (V _{max,abs})	600 V					
Start-up DC input voltage (V _{start})	150 V adj. 120...350 V	150 V adj. 120...350 V	200 V adj. 150...350 V	200 V adj. 180...350 V	200 V adj. 180...350 V	200 V adj. 200...350 V
Operating DC input voltage range (V _{dcmín...V_{dcmáx}})	0.7 x V _{start} ...580 V (min 90 V)					
Rated DC input voltage (V _{dcr})	390 V					
Rated DC input power (P _{dcr})	2055 W	3074 W	4082 W	4693 W	5102 W	6122 W
DC/AC ratio	Up to 200%, according to location					
Number of independent MPPT	1	2	2	2	2	2
Maximum DC input power for each MPPT (P _{MPPT max})	3000 W Linear derating [500 ≤ V _{MPPT} ≤ 570 V]	2305 W Linear derating [500 ≤ V _{MPPT} ≤ 570 V]	3061 W Linear derating [500 ≤ V _{MPPT} ≤ 570 V]	3827 W Linear derating [500 ≤ V _{MPPT} ≤ 570 V]	3827 W Linear derating [500 ≤ V _{MPPT} ≤ 570 V]	4592 W Linear derating [500 ≤ V _{MPPT} ≤ 570 V]
DC input voltage range with parallel configuration of MPPT at P _{acr} , not operative battery	180 ...500 V	135...500 V	165...500 V	180...500 V	180...500 V	200...500 V
Maximum DC input current (I _{dcr max}) / for each MPPT (I _{MPPT max})	26 A / 13 A	26 A / 13 A	26 A / 13 A	32.5 A / 19.5 A-13 A (MPPT1 - MPPT2)	32.5 A / 19.5 A-13 A (MPPT1 - MPPT2)	32.5 A / 19.5 A-13 A (MPPT1 - MPPT2)
Maximum input short circuit current for each MPPT	20 A	20 A	20 A	24 A	24 A	24 A
Number of DC inputs pairs for each MPPT	1	1	1	2 - 1 (MPPT 1 - MPPT 2)	2 - 1 (MPPT 1 - MPPT 2)	2 - 1 (MPPT 1 - MPPT 2)
DC connection type ¹⁾	PV quick fit connector					
Input protection						
Reverse polarity protection	Yes, from limited current source					
Input over voltage protection for each MPPT - varistor	Yes, TYPE II protection class ²⁾					
Photovoltaic array isolation control	According to local standard					
DC switch rating for each MPPT	25A / 600 V					
Battery port						
Operating DC voltage range	350...500 V					
PowerX Max. units	3					
Max. charge power	2000 W	3300 W	4000 W	4600 W	5000 W	6000 W
Max. discharge power	2000 W	3300 W	4000 W	4600 W	5000 W	6000 W
Grid connected output side						
AC Grid connection type	Single-phase					
Rated AC power (P _{acr @cosφ=1})	2000 W	3300 W	4000 W	4600 W	5000 W	6000 W
Maximum AC output power (P _{acmax @cosφ=1})	2000 W	3300 W	4000 W	4600 W	5000 W	6000 W
Maximum apparent power (S _{max})	2000 VA	3300 VA	4000 VA	4600 VA	5000 VA	6000 VA
Rated AC grid voltage (V _{acr})	220 / 230 / 240 V					
AC voltage range ³⁾	180...264 V					
Maximum AC output current (I _{acr max})	9.6 A	15.8 A	19.2 A	22.8 A	22.8 A	27.2 A
Contributory fault current	9.6 A	15.8 A	19.2 A	22.8 A	22.8 A	27.2 A
Rated output frequency (f _r)	50 Hz / 60 Hz					
Output frequency range (f _{min...f_{max}}) ⁴⁾	45...55 Hz / 55...65 Hz					
Nominal power factor and adj. range	> 0.995, adj. ± 0.8 - 1 (over/under exited)					
Total current harmonic distortion	< 3 %					
AC connection type	Female panel connector					
Grid connected output protection						
Anti-islanding protection	According to local standard					
Maximum external AC overcurrent protection	16.0 A	20.0 A	25.0 A	25.0 A	25.0 A	32.0 A
Output overvoltage protection - varistor	2 (L - N / L - PE), TYPE II protection class ²⁾					
Efficiency						
Maximum efficiency	98.2 %					
MPPT efficiency	99.9 %					
Backup output side						
AC grid connection type	Single-phase					
Maximum apparent power (S _{max})	2000 VA	3300 VA	4000 VA	4600 VA	5000 VA	6000 VA
Rated AC grid Voltage (V _{acr})	220 / 230 / 240 V					
AC Voltage range ³⁾	180...264 V					
Maximum AC output current (I _{acr max})	9.6 A	14.4 A	19.2 A	22.7 A	22.7 A	27.2 A
Rated output frequency (f _r)	50 Hz / 60 Hz					
Output frequency range (f _{min...f_{max}}) ⁴⁾	45...55 Hz / 55...65 Hz					
AC connection type	Female panel connector					
Backup output protection						
Maximum external AC overcurrent protection	16.0 A	20.0 A	25.0 A	25.0 A	25.0 A	25.0 A
Output overvoltage protection - varistor	2 (L - N / L - PE), TYPE II protection class ²⁾					

Technical data and types

Inverter	FIM-HY-2.0-SE-A-1PH	FIM-HY-3.3-SE-A-1PH	FIM-HY-4.0-SE-A-1PH	FIM-HY-4.6-SE-A-1PH	FIM-HY-5.0-SE-A-1PH	FIM-HY-6.0-SE-A-1PH
Embedded communication						
Embedded physical interface	Wi-Fi [®] , ethernet, RS-485					
Embedded communication protocols	Modbus TCP (SunSpec), Modbus RTU (SunSpec)					
Datalogger data retention	30 days					
Remote monitoring	Energy Viewer (mobile APP), Energy viewer Web, Plant Portfolio Manager					
Local monitoring	Energy Viewer (mobile APP)					
Environmental						
Ambient temperature range	-25...+60°C with derating above 50°C	-25...+60°C with derating above 50°C	-25...+60°C with derating above 50°C	-25...+60°C with derating above 50°C	-25...+60°C with derating above 50°C	-25...+60°C with derating above 45°C
Relative humidity	4...100 % condensing					
Acoustic noise emission level	< 30 dB (A) @ 1 m					
Maximum operating altitude without derating	2000 m / 6560 ft					
Physical						
Environmental protection rating	IP65					
Cooling	Natural					
Dimension (H x W x D)	330 mm x 470 mm x 182 mm					
Weight	12 kg					
Mounting system	Wall bracket					
Safety						
Isolation level	Transformerless					
Marking	CE, RCM					
Safety and EMC standard	IEC/EN 62109-1, IEC/EN 62109-2, IEC 62477-1, EN 61000-6-2, EN 61000-6-3, EN 61000-3-2, EN 61000-3-3, EN 61000-3-11, EN 61000-3-12					
Grid standards (check your sales channel for availability) ⁶⁾	CEI 0-21, EN 50549-1, DIN V VDE V 0126-1-1, VDE-AR-N 4105, AS/NZS 4777.2, IEC 61727, IEC 62116					
Other features						
Load manager	Yes, with integrated relays					
AC backup output, off grid	Yes					
Battery charge from AC	Yes, using time of usage policy					
AC-coupled mode	Yes, settable during commissioning					

1) Refer to the document "String inverter – Product Manual appendix" available at www.fimer.com/solarinverters to know the brand and the model of the quick fit connector"

2) As per test defined in EN/IEC 61643-11

3) The AC voltage range may vary depending on specific country grid standard


4) The Frequency range may vary depending on specific country grid standard

5) As per IEEE 802.11 b/g/n standard

6) Further grid standard will be added, please refer to FIMER's Solar page for further details

Remark. Features not specifically listed in the present data sheet are not included in the product

PowerUNO: multi-inverter energy management

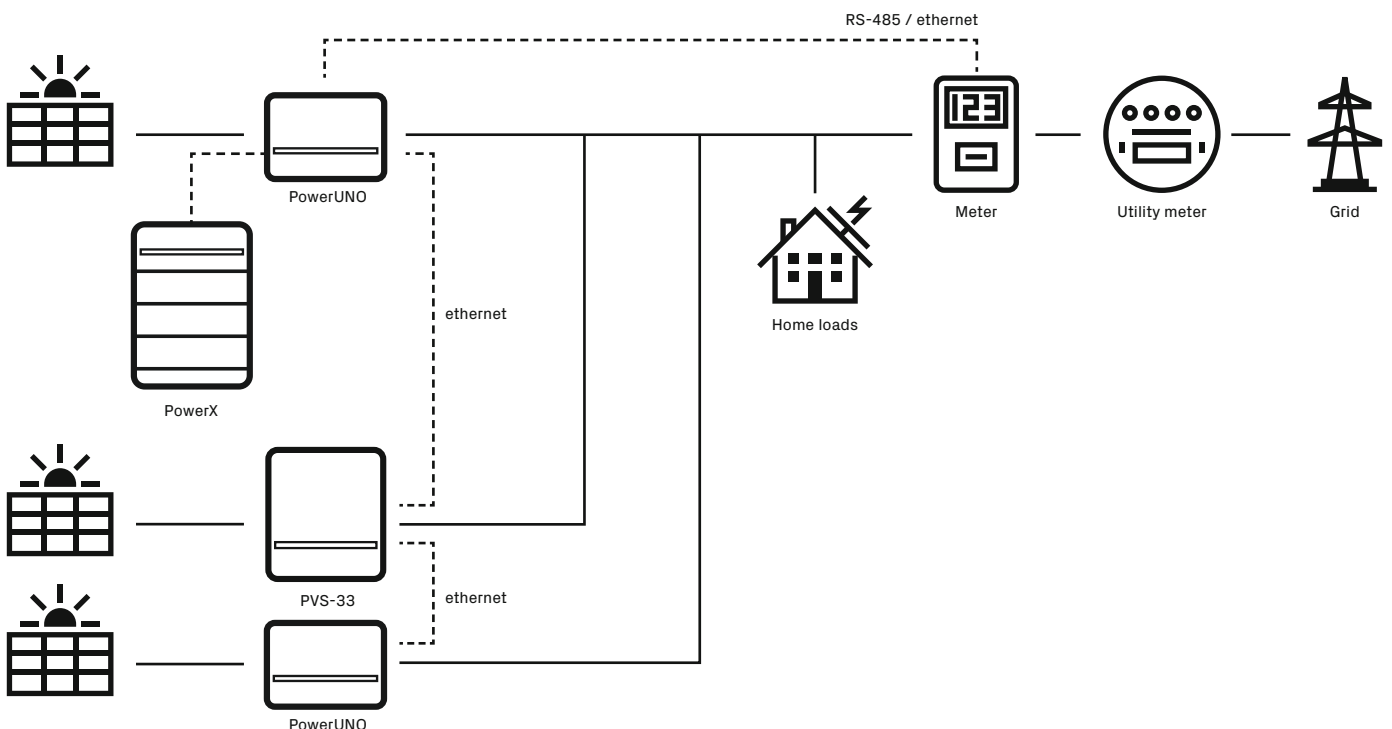

Preliminary datasheet

Subject to change without notice. Copyright© 2021 FIMER. All rights reserved.

