


SUPREME

BISOL Supreme™

Monocrystalline PV Module BDO 360 - 365 Wp

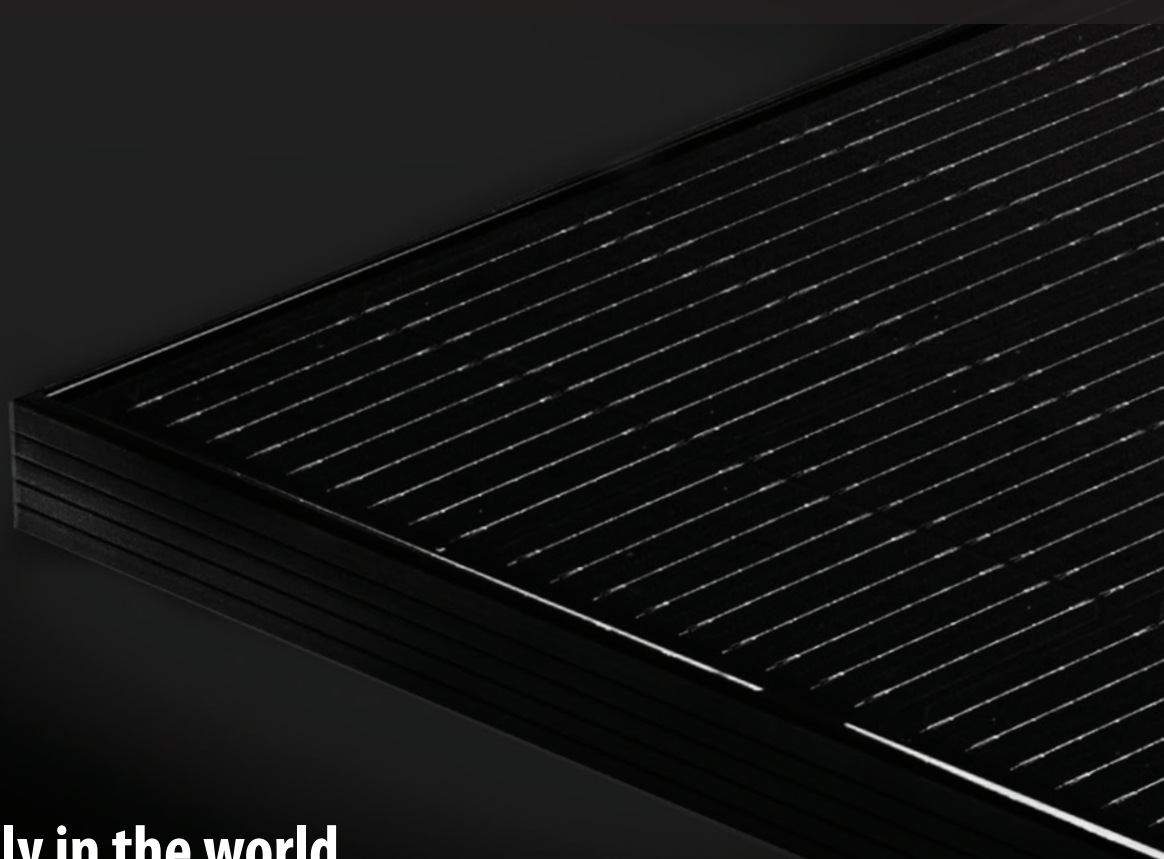

The one & only in the world with **25 years of 100 % Output Power Guarantee**




100 % Output Power Guarantee



0 % Effective Degradation Rate



+11 % More Energy

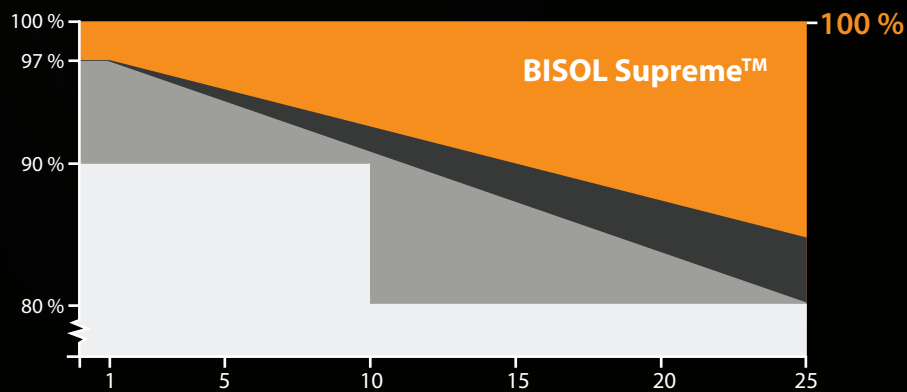

- Specialized equipment, materials tested to destruction, unique processes
- Individualised QR code
- Improved temperature coefficients
- Lower NOTC
- PID, LID and other ID free
- 25-year product guarantee




Get your
BISOL Supreme™ Cashback.




Limited to 30 MW per BISOL client


I-V Curve at Various Irradiation Levels

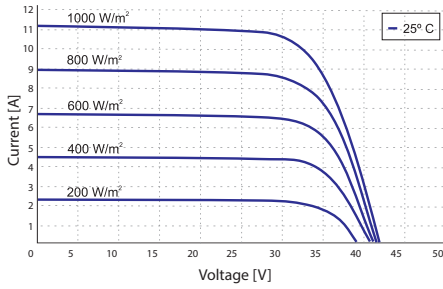


I-V Curve at Various Cell Temperatures

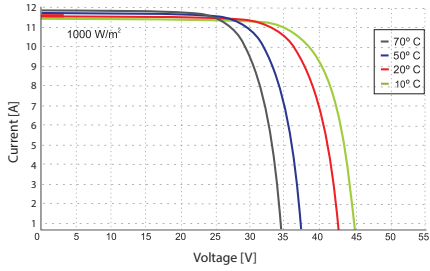

Dimensions

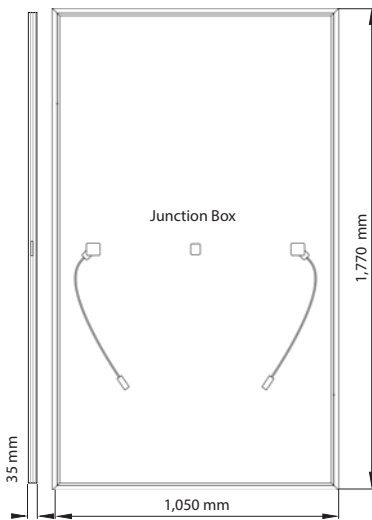

Frame Cross Section



Electrical Specifications @ STC (AM1.5, 1,000 W/m², 25 °C):

Module Type	BDO	360	365
Nominal Power	P_{MPP} [W]	360	365
Short Circuit Current	I_{SC} [A]	11.30	11.35
Open Circuit Voltage	V_{OC} [V]	41.30	41.60
MPP Current	I_{MPP} [A]	10.55	10.60
MPP Voltage	V_{MPP} [V]	34.20	34.50
Module Efficiency	η_M [%]	19.40	19.60
Fill Factor	[%]	77.30	77.50
Power Output Tolerance		±10 W	
Maximum Reverse Current		20 A	
Protection Class		Class II	

Additional power classes available upon request. Efficiency at irradiation 200 W/m²: 99.3 % of STC efficiency or higher. Tolerances for V_{OC} and I_{SC} are 3 %.

Thermal Specifications:

Current Temperature Coefficient	α	+ 0.073 %/°C
Voltage Temperature Coefficient	β	- 0.28 %/°C
Power Temperature Coefficient	γ	- 0.34 %/°C
NOCT		43 ± 2 °C
Temperature Range		- 40 °C to + 85 °C

Mechanical Specifications:

Length x Width x Thickness	1,770 x 1,050 x 35 mm
Weight	20.5 kg
Solar Cells	120 Half-Cut mono c-Si / 166 mm x 166 mm
Junction Box / Connectors / IP	Three bypass diodes / MC4 compatible / IP 68
Cable Length	Default: 1,200 mm On demand (for portrait orientation): 300 mm
Frame	Anodized Al with drainage holes / rigid anchored corners
Glass	3.2 mm AR coating tempered glass / high-transparency / low-iron content
Certified Test Load (Snow / Wind)	5,400 Pa / 2,400 Pa
Impact Resistance	Hailstone / Ø 25 mm / 83 km/h (51 mph)

Tolerances of values are ±5 %. Unspecified product properties remain under full discretion of BISOL Production.

In Compliance With:



Certificates available upon special request. Additional charges may apply.

Packaging Information:

Modules per Pallet	Packing Dimension: Length/Width/Height	Stackable	Packing Weight	Tot. Nr. of Pallets/Load
30	181 x 109 x 128 cm	3 pallets	664 kg	28

Additional terms & conditions apply. Please see *Standard Limited Guarantee and General Sales Terms & Conditions*.

© BISOL Production Ltd. February 2022. All rights reserved. All information presented in this document is subject to change without prior notice and serve for informative purposes only.