


HT54-18X

Single Glass PERC PV Module

HIGH High power

395W/400W
405W/410W/415W

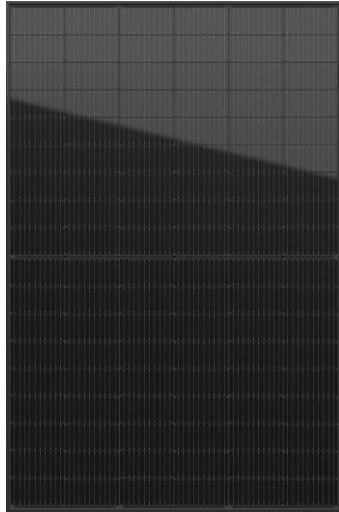

- Module Efficiency: 21.3%
- No. of Cells 108(6×18)
- Weight 21.0 (±0.5) kg
- Dimensions 1722×1134×30mm
- Monocrystalline 182×91mm



MULTIWAY+

Shanghai Aerospace Automobile Electromechanical Co., Ltd.
Website: www.ht-saae.com
E-mail: pvmarketing@ht-saae.com



Factory:
Lianyungang Shenzhou New Energy CO., Ltd.
Turkey HT Solar Energy Joint Stock Company



Half cut cell technology can reduce the internal power loss and improve module overall power. Excellent heat dissipation avoids hot spot production.



The optimized number and width of main gate lines, Maximize the light receiving area of modules and Reduce module power consumption.




Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs

12Ys

Products warranty

25Ys

Warranty on power output



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

EL

Microcrack resistant enhance reliability, double EL tested of high quality control.

5W

Positive tolerance 0/+5w guaranteed




Entire module certified to with stand extreme wind(2400 Pa) and snow loads (5400 Pa)


Anti PID

PID resistant

Comprehensive and first-rate certification system

IEC 61215:2016, IEC 61730:2016 Latest Standard ISO 9001, ISO 14001 and ISO 45001, meeting the highest international standards Strict quality control



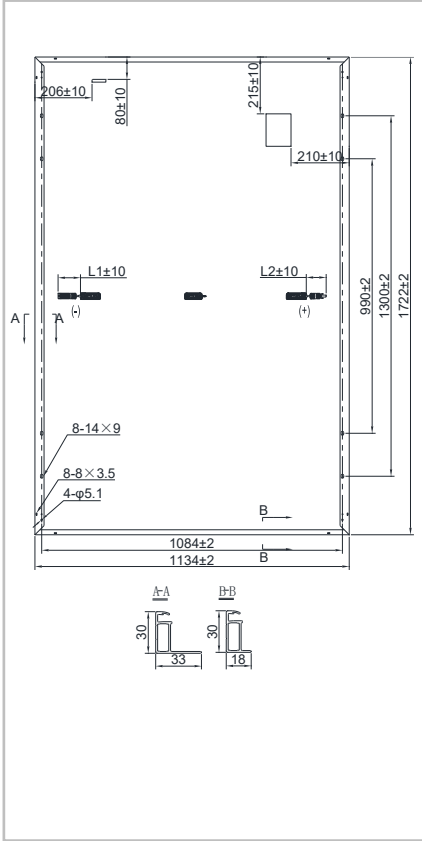

Electrical Characteristics (STC)

Module Type	HT54-18X				
Maximum Power(Pmax)	395W	400W	405W	410W	415W
Open Circuit Voltage(Voc)	36.90V	37.05V	37.19V	37.33V	37.48V
Short Circuit Current(Isc)	13.75A	13.83A	13.91A	13.98A	14.06A
Maximum Power Voltage(Vmp)	31.01V	31.17V	31.31V	31.44V	31.60V
Maximum Power Current(Imp)	12.74A	12.84A	12.95A	13.05A	13.14A
Module Efficiency	20.2%	20.5%	20.7%	21.0%	21.3%
Power Tolerance	0 ~ +5W				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	25A				
Operating Temperature	-40°C to +85°C				


* STC: AM 1.5, Irradiance 1000W/m², module temperature 25°C

Electrical Characteristics (NMOT)


Module Type	HT54-18X				
Maximum Power(Pmax)	294W	298W	301W	305W	309W
Open Circuit Voltage(Voc)	34.97V	35.12V	35.25V	35.38V	35.52V
Short Circuit Current(Isc)	11.10A	11.16A	11.23A	11.28A	11.35A
Maximum Power Voltage(Vmp)	29.39V	29.54V	29.68V	29.80V	29.95V
Maximum Power Current(Imp)	10.00A	10.09A	10.14A	10.23A	10.32A

* NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

IV Curves

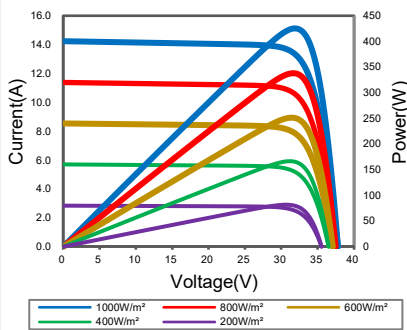

Warranty

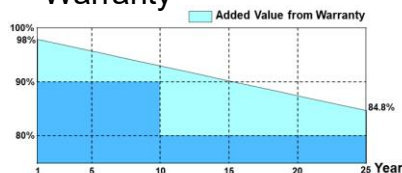

12-year product warranty*

25-year warranty on power output*

* Specific information is referred to the product quality guarantee

Nominal Module Operating Temperature(NMOT)	43±2°C	
Temperature Coefficient of Pmax	γ (Pm)	-0.33%/°C
Temperature Coefficient of Voc	β (Voc)	-0.26%/°C
Temperature Coefficient of Isc	α (Isc)	0.042%/°C
Solar Cells	Monocrystalline 182× 91mm	
No. of Cells	108 (6×18)	
Dimensions	1722mm×1134mm×30mm	
Weight	21.0(±0.5)kg	
Glass	High light transmittance coated tempered glass	
Frame	Anodized aluminum alloy	
Junction Box	IP68	
Cable	4mm ² (IEC) length: (+) 200mm, (-) 300mm	
Connectors	MC4 / MC4 Compatible	
Packaging Configuration	36 pcs/box: 936 pcs/ 40' HQ Container	

*The module recycling should be carried out by the professional institutions at the end of module life cycle

*Copyright@2022V3 Specifications are subject to change without further notification