




MODEL SV72

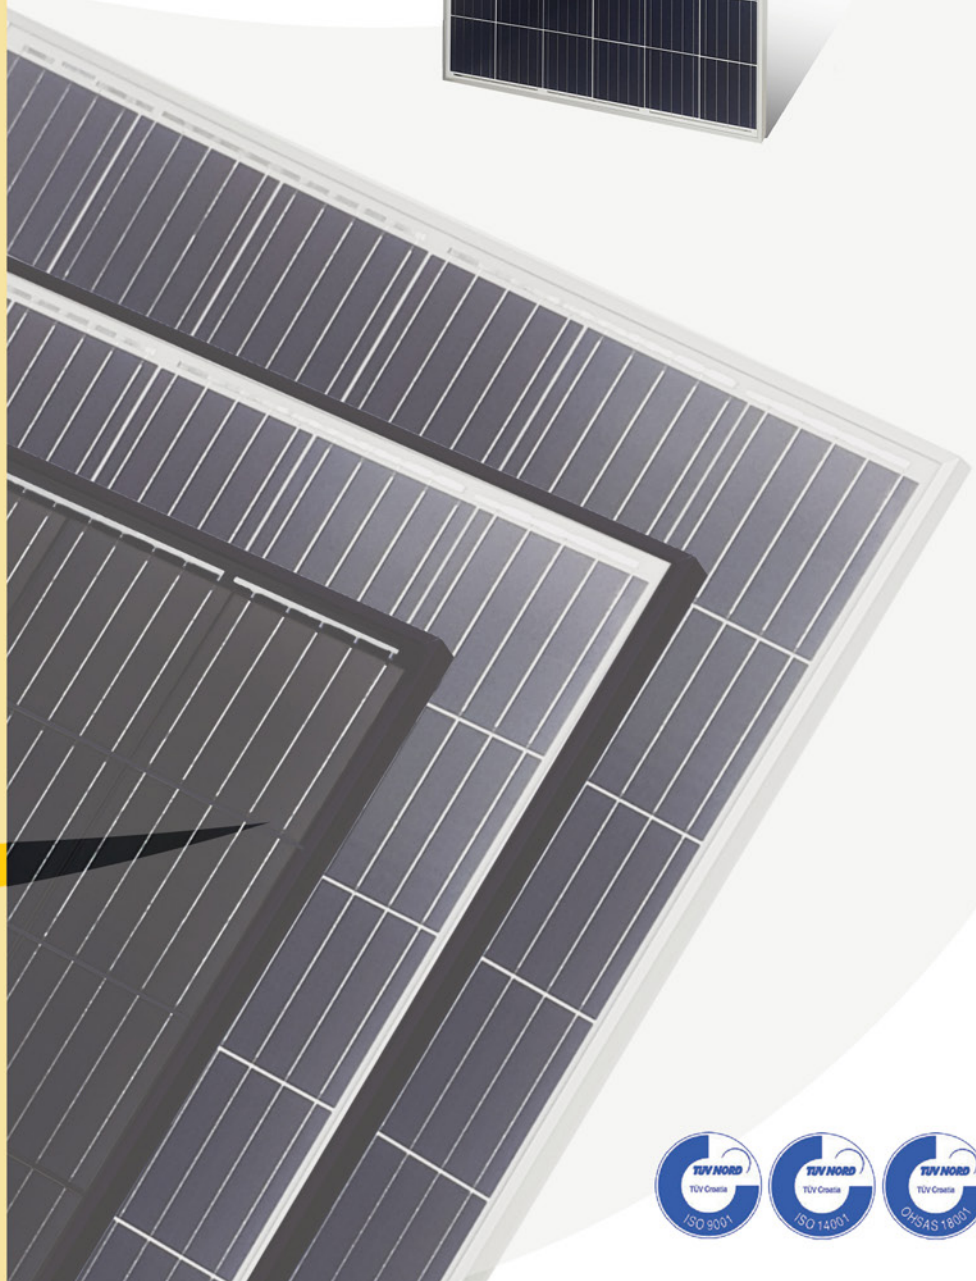

-  Premium quality
-  Power output range 335-350 Wp
-  100% EL testing
-  Mechanical load up to 5400 Pa
-  Low weight
-  Module efficiency up to 18,04 %
-  Positive power tolerance -0/+4,9 W
-  Made in Europe
-  IEC EN 61215
IEC EN 61730-1, -2
-  IEC EN 62716 Ed.1
-  IEC EN 61701
-  IEC TS 62804-1
(PID resistance)

Warranty:

- 10** years manufacturing defects
- 12** years limited, 90% output power
- 25** years limited, 80% output power



Electrical parameters at Standard Test Conditions (STC)					
MODEL		SV72-335	SV72-340	SV72-345	SV72-350
Peak power P_{MPP}	[W]	335	340	345	350
Peak power tolerance	[W]	-0/+4,9			
Short circuit current I_{SC}	[A]	9,01	9,05	9,10	9,14
Open circuit voltage V_{OC}	[V]	47,23	47,52	47,81	48,10
Rated current I_{MPP}	[A]	8,56	8,61	8,65	8,70
Rated voltage V_{MPP}	[V]	39,20	39,58	40,00	40,38
Current and voltage tolerance	[%]	± 3			
Module efficiency	[%]	17,26	17,52	17,78	18,04

STC: 1000W/m² irradiance, 25 °C cell temperature, AM1, 5 g spectrum according to EN 60904-3
Average relative efficiency reduction of 3,4 % at 200 W/m² according to EN 60904-1

Electrical parameters at Nominal Operating Cell Temperature (NOCT)					
MODEL		SV72-335	SV72-340	SV72-345	SV72-350
Peak power P_{MPP}	[W]	242,2	246,0	249,8	253,6
Peak power tolerance	[W]	-0/+4,9			
Short circuit current I_{SC}	[A]	7,28	7,32	7,36	7,39
Open circuit voltage V_{OC}	[V]	43,0	43,3	43,6	43,8
Rated current I_{MPP}	[A]	6,92	6,97	7,00	7,04
Rated voltage V_{MPP}	[V]	35,0	35,3	35,7	36,0

NOCT: module operating parameters at 800 W/m² irradiance, 20 °C ambient temperature, 1 m/s wind speed

MECHANICAL DATA	
Dimensions (H x W x D)	[mm] 1956 x 992 x 40
Weight	[kg] 22,5
Solar cells	72 cells, polycrystalline Si (PERC), 156 x 156 mm +/- 1mm
Cells encapsulation	Ethylene vinyl acetate (EVA)
Front	Tempered solar glass, 3,2 mm
Back	Composite polyester Film
Frame	Anodized aluminium frame with twin-wall profile and drainage holes
Junction box	IP67 with 3 Bypass diodes,
Cable and connectors	Solar cable 4 mm ² , length 1200 mm

NOTE: For extended models, SV72 YYY, voltages and currents can vary where YYY is optional based on the chosen YYY variant (YYY = letter(s), F for black frame, B for silver frame and black backsheet, BC for full black module)

OPERATING CONDITIONS		
Temperature range	[°C]	-40 to +85
Maximum system voltage	[V]	1000
Max. series fuse rating		15A
Limiting reverse current		15A
Maximum surface load capacity		5400 Pa (Snow load)
Resistance against hail		Max. diameter of 25 mm with impact speed 23 m/s

THERMAL CHARACTERISTICS		
Temperature coefficient of P_{MPP}	[%/K]	-0,41
Temperature coefficient of I_{SC}	[%/K]	0,05
Temperature coefficient of V_{OC}	[%/K]	-0,31

