
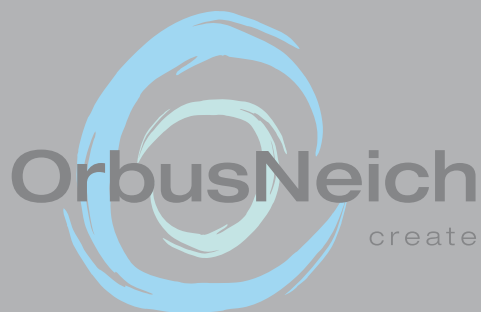


Product Information Guide

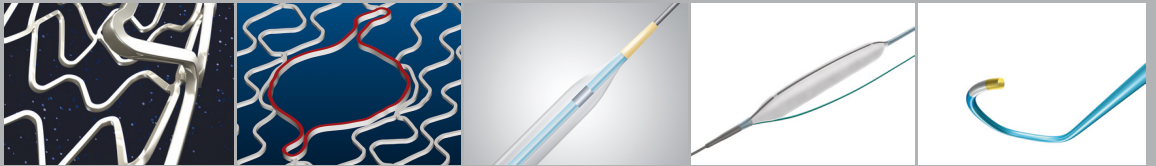

LEARN THE PAST | OBSERVE THE PRESENT | **CREATE** THE FUTURE

CONTACT INFORMATION

E-mail Info@OrbusNeich.com
Website www.OrbusNeich.com

Customer Service
Phone +31.33.254.4294
Fax +31.33.254.4297

Toll Free Number Customer Service*
Phone 00800.0254.1150
Fax 00800.0254.1151

* Only for Belgium, France, Germany, Ireland,
The Netherlands, and United Kingdom

Corporate Headquarters

25th Floor, Neich Tower
128 Gloucester Road
Wanchai, Hong Kong
Phone +852.2802.2288
Fax +852.2507.3532

Advanced Research & Development

5363 N.W. 35th Avenue
Ft. Lauderdale, FL 33309
USA
Phone +1.954.730.0711
Fax +1.954.730.7601

Global Marketing & Sales Headquarters

Production Facility

Drs. W. van Royenstraat 5
3871 AN Hoevelaken
The Netherlands
Phone +31.33.254.1150
Fax +31.33.254.1151

Production Facility

Product Development

1 Jinkui Road
Fuitian Free Trade Zone
Shenzhen 518038
China
Phone +86.755.8358.0181
Fax +86.755.8358.0169

**OrbusNeich products are sold through a global sales and distributor network.
Please contact our office in The Netherlands for further information.**

CONTACT INFORMATION

Global Marketing & Sales Headquarters

Production Facility

Drs. W. van Royenstraat 5
3871 AN Hoevelaken
The Netherlands
Phone +31.33.254.1150
Fax +31.33.254.1151

Regional Sales Offices

China, Beijing

No. 501, Tower F, Fuhua Mansion
No. 8 North Chaoyangmen Street
Dongcheng District
Beijing 100027
China
Phone +86.10.6554.4906
Fax +86.10.6554.4808

China, Guangzhou

17D Yueyun Mansion
No.3 Zhongshan 2 Road
Dongshan Qu, Guangzhou
Guangdong 510080
China
Phone +86.20.3762.0958
Fax +86.20.3762.0496

China, Shanghai

Rm 1503, Italy Grade Building
No. 446 Zhaojiabang Road
Shanghai 200031
China
Phone +86.21.6466.9442
Fax +86.21.6437.4292

Germany

Gustav-Stresemann-Ring 1
65189 Wiesbaden
Germany
Phone +49.611.5057.820
Fax +49.611.5057.818

Japan, Tokyo

3-6-11 Uehara
Shibuya-ku
151-0064 Tokyo
Japan
Phone +81.3.5738.5750
Fax +81.3.5738.5757

Korea

Rm.1013 Suseo Hyundai
Venture Ville
713 Suseo-dong, Kangnam-ku,
Seoul 135-539
Korea
Phone +82.2.2226.7331
Fax +82.2.2226.7332

Malaysia

No. 23, 2nd Floor
USJ 10/1E Taipan Triangle
Petaling Jaya, Selangor DE, 47620
Malaysia
Phone +603.5632.4775
Fax +603.5632.5077

Singapore

28C Stanley Street
068737
Singapore
Phone +65.65.34.3230
Fax +65.62.27.3235

Taiwan

3rd Floor, No. 96-2
Min Tsu E. Road
Taipei
Taiwan
Phone +886.2.2591.8600
Fax +886.2.2591.8477

United Kingdom

Eagle House, Joule Road
West Portway
Andover, Hampshire
SP10 3UX
United Kingdom
Phone +44.84.5003.0101
Fax +44.87.1900.1387

**OrbusNeich products are sold through a global sales and distributor network.
Please contact our office in The Netherlands for further information.**

BANK DETAILS

ABN Amro Bank Details

General

	Euro (€) Account	USD (\$) Account
Account	443290363	545831768
BIC	ABNANL2A	ABNANL2A
IBAN	NL82ABNA0443290636	NL87ABNA0545831768

VAT Number NL817823636B01
Chamber of Commerce 32116966

Local Country Payments

Belgium

ABN Amro Bank N.V.
Rekening nr/
Numéro du compte 720-5400727-70

France

ABN Amro Bank N.V.
Code banque 18739
Code guichet 00001
Numéro du compte 00200793462
Clé de contrôle 25

Germany

Deutsche Bank AG
Kontonummer 0122101 00
Bankleitzahl 51070024

United Kingdom

ABN Amro Bank N.V.
Sort code 40-50-30
Account 40262618

**OrbusNeich products are sold through a global sales and distributor network.
Please contact our office in The Netherlands for further information.**

BARCODE INFORMATION

OrbusNeich products are labeled with the EAN128 barcode format. This barcode format is used worldwide by the medical industry.

Genous SDS 3.5 mm / 13 mm

(01)08717853290565(17)100415(30)1(10)FA1234567

REF	235-132-5	LOT	FA1234567
-----	-----------	-----	-----------

The barcode consists of several parts called identifiers, (01), (17), (30), (10). Below is an explanation of the numbers in each section:

- (01) Section:
 - o 0 is a packaging indicator. 0 indicates a carton packaging level
 - o 871785329 is the labeler identification number. This is the company registration code of OrbusNeich Medical B.V.
 - o 0565 is a product identification code assigned by the Code Issuing Authority (pre-assigned and different than the catalogue number)
- (17) Section: 100415 is the expiry date yymmdd: 2010-April 15th
- (30) Section: 1 is the quantity per package
- (10) Section: FA1234567 is the lot number

REF "235-132-5" is the catalogue number


LOT "FA1234567" is the lot number

For a full list of barcode numbers from our entire product line please visit our website at www.orbusneich.com/barcode

Bio-engineered Stents

Genous™


BIO-ENGINEERED R STENT™

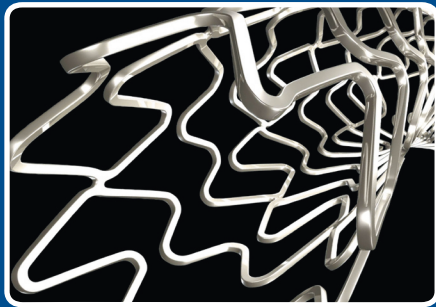

PRODUCT DESCRIPTION



The Genous Bio-engineered R stent is at the forefront of the future approach to preventing thrombosis and minimizing restenosis. Genous promotes tissue healing at the stent injury to occur in a rapid and controlled manner, rather than indiscriminately inhibiting an excessive healing reaction with potent antiproliferative drug eluting stents.

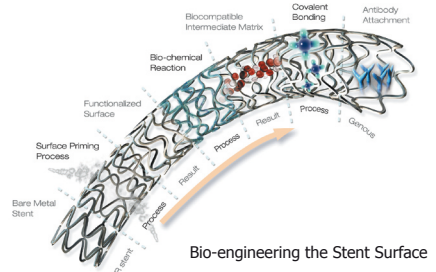

Stent Specifications

Strut dimensions	0.0035" (0.09mm; width) x 0.0040" (0.10mm; thickness)
Radiopacity	Moderate
Material	316L stainless steel
Sidebranchability	4.5mm
Foreshortening	<1%*
Recoil	<4%*
Vessel wall coverage	17%*
Radial force (to collapse)	>25 psi*

Balloon Specifications

Proximal shaft	Hypotube
Nominal pressure	9 atm
Rated burst pressure	16 atm
Average burst pressure	27 atm
Crossing profile	<0.043" (<1.09mm)*
Catheter tip length	2.5mm
Maximum guidewire OD	0.014"
Shaft (proximal/distal)	2.2F/2.9F
Guiding catheter compatibility	5F (0.057" ID min) for 2.5, 2.75mm and 6F (0.068" ID min) for 3.0, 3.5, 4.0mm

* 3.0mm diameter stent

Bio-engineered Surface Specifications

Coating	Biocompatible intermediate coating (nanometers thin)
Antibody	Anti-hCD34 Antibody
Antibody attachment	Covalently bonded onto the biocompatible intermediate matrix

Not available for sale in the USA



COMPLIANCE TABLE



GENOUS R STENT™ 2.5 - 4.0mm COMPLIANCE TABLE

PRESSURE (ATM)	2.5mm	2.75mm	3.0mm	3.5mm	4.0mm	
6	2.41	2.66	2.91	3.40	3.89	
7	2.44	2.69	2.94	3.43	3.92	
8	2.47	2.72	2.97	3.47	3.96	
9	2.50	2.75	3.00	3.50	4.00	← NOMINAL
10	2.53	2.78	3.03	3.53	4.04	
11	2.56	2.81	3.06	3.57	4.08	
12	2.59	2.84	3.09	3.60	4.11	
13	2.61	2.87	3.13	3.63	4.15	
14	2.64	2.90	3.16	3.67	4.19	
15	2.67	2.93	3.19	3.70	4.23	
16	2.70	2.96	3.22	3.73	4.27	← RATED BURST PRESSURE
17	2.73	2.99	3.25	3.77	4.31	
18	2.76	3.02	3.28	3.80	4.34	
19	2.78	3.05	3.32	3.84	4.38	
20	2.81	3.08	3.35	3.87	4.42	



These nominal in vitro device specifications do not take into account any lesion resistance. These measurements indicate stent inner diameter. The stent sizing should be confirmed angiographically. Do not exceed RBP.

ORDERING INFORMATION


↔ Ø	9mm	13mm	15mm	18mm	23mm	28mm	33mm
2.5mm	225-092-5	225-132-5	225-152-5	225-182-5	225-232-5		
2.75mm	227-092-5	227-132-5	227-152-5	227-182-5	227-232-5		
3.0mm	230-092-5	230-132-5	230-152-5	230-182-5	230-232-5	230-282-5	230-332-5
3.5mm	235-092-5	235-132-5	235-152-5	235-182-5	235-232-5	235-282-5	235-332-5
4.0mm	240-092-5	240-132-5	240-152-5	240-182-5	240-232-5	240-282-5	240-332-5




Bare Metal Stents

*blazer*TM

Cobalt Chromium Stent

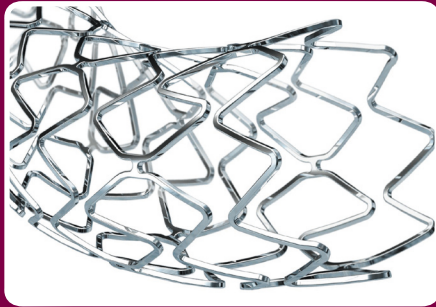

PRODUCT DESCRIPTION

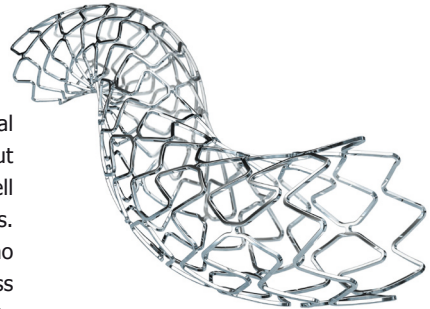

Dual Helix Design

Blazer's unique dual helix design provides natural conformability and enormous radial strength without comprising its extreme flexibility. Each individual cell can be dilated up to 4.5mm for side branch access. The Blazer is L605 cobalt chromium, which has no molybdenum and less nickel than 316L stainless steel and MP35N cobalt chromium. Some patients are allergic to both nickel and molybdenum and can develop restenosis as a result.

Stent Specifications

Strut dimensions	0.0034" (0.09mm; width) x 0.0032" (0.08mm; thickness)
Radiopacity	Moderate
Material	L605 cobalt chromium alloy
Sidebranchability	4.5mm
Foreshortening	<2%*
Recoil	<5%*
Vessel wall coverage	14%*
Radial force (to 50% collapse)	26 psi*

Balloon Specifications

Proximal shaft	Hypotube
Nominal pressure	9 atm
Rated burst pressure	16 atm
Average burst pressure	31 atm
Nominal crossing profile	0.038" (0.97mm)*
Catheter tip length	3mm
Maximum guidewire OD	0.014"
Shaft (proximal/distal)	2.3F/2.9F
Guiding catheter compatibility	5F (0.056" ID min)

* 3.0mm diameter stent

Not available for sale in the USA



COMPLIANCE TABLE



COMPLIANCE TABLE: 2.5 – 4.0mm


PRESSURE (ATM)	2.5mm	2.75mm	3.0mm	3.5mm	4.0mm
6	2.38	2.61	2.87	3.37	3.88
7	2.42	2.66	2.91	3.42	3.92
8	2.46	2.70	2.96	3.46	3.96
9 NOM	2.50	2.75	3.00	3.50	4.00
10	2.54	2.80	3.04	3.54	4.04
11	2.58	2.84	3.09	3.58	4.08
12	2.62	2.89	3.13	3.63	4.12
13	2.66	2.94	3.18	3.67	4.16
14	2.70	2.99	3.22	3.70	4.21
15	2.74	3.03	3.27	3.75	4.25
16 RBP	2.78	3.08	3.31	3.79	4.29
17	2.82	3.13	3.36	3.83	4.33
18	2.85	3.17	3.40	3.87	4.37
19	2.89	3.22	3.45	3.92	4.41
20	2.93	3.27	3.49	3.96	4.45

The nominal in vitro device specifications do not take into account any lesion resistance. The measurements indicate stent inner diameter. The stent sizing should be confirmed angiographically. Do not exceed RBP.

G-10-0120 Rev 02



ORDERING INFORMATION

	9mm	13mm	15mm	18mm	23mm	28mm	33mm
2.5mm	225-092-6	225-132-6	225-152-6	225-182-6	225-232-6		
2.75mm	227-092-6	227-132-6	227-152-6	227-182-6	227-232-6		
3.0mm	230-092-6	230-132-6	230-152-6	230-182-6	230-232-6	230-282-6	230-332-6
3.5mm	235-092-6	235-132-6	235-152-6	235-182-6	235-232-6	235-282-6	235-332-6
4.0mm	240-092-6	240-132-6	240-152-6	240-182-6	240-232-6	240-282-6	240-332-6




blazer

R STENT™

R stent



PRODUCT DESCRIPTION

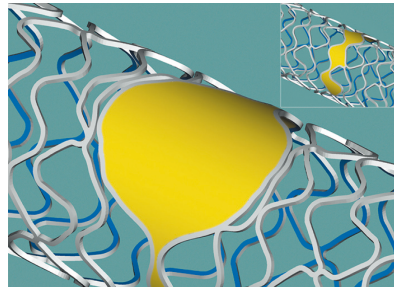

Up to 4.5mm sidebranch access

The design of the coronary R stent is unique. Its patented dual helix configuration provides omni-directional flexibility and extremely high radial strength. The cells in this region can be expanded to up to 4.5mm in diameter to enable excellent sidebranch access for bifurcation stenting.

Stent Specifications

Strut dimensions	0.0035" (0.09 mm; width) x 0.0040" (0.10mm; thickness)
Radiopacity	Moderate
Material	316L stainless steel
Electropolishing	Ultra-smooth surface
Sidebranch access	4.5mm
Foreshortening	<1%*
Recoil	<4%*
Vessel wall coverage	17%*
Radial force (to collapse)	>25 psi*

Balloon Specifications

Proximal shaft	Hypotube
Nominal pressure	9 atm
Rated burst pressure	16 atm
Average burst pressure	25.5 atm
Crossing profile	<0.041" (<1.04 mm)*
Catheter tip length	2.5mm
Max guidewire OD	0.014"
Shaft (proximal/distal)	2.2F/2.8F
Guiding catheter compatibility	5F (0.058" ID min)

* 3.0mm diameter stent

Not available for sale in the USA



COMPLIANCE TABLE




R STENT™ EVOLUTION™ 2 2.5 - 4.0mm COMPLIANCE TABLE

PRESSURE (ATM)	2.5mm	2.75mm	3.0mm	3.5mm	4.0mm	
5	1.47	2.20	1.61	2.94	3.51	
6	2.25	2.67	2.65	3.34	3.86	
7	2.44	2.69	2.94	3.43	3.91	
8	2.47	2.72	2.97	3.47	3.96	
9	2.50	2.75	3.00	3.50	4.00	← NOMINAL
10	2.53	2.78	3.04	3.53	4.04	
11	2.56	2.81	3.07	3.57	4.09	
12	2.59	2.84	3.10	3.60	4.13	
13	2.61	2.87	3.13	3.64	4.18	
14	2.64	2.90	3.16	3.67	4.22	
15	2.67	2.92	3.20	3.70	4.27	
16	2.70	2.95	3.23	3.74	4.31	← RATED BURST PRESSURE
17	2.73	2.98	3.26	3.77	4.36	
18	2.76	3.01	3.29	3.81	4.40	
19	2.79	3.04	3.32	3.84	4.45	
20	2.81	3.07	3.36	3.87	4.49	

These nominal in vitro device specifications do not take into account any lesion resistance. The measurements indicate stent inner diameter. The stent sizing should be confirmed angiographically. Do not exceed RBP.



ORDERING INFORMATION


	9mm	13mm	15mm	18mm	23mm	28mm	33mm
2.5mm	225-092-2	225-132-2	225-152-2	225-182-2	225-232-2		
2.75mm	227-092-2	227-132-2	227-152-2	227-182-2	227-232-2		
3.0mm	230-092-2	230-132-2	230-152-2	230-182-2	230-232-2	230-282-2	230-332-2
3.5mm	235-092-2	235-132-2	235-152-2	235-182-2	235-232-2	235-282-2	235-332-2
4.0mm	240-092-2	240-132-2	240-152-2	240-182-2	240-232-2	240-282-2	240-332-2



Balloons

SAPPHIRE™

PTCA Dilatation Catheter

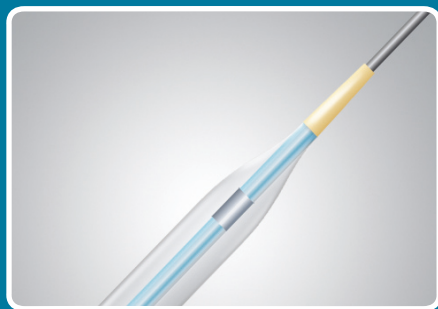


PRODUCT DESCRIPTION

SAPPHIRE™

Coronary Dilatation Catheter

Sapphire Coronary Dilatation Catheter is a balloon that combines advanced new technologies for ultimate crossability. The Sunflex tapered tip is superbly engineered for smooth lesion accessibility and ultra low tip profile. With specially formulated Slidematrix dual coating and the enhanced TiFo processing, Sapphire is ideal for lubricious crossing.



The 1.25mm balloon offers predictable crossability for your most challenging lesions. A truly well balanced performance from hub to tip. The smooth transition zone enhances trackability in tortuous anatomy and enhances visibility from dye injection in complete CTO procedures together with higher buckling force capabilities which maximize pushability. The Sapphire 1.25 is currently the only low profile balloon available in 5mm lengths.

Technical Specifications

Proximal shaft	1.9F
Distal shaft	2.36F (1.25mm) 2.55F (1.5 - 3.0mm) 2.7F (3.25 - 4.0mm)
Balloon material	Pebax
Balloon pleats	Tri-fold
Compliance	Semi-compliance
Tip length	2.0mm
Tip crossing profile	0.016"
Marker bands	2 markers (1mm in width) (note: 1 marker for 1.25mm and 1.5mm balloon only)
Coating	Slidematrix coating
Nominal pressure	6 atm
Rated burst pressure	16 atm
Tip entry profile	0.016"
Crossing profile	0.0233" (1.25mm)
Guiding catheter compatibility	5 French (0.056" ID min)

Not available for sale in the USA



SAPPHIRE

COMPLIANCE TABLE



Coronary Dilatation Catheter COMPLIANCE TABLE

PRESSURE (ATM)	1.25mm	1.5mm	2.0mm	2.25mm	2.5mm	2.75mm	3.0mm	3.25mm	3.5mm	4.0mm	
3	1.19	1.33	1.84	2.09	2.32	2.53	2.77	3.01	3.21	3.67	
4	1.21	1.40	1.91	2.15	2.39	2.62	2.87	3.11	3.33	3.81	
5	1.23	1.45	1.96	2.21	2.45	2.69	2.94	3.19	3.42	3.91	
6	NOM	1.25	1.50	2.00	2.25	2.50	2.75	3.00	3.25	3.50	4.00
7		1.27	1.54	2.04	2.29	2.54	2.80	3.05	3.30	3.57	4.07
8		1.29	1.57	2.07	2.32	2.58	2.84	3.10	3.35	3.62	4.14
9		1.31	1.60	2.09	2.35	2.61	2.88	3.13	3.39	3.67	4.19
10		1.34	1.63	2.12	2.37	2.63	2.91	3.17	3.43	3.72	4.24
11		1.36	1.65	2.14	2.39	2.66	2.95	3.20	3.46	3.76	4.29
12		1.38	1.67	2.16	2.41	2.68	2.97	3.23	3.49	3.79	4.33
13		1.40	1.69	2.18	2.43	2.70	3.00	3.26	3.52	3.83	4.37
14		1.42	1.71	2.20	2.45	2.72	3.02	3.28	3.55	3.86	4.41
15		1.44	1.73	2.21	2.47	2.74	3.05	3.30	3.57	3.89	4.44
16	RBP	1.47	1.75	2.23	2.48	2.76	3.07	3.32	3.59	3.91	4.47
17		1.49	1.76	2.24	2.49	2.77	3.09	3.34	3.62	3.94	4.50
18		1.51	1.78	2.25	2.51	2.79	3.10	3.36	3.64	3.96	4.53
19		1.53	1.79	2.27	2.52	2.80	3.12	3.38	3.65	3.99	4.55
20		1.55	1.80	2.28	2.53	2.82	3.14	3.40	3.67	4.01	4.58

The nominal in vitro device specifications do not take into account any lesion resistance. Do not exceed RBP.

G-10-140 Rev 02



ORDERING INFORMATION

↔	5mm	8mm	10mm	15mm	20mm	30mm
1.25mm	103-1205	103-1208	103-1210	103-1215		
1.5mm			103-1510	103-1515	103-1520	
2.0mm			103-2010	103-2015	103-2020	
2.25mm			103-2210	103-2215	103-2220	
2.5mm			103-2510	103-2515	103-2520	103-2530
2.75mm			103-2710	103-2715	103-2720	
3.0mm			103-3010	103-3015	103-3020	103-3030
3.25mm			103-3210	103-3215	103-3220	
3.5mm			103-3510	103-3515	103-3520	103-3530
4.0mm			103-4010	103-4015	103-4020	




SAPPHIRE

SAPPHIRE™

NC

Coronary Dilatation Catheter

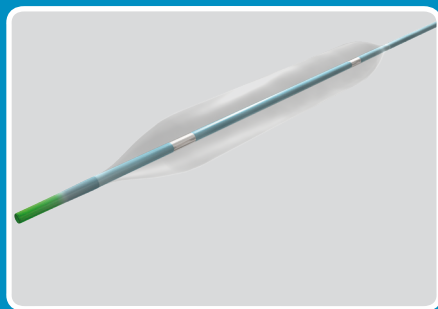


Sapphire NC

PRODUCT DESCRIPTION

SAPPHIRE™ NC

Coronary Dilatation Catheter

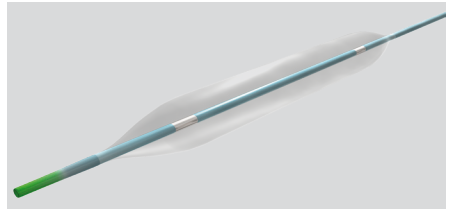

Sapphire NC is a non-compliant balloon, has controlled growth of only 0.6% per atmosphere of pressure over the working pressure range for controlled dilatations. Furthermore, it has the highest rated burst pressure available on the market for confident treatment of tough, calcified lesions and for post-stent dilatation. Sapphire NC combines advanced precision and material engineering technologies to provide optimum reliability and deliverability. Sapphire NC is available in a wide range of sizes for precise dilatation to match popular stent lengths.

Technical Specifications

Proximal shaft	1.9F
Distal shaft	2.7F
Leading tip	2.65mm HIST tip
Balloon material	HIPP (Nylon)
Balloon compliance	Non compliant
Balloon pleats	Tri-fold
Marker bands	2 for all sizes (1mm in width)
Tip entry profile	0.016"
Crossing profile (3.0mm)	0.0295"
Coating	Slidematrix coating <ul style="list-style-type: none">• Hydrophilic (Tip)• Invio™ (Balloon to proximal exit marker)
Nominal pressure	12atm
Rated burst pressure	22atm
Mean burst pressure	≥ 30atm
Guiding catheter compatibility	5 French (0.056" ID min)

Not available for sale in the USA

SAPPHIRE™ NC

COMPLIANCE TABLE



COMPLIANCE TABLE: 2.0-4.0mm

PRESSURE (ATM)	2.0mm	2.25mm	2.5mm	2.75mm	3.0mm	3.25mm	3.5mm	3.75mm	4.0mm
6	1.94	2.18	2.42	2.65	2.89	3.14	3.38	3.61	3.85
8	1.96	2.20	2.44	2.69	2.93	3.17	3.42	3.66	3.90
10	1.98	2.23	2.47	2.72	2.96	3.21	3.46	3.70	3.95
12	NOM	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75
14		2.02	2.27	2.53	2.78	3.04	3.29	3.54	3.80
16		2.04	2.30	2.56	2.81	3.07	3.33	3.58	3.84
18		2.06	2.32	2.58	2.85	3.11	3.36	3.62	3.89
20		2.08	2.35	2.61	2.88	3.14	3.40	3.66	3.93
22	RBP	2.10	2.37	2.64	2.91	3.18	3.44	3.70	3.98
24		2.12	2.39	2.67	2.94	3.22	3.48	3.74	4.03
26		2.14	2.42	2.70	2.97	3.25	3.52	3.78	4.07

The nominal in vitro device specifications do not take into account any lesion resistance. Do not exceed RBP.




G-10-0149 Rev 01

ORDERING INFORMATION

	8mm	10mm	12mm	15mm	18mm
2.00mm	220-083-2	220-103-2	220-123-2	220-153-2	220-183-2
2.25mm	222-083-2	222-103-2	222-123-2	222-153-2	222-183-2
2.50mm	225-083-2	225-103-2	225-123-2	225-153-2	225-183-2
2.75mm	227-083-2	227-103-2	227-123-2	227-153-2	227-183-2
3.00mm	230-083-2	230-103-2	230-123-2	230-153-2	230-183-2
3.25mm	232-083-2	232-103-2	232-123-2	232-153-2	232-183-2
3.50mm	235-083-2	235-103-2	235-123-2	235-153-2	235-183-2
3.75mm	237-083-2	237-103-2	237-123-2	237-153-2	237-183-2
4.00mm	240-083-2	240-103-2	240-123-2	240-153-2	240-183-2

scoreflex™

Coronary Dilatation Catheter

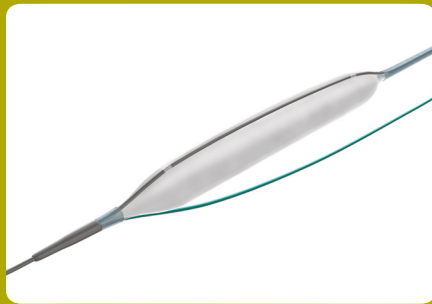


Scoreflex

PRODUCT DESCRIPTION



The Scoreflex Coronary Dilatation Catheter is designed for use in focused force angioplasty. The dual wire system creates a focal stress pattern to facilitate effective controlled plaque fracture at low-resolution pressure. Scoreflex has a low crossing profile and unbeatable trackability.

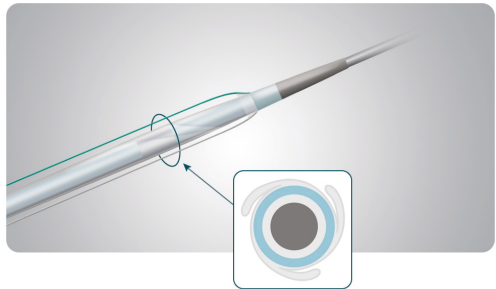

Tight Fold Processing

Technical Specifications

Proximal shaft	2.3F
Distal shaft	2.9F
Coating	Hydrophilic coating
Balloon material	Nylon
Balloon compliance	Semi-compliant
Balloon folding	TiFo
Marker bands	2 for all sizes (1mm in width)
Tip profile	0.020"
Crossing profile (3.0mm)	0.030"
Nominal pressure	6 atm
Rated burst pressure	16 atm
Guiding catheter compatibility	5 French (0.056" ID min)

Not available for sale in the USA



scoreflex

COMPLIANCE TABLE



COMPLIANCE TABLE: 2.0-4.0mm


PRESSURE (ATM)	2.0mm	2.5mm	3.0mm	3.5mm	4.0mm
4	1.96	2.45	2.94	3.43	3.92
6 NOM	2.00	2.50	3.00	3.50	4.00
8	2.04	2.55	3.05	3.57	4.08
10	2.08	2.60	3.11	3.63	4.15
12	2.12	2.65	3.17	3.70	4.23
14	2.16	2.70	3.22	3.76	4.31
16 RBP	2.20	2.75	3.28	3.83	4.38
18	2.23	2.80	3.34	3.90	4.46
20	2.27	2.86	3.39	3.96	4.53

The nominal in vitro device specifications do not take into account any lesion resistance. Do not exceed RBP.

G-10-0155 Rev 01



ORDERING INFORMATION


	10mm	15mm	20mm
2.0mm	620-103-1	620-153-1	620-203-1
2.5mm	625-103-1	625-153-1	625-203-1
3.0mm	630-103-1	630-153-1	630-203-1
3.5mm	635-103-1	635-153-1	635-203-1
4.0mm	640-103-1	640-153-1	640-203-1



Guiding Catheters

Lumina™


Guiding Catheter

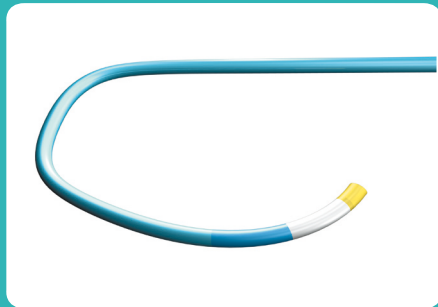

PRODUCT DESCRIPTION

Lumina™ Guiding Catheter

The Lumina 6F and 7F Guiding Catheters offer a wide inner body for device passage and visualization. Lumina gives you more possibilities for your interventional strategy.

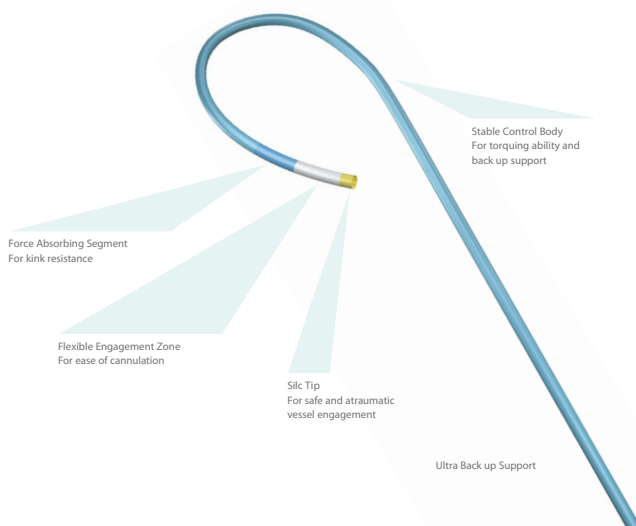

Quad System Technology for Optimal Performance

Technical Specifications

Outer dimension	6F	7F
Inner dimension	0,071"	0.081"
Inner layer	PTFE	PTFE
Catheter length	100cm	100cm

Not available for sale in the USA



ORDERING INFORMATION 6F

Shape	Catalog number
Judkins Left 3.5	416-JL-35-00
Judkins Left 3.5 Short Tip	416-JL-35-0T
Judkins Left 4	416-JL-40-00
Judkins Left 4 Short Tip	416-JL-40-0T
Judkins Left 4 Side Hole	416-JL-40-0H
Judkins Left 4.5	416-JL-45-00
Judkins Right 3.5	416-JR-35-00
Judkins Right 3.5 Angled Tip	416-JR-35-A0
Judkins Right 4	416-JR-40-00
Judkins Right 4 Angled Tip	416-JR-40-A0
Judkins Right 4 Short Tip	416-JR-40-0T
Judkins Right 4 Angled Tip Short Tip	416-JR-40-AT
Judkins Right 4 Side Hole	416-JR-40-0H
Judkins Right 4 Angled Tip Side Hole	416-JR-40-AH
Judkins Right 4.5	416-JR-45-00
Judkins Right 4.5 Angled Tip	416-JR-45-A0
Amplatz Left 1	416-AL-10-00
Amplatz Left 1 Short Tip	416-AL-10-0T
Amplatz Left 1 Side Hole	416-AL-10-0H
Amplatz Left 1.5	416-AL-15-00
Amplatz Left 2	416-AL-20-00
Amplatz Right 1	416-AR-10-00
Amplatz Right 1 Side Hole	416-AR-10-0H
Amplatz Right 2	416-AR-20-00
Ultra Backup Support 3	416-UB-30-00
Ultra Backup Support 3.5	416-UB-35-00
Ultra Backup Support 3.5 Side Hole	416-UB-35-0H
Ultra Backup Support 4	416-UB-40-00
Internal Mammary (100cm)	416-IM-10-00
Hockey Stick	416-HS-00-00
Left Coronary Bypass	416-LC-00-00
Right Coronary Bypass	416-RC-00-00



LUMINA

ORDERING INFORMATION 7F

Shape	Catalog number
Judkins Left 3.5	417-JL-35-00
Judkins Left 3.5 Short Tip	417-JL-35-0T
Judkins Left 4	417-JL-40-00
Judkins Left 4 Short Tip	417-JL-40-0T
Judkins Left 4 Side Hole	417-JL-40-0H
Judkins Left 4.5	417-JL-45-00
Judkins Left 5	417-JL-50-00
Judkins Right 3.5	417-JR-35-00
Judkins Right 3.5 Angled Tip	417-JR-35-A0
Judkins Right 4	417-JR-40-00
Judkins Right 4 Angled Tip	417-JR-40-A0
Judkins Right 4 Short Tip	417-JR-40-0T
Judkins Right 4 Angled Tip Short Tip	417-JR-40-AT
Judkins Right 4 Side Hole	417-JR-40-0H
Judkins Right 4 Angled Tip Side Hole	417-JR-40-AH
Judkins Right 4.5	417-JR-45-00
Judkins Right 4.5 Angled Tip	417-JR-45-A0
Judkins Right 5	417-JR-50-00
Amplatz Left 1	417-AL-10-00
Amplatz Left 1 Short Tip	417-AL-10-0T
Amplatz Left 1 Side Hole	417-AL-10-0H
Amplatz Left 1.5	417-AL-15-00
Amplatz Left 2	417-AL-20-00
Amplatz Right 1	417-AR-10-00
Amplatz Right 1 Side Hole	417-AR-10-0H
Amplatz Right 2	417-AR-20-00
Ultra Backup Support 3	417-UB-30-00
Ultra Backup Support 3.5	417-UB-35-00
Ultra Backup Support 3.5 Side Hole	417-UB-35-0H
Ultra Backup Support 4	417-UB-40-00
Internal Mammary (100cm)	417-IM-10-00
Hockey Stick	417-HS-00-00
Left Coronary Bypass	417-LC-00-00
Right Coronary Bypass	417-RC-00-00



LUMINA