

MX 43

Gas Detection Control Panel

- Analog and digital controller
- 4 or 8 lines /
16 to 32 detectors max
- Highly versatile controller
- Cost savings
on wiring installation



The next generation of controller



Certifications



ATEX



The Fixed Gas Detection People

OLDHAM
An Industrial Scientific Company

www.oldhamgas.com

MX 43

Controller presentation

The MX 43 is an analog and digital controller designed for the continuous measurement and control of the gases present in the atmosphere and for 4-20 mA or digital contact signal.

MX43 details

Smart keys make embedded menus very simple to use


Large graphic display



Front panel LEDs allow a very quick and basic overview of the installation.

MX 43 manages both digital lines and analog channels, and covers all needs for a wide variety of applications.


The MX 43 digital technology allows up to 32 detectors to be distributed on 8 lines for increased cost savings

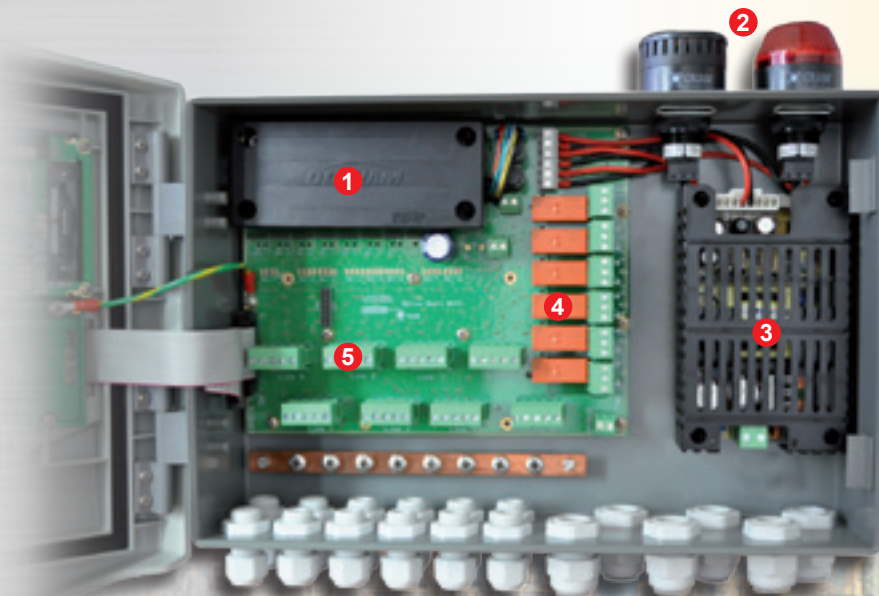

- 1 Internal battery
- 2 Strobe and horn
- 3 Alimentation
- 4 Power supply
- 5 Removable terminals

Graphic display


Normal Mode

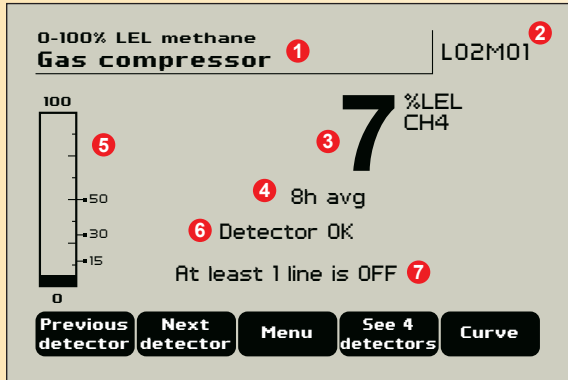

- 1 Measurement range, gas and detector tag
- 2 Detector address
- 3 Current value with unit and detected gas
- 4 Averaged value on the last 8 hours
- 5 Bar graph with alarm thresholds
- 6 Detector status (OK, OFF, fault)
- 7 MX 43 status information


Calibration Curve

Simplified procedure that enables time savings (i.e. non-intrusive and one-man calibration).

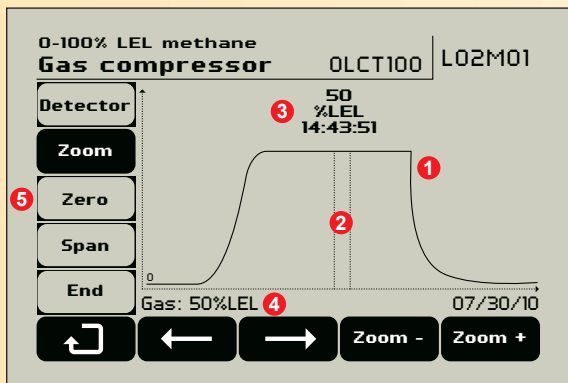

- 1 Calibration curve
- 2 Cursors for span settings
- 3 Measured value
- 4 Calibration gas value
- 5 Detector selection, zeroing and spanning


Alarm mode

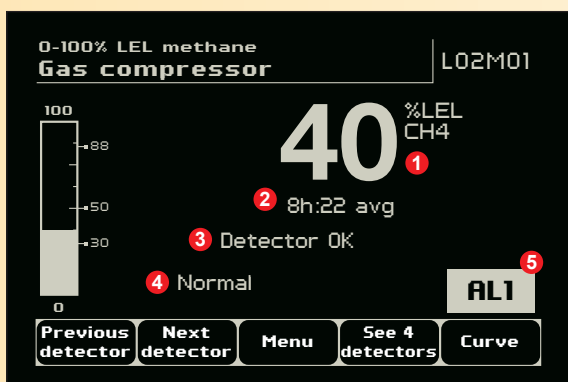

Reverse video in alarm conditions for immediate identification of the concerned detector.

- 1 Current value with unit and detected gas
- 2 Averaged value on the last 8 hours
- 3 Detector status (OK, OFF, fault)
- 4 MX 43 status information
- 5 Detector in alarm 1


In 4-channel display

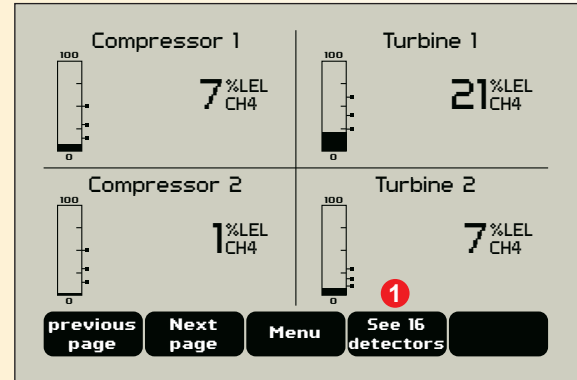

- 1 Up to 16 detectors can be displayed simultaneously

Data-logging

The MX 43 can store up to 512 alarm events, 512 fault events and 512 system events.

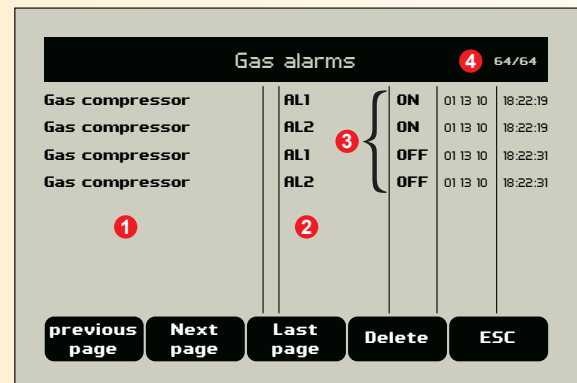

- 1 Detector tag
- 2 Event
- 3 Date and time of events appearance or clearance
- 4 Page number (up to 64 pages)

Modules

Different modules can be connected to the controller:

4 or 8-relay module



4 or 8-programmable-relay module can be located closer to the actuators for cost savings.

16-logic-input module



Addressable module of 16 logic input for recovery of digital information such as fire or intrusion alarms, emergency stop, limit switch activation, etc.

8-analog-input module




This module enables standard analog transmitters (gas or flame detectors for instance) to be connected on a digital line for cost savings.

4-analog-output module



Addressable 4- analog-output module which delivers 4 analog 4-20mA signal outputs (detector output copy, min, max, average of a group of detectors) for connection to a datalogger, a PLC, a Building Management System (BMS), etc.

Configuration example

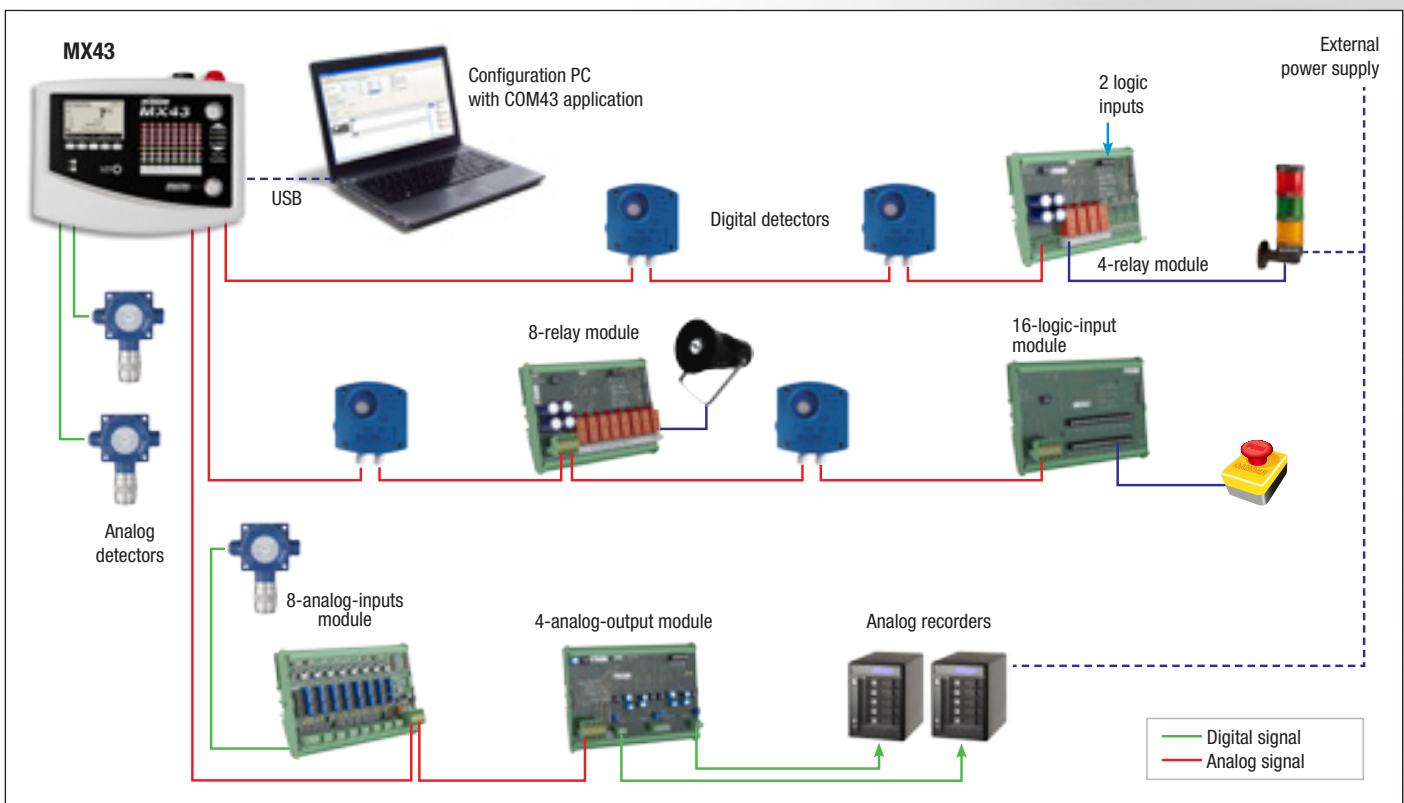

MX 43

Model	MX 43 gas detection control panel
Dimensions (wall-mounted version)	370 x 299 x 109 mm (14.6 x 11.8 x 4.3 inches)
Dimensions (rack)	19", 4U ; 482.8 x 177 x 192.5 mm (19.1 x 7 x 7.6 inches)
Ingress protection	IP55 (wall-mounted), IP31 (rack)
Cable entries (wall-mounted version)	12 M16 cable glands, 4 to 8 mm ² (8 to 11 AWG) outer diameter cable 6 M20 cable glands, 6 to 12 mm ² (7 to 9 AWG) outer diameter cable
Display	LCD back-lit display + smart keys Display in video inverse in case of fault Customizable by user (display 1 to 16 channels simultaneously, fixed or scrolling, on events...) Bar graph with alarm threshold
Visual indicators	7 LEDs per line 1 LED fault indicator 1 LED fault indicator
Buttons	5 smart keys 1 audible alarm accept/reset button
Operating use	
Operating temperature	-20°C to +50°C
Storage temperature	-20°C to +50°C
Humidity	5 to 95% RH
Power	100-240 Vac 50-60 Hz or 21-28 Vdc, 112 W max
Battery	Embedded back up power supply in option (0.6 Ah)
Consumption	500 mA min (without module)
Measurement lines	
Digital lines	8 maximum RS-485 communication, proprietary protocol, 9600 Baud 2 twisted shielded-pair cable
Analog channels	8 maximum 0-23 mA analog signal input (4 to 20 mA reserved for measurement) 120 Ohm load resistance 2 or 3-core shielded cable
Voltage (typical)	21 to 28Vdc
Maximum current output per line	500 mA
Maximum current output in total	2.4 A permanent (3.2 A intermittently)
Alarms	
Per channel	5 alarm levels (A1, A2, A3, Overscale, Underscale) + Fault Non-ambiguity reading option for combustible gases monitoring
Programmable thresholds	On instantaneous ou averaged values, rising or falling alarms, manual or automatic acknowledgement
On-board relays	5 fully programmable alarm relays 1 fault relay (non-configurable) Dry contact relay DPCO relays with contact rating of 250 Vca 2 A (inductive)
Digital outputs	To come: RS-485 Modbus RTU serial link
Approvals	
EMC	According to EN50270
ATEX	EN50271 and metrological performances according to EN60079-29-1
Low Voltage Directive	According to EN61010
CSA	Pending

Our fixed detector range



OLCT 10



OLCT 100



OLCT 80



OLCT 60



OLCT 60 / OLCT IR



OLCT IR



Flame detector

OUR MISSION

Preserving human life, above and below the earth.

Delivering highest quality, best customer service...
Every transaction, every time



www.oldhamgas.com



AMERICAS
Phone: +1-412-788-4353
Fax: +1-412-788-8353
info@indsci.com

ASIA PACIFIC
Phone: +65-6561-7377
Fax: +65-6561-7787
info@ap.indsci.com

EUROPE
Phone: +33-3-21-60-80-80
Fax: +33-3-21-60-80-00
info@oldhamgas.com



Ref. MX43_Lit_EN_v1

REV 0710