



## Gas cooler series EGK 10

In the chemical industry, petrochemistry or biochemistry, reliable process control relies on prompt and exact determination of the operating parameters.

Here, gas analysis is key for safe and efficient control of process flows, environmental protection and quality assurance. This benefits controlling flue gas emission in power stations or exhaust gas analysis in automotive engineering, as well as the efficient control of air separators or sterile production and packaging in the food industry.

Many of the analysis processes used in these fields require extracting the sample gas. This inevitably also extracts process-related contamination such as particles or moisture. These in turn can impact the measurement results or damage the measuring cells. The sample gas must therefore be conditioned before entering the analyser.

The EGK 10 is a compressor high performance cooler with a special heat exchanger. Suitable for wall-mounting or desktop operation.

Stainless steel heat exchanger

Rated cooling power 1450 kJ/h

Use as wall mounting or desktop housing

Compact size

Electronic control with cooling block temperature display

Adjustable outlet dew point and alarm thresholds

Self-monitoring

Dew point stability  $\pm 0.2$  °C

CFC-free



## Technical Data

### Gas Cooler Technical Data

Operational readiness:	after max. 15 minutes		
Rated cooling capacity (at 25 °C):	1450 kJ/h		
Ambient temperature:	5 °C to 50 °C		
Gas output dew temperature preset:	5 °C		
adjustable:	2 °C to 20 °C		
Alarm threshold adjustable um Dew point upper alarm threshold:	+1 °C bis +7 °C, factory setting 3 °C		
lower alarm threshold:	-1 °C to -3 °C, factory setting: -3 °C		
Dew point fluctuations static:	0.2 K		
in the entire specification range:	± 2 °C		
Protection class:	IP 20		
Housing:	Stainless steel		
Weight incl. heat exchanger:	approx. 32 kg		
Electric supply:	115 V, 60 Hz or 230 V, 50 Hz		
Electrical data:	230 V	115 V	
	Typical power input:	300 VA	260 VA
	max. operating current:	3.6 A	6.8 A
Starting current:	12 A (230 V), 28 A (115 V)		
Status output switching capacity:	230 V AC/ 150 V DC Changeover contact 2 A, 30 VA		
Max. pressure $p_{\max}$ :	5 bar		
Pressure drop $\Delta p$ ( $v = 1500$ l/h):	24 mbar		


### Flow parameter TS10

Inlet dew point (humidity)	Ambient temperature	Flow in NI/h at a gas inlet temperature of					Water per h per 1000 L/h
		60 °C	80 °C	100 °C	140 °C	180 °C	
40 °C (7 Vol%)	5...50 °C	3900	3500	3100	2600	2200	70 ml
50 °C (12 Vol%)	10...45 °C	3300	3000	2800	2450	2150	120 ml
	5...50 °C	1900	1750	1650	1450	1300	
55 °C (16 Vol%)	22...35 °C	3000	2800	2650	2350	2100	150 ml
	5...50 °C	1500	1400	1350	1200	1100	
60 °C (20 Vol%)	22...35 °C	2500	2350	2200	2000	1850	200 ml
	5...50 °C	1200	1100	1040	980	900	
65 °C (25 Vol%)	22...35 °C	-	1800	1750	1600	1450	265 ml
	5...50 °C	-	850	820	790	730	
70 °C (31 Vol%)	22...35 °C	-	1350	1280	1200	1150	365 ml
	5...50 °C	-	670	650	600	570	
80 °C (47 Vol%)	22...35 °C	-	720	700	650	630	730 ml
	5...50 °C	-	360	350	330	320	

**Example:** The ambient temperature can be maintained in the 22...35 °C range. The gas inlet temperature is 140 °C, the inlet dew point 60 °C.

Use row "inlet dew point" = 60 °C and ambient temperature 22...35 °C to locate the value 2000 L/h in column 140 °C. For values between the gas temperature values in the table, use linear calculation between the flow values.

Dimensions

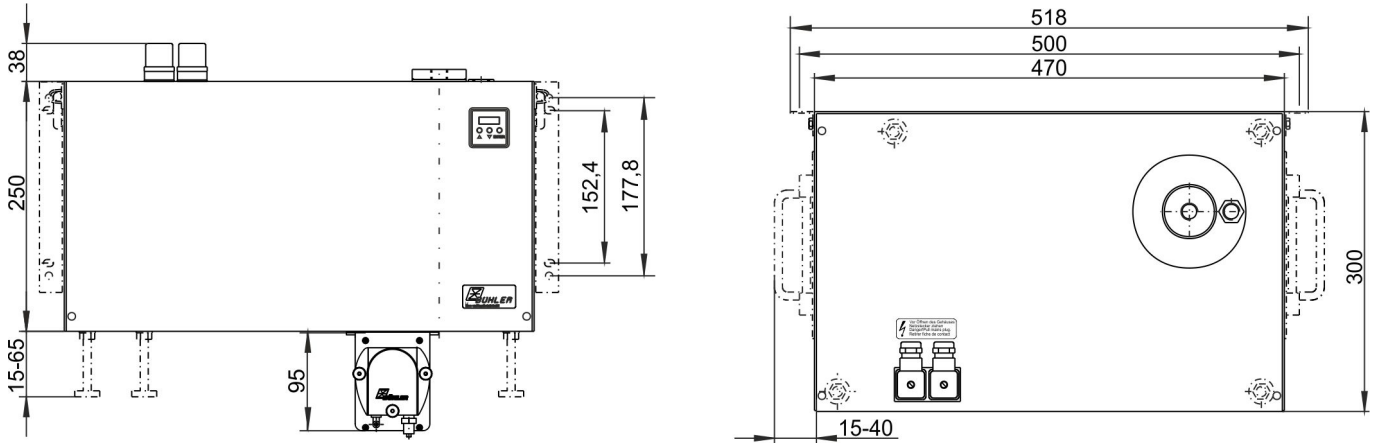

Ordering Instructions

The item number is a code for the configuration of your unit. Please use the following model key:

**Please note:** Every individual gas path must be equipped with peristaltic pump or condensate drain.

4569	X	X	X	X	0	0	0	X	Product Characteristics
									<b>Voltage</b>
1									115 V
2									230 V
									<b>Gas path / Material / Version</b>
0	0	0							without heat exchanger
1	1	0							Single WT/ Stainless Steel/ TS10 G 3/8"
1	1	1							Single WT/ Stainless steel/ TS10 NPT 3/8"
1	2	1							Single WT/ glass coated inside/ TS10 GB NPT 3/8"
									<b>Condensate drain <sup>1)</sup></b>
	0								without condensate drain
									<b>Mounting Accessories</b>
								0	without mounting accessories
								1	with mounting accessories
								2	with feet
								3	with mounting accessories and feet
								4	with handles
								5	with mounting brackets and handles
								6	with feet and handles
								7	with all mounting accessories

<sup>1)</sup> Peristaltic pumps cannot be mounted to the cooler. Peristaltic pumps only available for separate installation.

Spare Parts and Accessories

Item no.	Description
44 10 00 1	Automatic condensate drain 11 LD V 38
44 10 00 4	Automatic condensate drain AK 20, PVDF
44 10 00 5	Condensate trap GL 1; glass, 0.4 L
44 10 01 9	Condensate trap GL 2; glass, 1 L
44 92 11 20 114	CPsingle 115/230 V, 50/60 Hz, 1 L/h, metric screw-in connection DN 4/6, for separate installation
44 92 11 20 115	CPsingle 115/230 V, 50/60 Hz, 1 L/h, US screw-in connection 1/6"-1/4, for separate installation
44 92 00 35 114	Norprene replacement hose with screw connection (metric) for peristaltic pump 1 L/h
44 92 00 35 115	Norprene replacement hose with screw connection (US) for peristaltic pump 1 L/h