



Precise low-frequency reproduction hd Slim265

For small to medium sound reinforcement applications



hd Slim265

Design Subwoofer with precise low-frequency reproduction for small to medium sound reinforcement applications

The hd Slim265 is a passive design subwoofer equipped with two 6" woofers in bass reflex tuning. The ultra-compact dimensions allow decentralized and unobtrusive positioning of subwoofers on ceilings, walls or floors in small to medium-sized sound reinforcement applications such as churches, restaurants or conference rooms.

The hd Slim265 can be installed flexibly and easily with brackets on a wall or ceiling or can be used on the floor using the adjustable feet. Terminal connections on the loudspeaker side ensure a tool-free and quick connection of the loudspeaker. The loudspeaker can be customized

in all RAL-Colors for optimal adaptation to the room architecture. Due to the super flat design of just 102 mm, the hd Slim265 requires operation on Harmonic Design® system amplifiers for precise and unobtrusive low-frequency reproduction. The selectable impedance of 4 or 16 ohms efficiently and budget-friendly uses the existing amplifier resources.



hd Slim265 Datasheet

Features

- operation on hd system amplifier
- 102 mm extremely flat design
- elegant design
- precise low-frequency reproduction
- wall, ceiling or floor mounting
- decentralized placeable for best bass distribution
- extends frequency response for all hd speakers
- RAL-Colors available


Application

Restaurants, bars, airports, train stations, home theater, conference rooms, hotels, A/V installations, multimedia applications, meeting rooms, TV studios, churches

Model	hd Slim265
Order number	40045
Acoustic design	Bass reflex, downfire
Transducers	2x 6" ferrite woofer
Impedance	4 or 16 Ω , specify on order
Crossover	variable according to the preset
Coverage (hor x ver)	omnidirectional
Frequency range (-6 dB)	55 Hz - 200 Hz
Sensitivity (1W / 1m)	98 dB
Power Rating AES / Peak	300 / 600 W
SPLmax @ 10% THD	125 dB
Enclosure	braced multiplex housing with fine Warnex textured paint black, clamp terminal on the loudspeaker side
Optional Accessories	wall bracket set (Art. 900864), leveling feet for floor application (Art. 900867), weatherproof (Art. 40610), RAL-Color (Art. 1073)
Weight	9 kg
Dimensions (W x H x D)	400 x 102 x 584 mm


hd Slim265 Datasheet

Dimensions [mm]

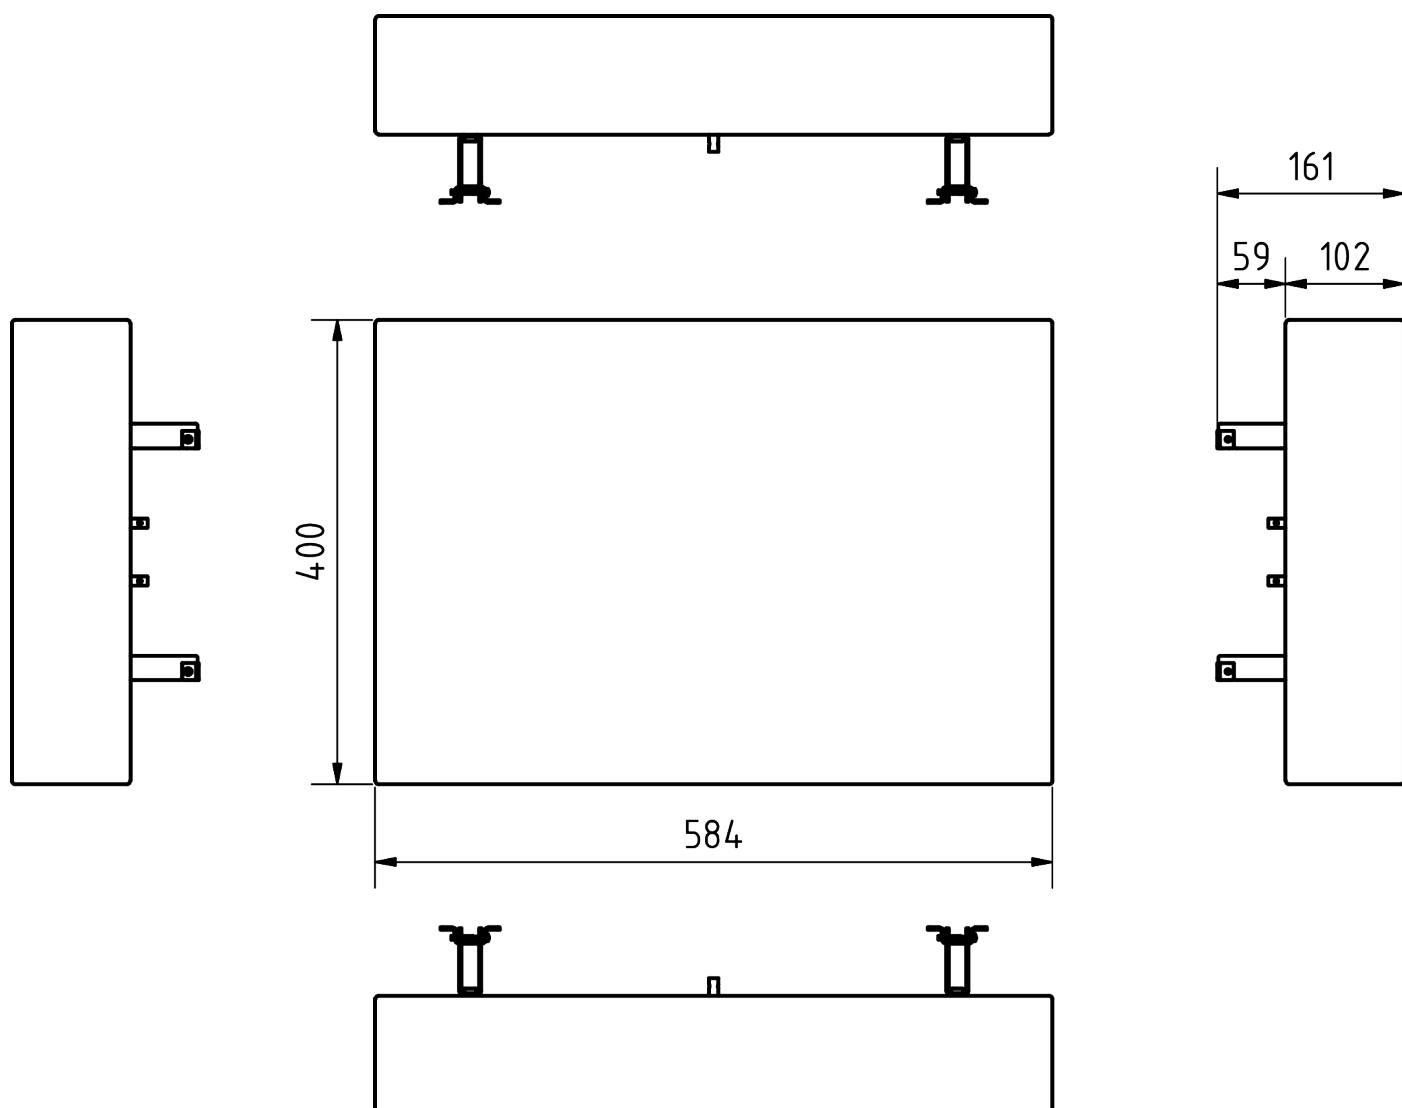


hd Slim265 Datasheet

Impedance

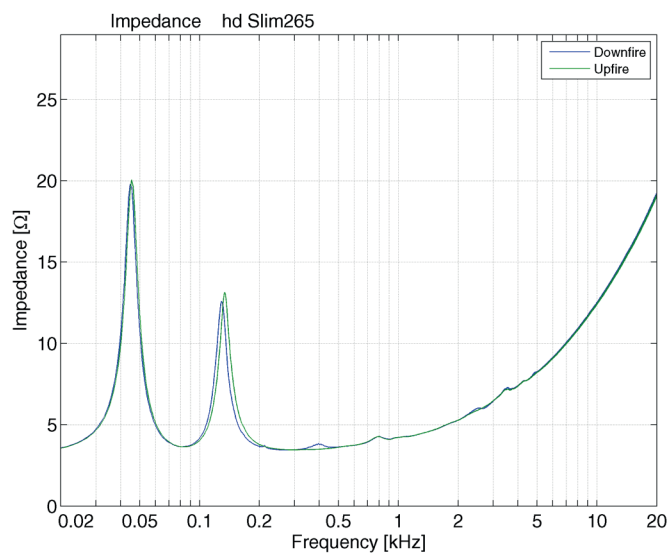

Frequency response with DSP preset

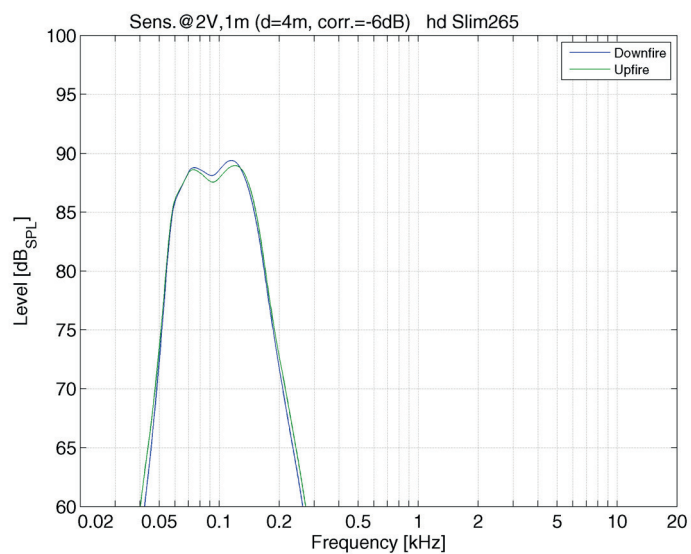

hd Slim265 Datasheet

Accessories



RAL-Color

Special color per article according to RAL-Color chart.

Order number: 1073



Weather resistant

Impregnation against weather influences.


Order number: 40610



Leveling feet for floor application Slim265

Adjustable feet for screwing on for use as a down-fire subwoofer on the floor.

Order number: 900867

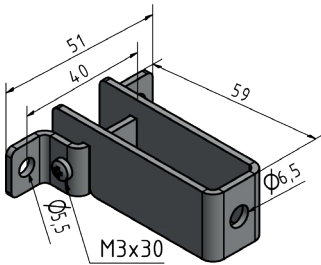

Wall bracket Set Slim265

Wall bracket set for unobtrusive mounting of the subwoofer on the wall or ceiling.

Order number: 900864

Engineered
Made
In Germany



...simply harmonic sound

**Harmonic Design
Audiotechnik GmbH**

Rudolf-Diesel-Straße 11
DE-74382 Neckarwestheim

+ 49 (0) 7133 / 900 8617
info@harmonic-design.com
www.harmonic-design.com