

OCTA OVALL40 CLASSIC I TOOLLESS

THE LIGHT WEIGHT SYSTEM






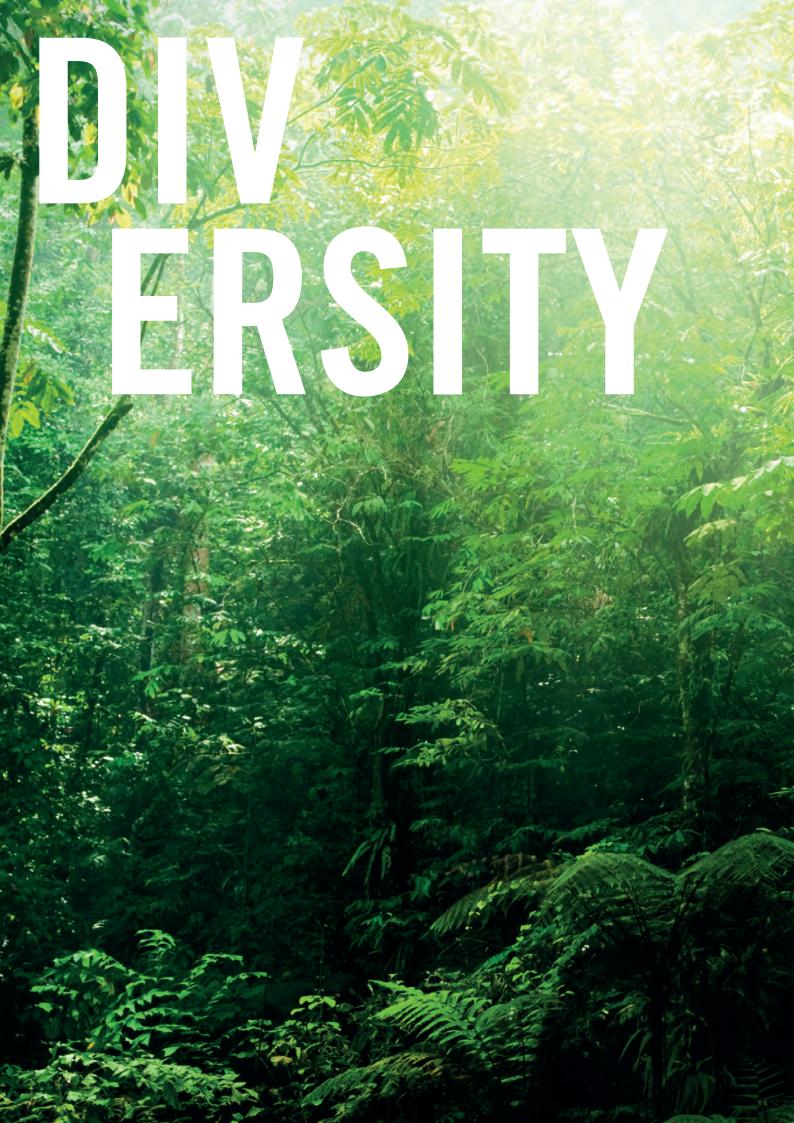

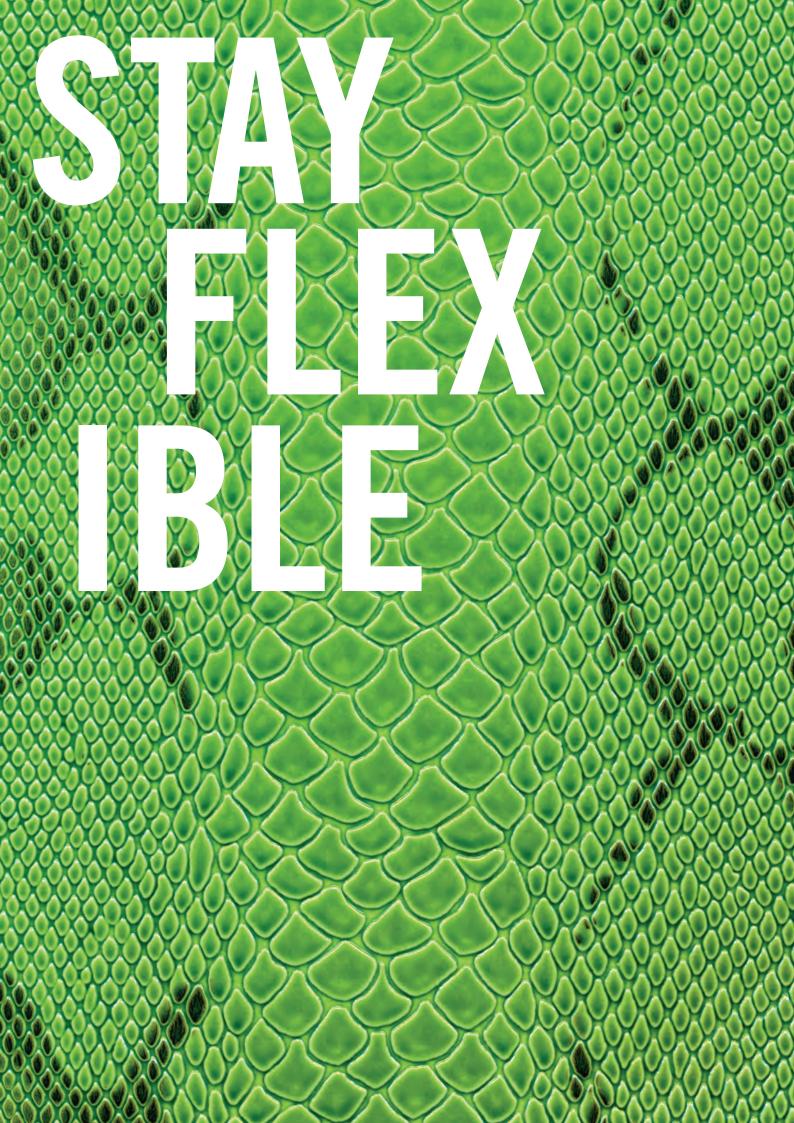


CONTENT

| OCTAWALL 40 | 6 |
|----------------------|----|
| OCTAWALL 40 CLASSIC | 8 |
| Technical features | 10 |
| Components | 12 |
| OCTAWALL 40 TOOLLESS | 16 |
| Technical features | 18 |
| Components | |

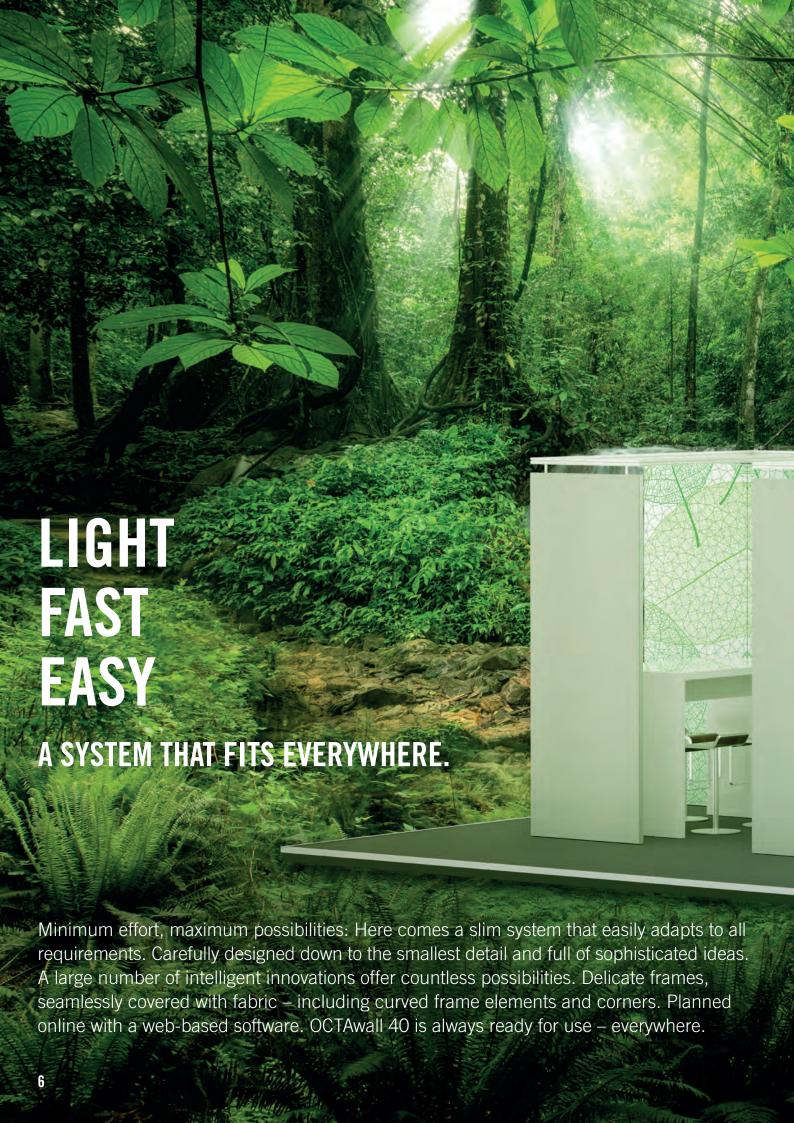



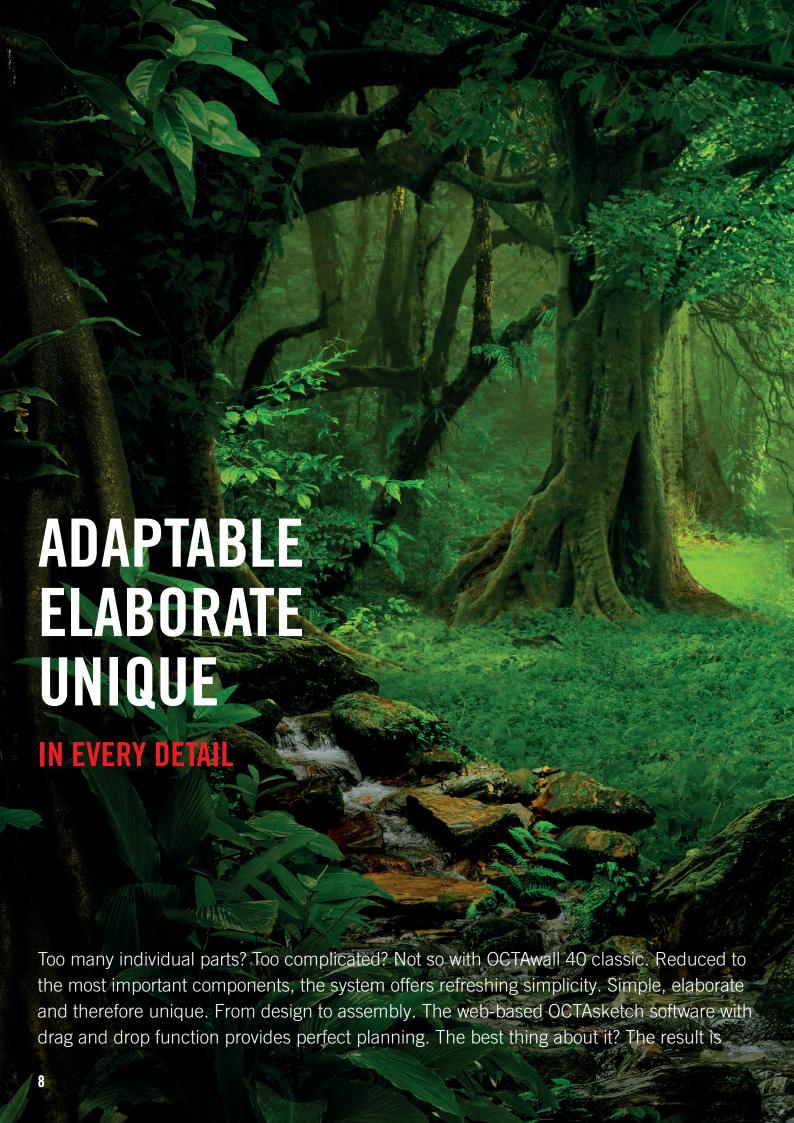





TECHNICAL FEATURES

OCTAwall 40 classic



Lightweight



OCTAsketch planning software



Fabric + panel



Fabric + fabric




Easy corner connection



Curved walls



Magnetic holder



T-connector for ceiling/walls



Silicone edge graphics



Almost seamless fabric corner

Flexible. Without interruption.

Thanks to the new S 382 corner extrusion, there is no visible corner upright. The straight corner and minimalistic design allow for around-the-corner graphics, offering maximum advertisement space.

Curved walls for more freedom.

Curved frames with all-round graphics - totally seamless. This creates maximum advertising space uninterrupted by extrusions. Rooms will appear in a completely new light. Not only from the outside, but also from the inside. OCTAwall classic can be equipped with acoustic fabric. No matter if used as a conference room or a place of retreat – with this system, the choice is yours.

Short-term modifications? No problem.

If you forgot something during the planning phase or have to make changes onsite: The W 466 T-connector allows you to install and shift perpendicular walls without the need of a connection extrusion. This way, your booth can easily be adapted to local conditions despite its system construction. Apart from walls, complete ceiling elements can be installed.

1 beam. 2 magnets. An invisible connection.

Literature racks and shelves can be attached without visible fixtures: magnetically to a beam mounted between uprights behind the fabric. Allowing you to display up to 2 kg at any height – no tools required.

OCTAWALL 40 CLASSIC

Elegant aluminium surface I with system groove I extremely lightweight I for single- or double-sided fabric or fabric/panel I with or without mitres I for silicone edge graphics

OCTAWALL 40 CLASSIC

FRAME, $950 \times 2480 \text{ MM}$



Frame custom size:

W 444/E

Frame custom size:

W 944

W 442/E.01

 $\begin{array}{l} \textbf{Aluminium} \mid 1 \times \text{frame of W 906, for } \underline{\text{double-sided fabric/panel}}, \text{ incl. } 2 \times \text{adjustable foot C 440/F, } 3 \times \text{mounting-set M 1477, internal corner connector W 916 (no mitre needed) and hook tape W 840 } 7.76 \, \text{kg} \, \text{I W 950} \times \text{H 2480 mm} \end{array}$

Drillings for cable management available on request

Without fabric/print II



OCTAWALL 40 CLASSIC

FRAME, $950 \times 2480 \text{ MM}$



W 934.01

Aluminium | 1 \times frame of M 1307, for <u>double-sided</u> <u>fabric</u>, incl. 2 \times adjustable foot C 440/F, 6 \times mounting-set M 1477 and internal corner connector Z 990 (with mitre cut)

6.88~kg l W $950\times\text{H}$ 2480 mm

Drillings for cable management available on request

Without fabric/print 🚺



OCTAWALL 40 CLASSIC

FRAME DIVIDABLE, 950 × 2480 MM




W 932.01

 $\begin{array}{l} \textbf{Aluminium} \mid 1 \times \text{frame of M 1307, for } \underline{\text{double-sided}} \\ \underline{\text{fabric,}} \text{ dividable for transport, incl. } 2 \times \text{adjustable foot} \\ \text{C 440/F, } 4 \times \text{mounting-set M 1477} \text{ and internal corner} \\ \text{connector Z 990 (with mitre cut)} \\ 8.08 \text{ kg I W 950} \times \text{H 2480 mm} \\ \end{array}$

Drillings for cable management available on request

Without fabric/print II



OCTAWALL 40 CLASSIC

FRAME CURVED, 495 × 2480 MM




W 441/E.01

Aluminium I 1 × frame of W 906, for <u>double-sided fabric/panel</u>, incl. 2 × adjustable foot C 440/F, 3 × mountingset M 1477, internal corner connector W 916 (no mitre needed) and hook tape W 840

7.74 kg | W 495 × H 2480 mm

Drillings for cable management available on request

Without fabric/print 💶







OCTAWALL 40 CLASSIC

Elegant aluminium surface | with system groove | extremely light weight | for single- or double-sided fabric or fabric/panel | with or without mitres | for silicone edge graphics

OCTAWALL 40 CLASSIC

CEILING ELEMENT, STACKED $950 \times 2480 \text{ MM}$

For flush mounting of ceiling element: $4 \times \text{T-connector}$ W 466



D 931.01


Aluminium I $1 \times$ ceiling frame of M 1305, for fabric with silicone edge M 1313, incl. $4 \times$ connector for system groove

 $10.17~\mathrm{kg}$ l W $950\times\mathrm{H}$ 2480 mm



OCTAwall 40 classic



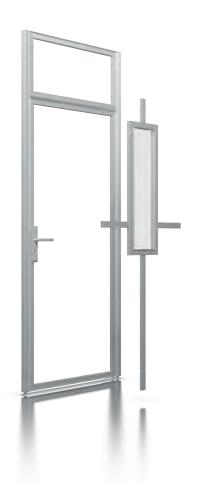



OCTAWALL 40 CLASSIC

DOOR ELEMENT UNIVERSAL




W 415.01

Aluminium I $1 \times$ door element, universal, suitable for DIN left and DIN right, inward and outward opening, consisting of door and door frame (roof light, cladable extrusions and threshold plate), incl. hook tape W 840, without dead lock cylinder W 514

19.50 kg | W 950 × H 2480 mm

Drillings for cable management available on request

Without fabric/print 1



Door custom size: W 415So

OCTAWALL 40 CLASSIC


WINDOW ELEMENT, FOR DOOR ELEMENT W 415



W 414.01

 $\begin{array}{l} \textbf{Aluminium} \mid 1 \times \text{window element, in addition to door} \\ \text{element W 415, width of horizontal beams matches the} \\ \text{width of the door element} \\ \end{array}$

Window size: W 200 \times H 800 mm









TECHNICAL FEATURES

OCTAwall 40 toolless



Lightweight



OCTAsketch planning software



Fabric + panel



Silicone edge graphics



Plugable connection



Shoulder bag

Quick and easy - of course you can have both.

Unpack. Plug together. Done. Thanks to the new spring mechanism, the OCTAwall 40 toolless frame is set up in no time at all. Firmly screwed to the extrusion on one side, the connector snaps in on the other with a *click*. Easy and time saving – a completely toolless installation.

Everything within your grasp thanks to a handy bag.

Many changes of location within a very short time? The shoulder bag accompanies you wherever you go. It holds all extrusions required for one frame, safely rolled up and protected against scratches. No more forgotten parts or transport problems.

Main application: everything.

Fairs, events, POS, or exhibitions: OCTAlumina 40 can be used for all kinds of decorative or presentation purposes – even in combination with OCTAlumina and Maxima 40.

Today fabric - tomorrow panel.

The high quality hook and loop tape prooves itself through the safe and toolless installation of panels. The well-proven system groove and silicone edge system adds tension to your fabric. Together, they offer a modern surface look and utmost flexibility.

OCTAWALL 40 TOOLLESS

Elegant aluminium surface | with system groove | with toolless connection | extremely lightweight | for double-sided fabric/panel | without mitres | for silicone edge graphics

Attention: freestanding only for double-sided fabric

> Frame custom size: W 403M

> > Frame

custom size: W 413M

OCTAWALL 40 TOOLLESS

FRAME, 950 × 2480 MM




W 402M.01

Aluminium | 1 × freestanding frame of W 906, for <u>double-sided fabric</u>, with plugable connection, incl. 2 × rotatable foot plates M 1956 and 1 × bracing, incl. shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496 8.93 kg | W 950 × H 2480 mm

Drillings for cable management available on request

Without fabric/print 🚺



OCTAWALL 40 TOOLLESS

FRAME, $950 \times 2480 \text{ MM}$




W 412M.01

Aluminium I 1 × frame of W 906, for <u>double-sided fabric/panel</u>, with plugable connection, incl. 2 × adjustable foot C 440/F and 1 × bracing, incl. shoulder bag W 494, 4 × corner connector W 916M, 2 × connector OL 240M, 3 × mounting-set M 1496 and hook tape W 840 $8.11 \text{ kg} \mid \text{W} 950 \times \text{H} 2480 \text{ mm}$

Drillings for cable management available on request

Without fabric/print 🚺



OCTALUMINA 40


LIGHT FRAME, 950 × 2480 MM



OL 415.01

Aluminium | 1 \times frame with 40 mm extrusion width, with system groove, aluminium composite panel with LED modules mounted, incl. 2 m cable with plug, with adjustable foot, for single-sided backlit graphics 26.76 kg | W 950 \times H 2480 mm

Without fabric/print 🚺



OCTAWALL 40 TOOLLESS

DOOR ELEMENT UNIVERSAL, DIVIDABLE IN CENTER




W 415M.01

Aluminium | $1 \times$ door element, with pluggable connection, universal, suitable for DIN left and DIN right, inward and outward opening, without dead lock cylinder W 514, optioal: bag W 925, hook tape W 840 20.42 kg | W 950 \times H 2480 mm

Drillings for cable management available on request

Without fabric/print 🔟





EXHIBITION SYSTEMS PROJECT SOLUTIONS PRESENTATION INTERIOR DESIGN CLEANROOM SYSTEMS

