


Cylinder fäste nr 01 = Ledlager

Med ledlager (01) alt. Utvärdig gänga (05) eller invändig gänga (06)

Rör dia.	Kolstång dia.																Tryck area mm ²	Drag area mm ²	
		A	B	C	D	E	F	G	H	I	J	K	L	M	N	NV			S
50/40	25	187	18	45	30	50	112	G 1/4"	50	25	16	20	14	24	M18x1.5	22	10	1256	765
60/50	30	202	18	50	35	55	117	G 3/8"	60	30	20	25	18	32	M20	26	12	1962	1255
60/50	32	202	18	50	35	55	117	G 3/8"	60	30	20	25	18	32	M20	27	12	1962	1158
73/63	32	216	23	55	40	55	121	G 3/8"	70	30	22	30	18	32	M20	27	12	3116	2312
73/63	40	216	23	55	40	55	121	G 3/8"	70	30	22	30	18	36	M24	34	12	3116	1860
80/70	40	221	23	55	40	55	126	G 3/8"	70	30	22	30	18	36	M24	34	12	3846	2590
95/80	40	266	23	70	50	70	146	G 1/2"	90	40	28	35	21	36	M24	34	12	5024	3768
95/80	50	266	23	70	50	70	146	G 1/2"	90	40	28	35	21	45	M33x2	43	15	5024	3061
105/90	50	291	33	75	60	70	156	G 1/2"	100	50	32	40	21	45	M33x2	43	15	6360	4398
115/100	50	315	33	85	70	70	160	G 1/2"	120	50	35	50	21	45	M33x2	43	15	7850	5887
115/100	63	315	33	85	70	70	160	G 1/2"	120	50	35	50	21	56	M42x2	56	20	7850	4734
130/110	60	323	35	90	70	73	163	G 3/4"	120	50	35	50	23	56	M40x2	54	20	9498	6672
130/110	63	323	35	90	70	73	163	G 3/4"	120	50	35	50	23	56	M42x2	56	20	9498	6382
135/120	50	323	33	90	70	73	163	G 3/4"	120	50	35	50	23	45	M33x2	43	15	11304	9341
135/120	60	323	35	90	70	73	163	G 3/4"	120	50	35	50	13	56	M40x2	54	20	11304	8478
145/125	63	344	40	90	80	73	174	G 3/4"	140	60	44	60	23	56	M42x2	56	20	12266	9150
160/140	63	360	40	110	80	73	170	G 3/4"	140	60	44	60	23	56	M42x2	56	20	15386	12270
160/140	80	360	40	110	80	73	170	G 3/4"	140	60	44	60	23	70	M52x2	72	20	15386	10362
180/160	80	425	40	140	100	90	185	G 3/4"	180	60	49	70	23	70	M52x2	72	20	20096	15072
205/180	80	460	45	140	100	90	220	G 3/4"	180	60	49	70	23	70	M52x2	72	20	25434	20410

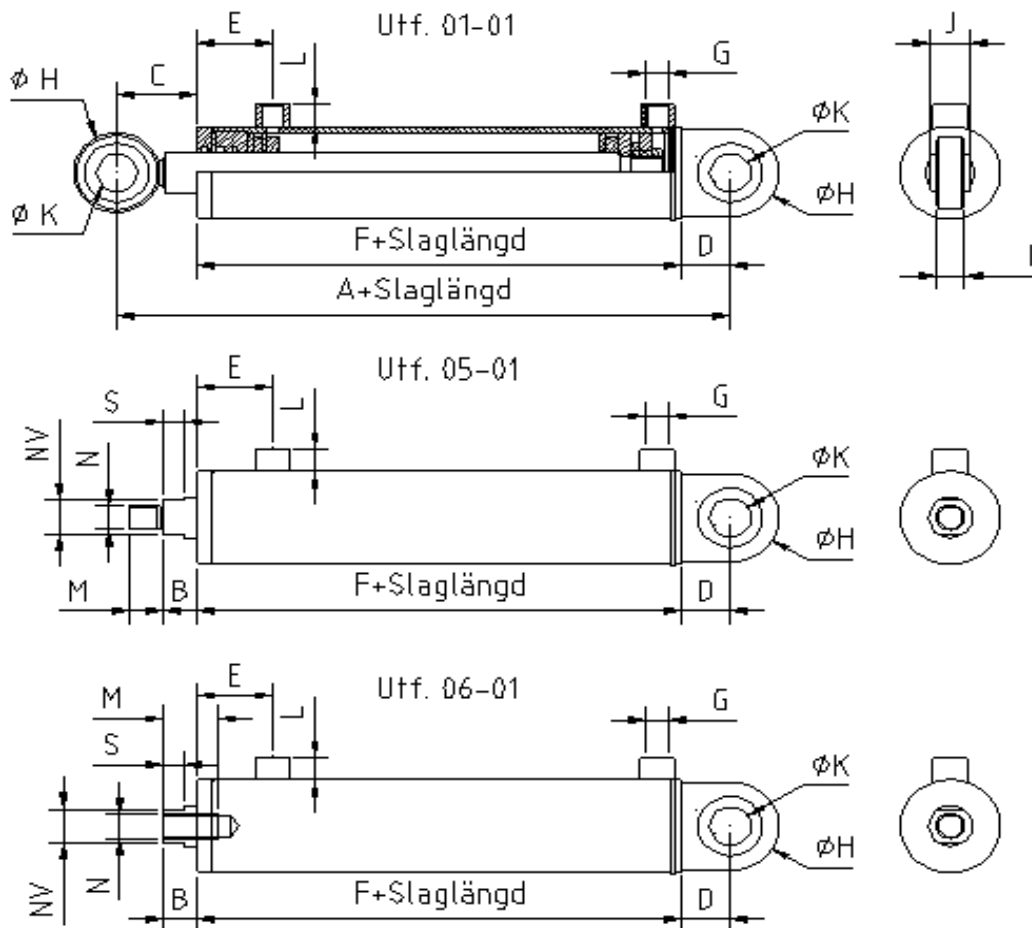

Ledlagerdimensionerna är baserade på GE lager Våra cylindrar provtrycks med 200 bar

Vi förbehåller oss rätten till ändringar www.hydmek.se tel: 0372-30532