



Rapid and Easy set-up in the field

NORLENSE SWIFT TENT SYSTEM



STRENGTH DURABILITY SAFETY

www.icrenltd.com ; www.norlense.com

SWIFT TENT SYSTEM - *High-Pressure Inflatable Tents*

The NorLense SWIFT Tents is a rapid and modular system designed to meet the tough demands of high mobility and comfort in all type of climates. Developed in close cooperation with military and emergency organisation and is in daily use in numerous of operations worldwide.


The SWIFT Tents are a complete One-Piece solution with no loose parts, integrated floor and complete High-Pressure Inflatable Air Beam Structure - working pressure 6-8 bar.

All SWIFT Tents is delivered as a standard with integrated floor, 3-layer windows, attachment/hanging points for lighting and cable distribution, connections for HVAC Systems.

High-Pressure inflatable structure contributes to rapid and easy set-up/take down for the users in the field and decreasing the risk of operations errors with missing or broken parts.

HIGH MODULARITY & FLEXIBILITY

The SWIFT Tent Units can be interconnected in a various of configurations to create a complete infrastructure. Allows for connections in all directions of the tent (end & long side), container & vehicle connections.

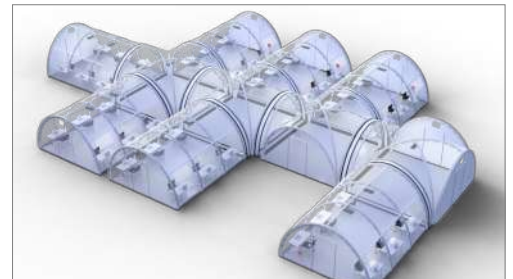

EXTREME VERSATILITY

The SWIFT Tents are made of waterproof, fire & UV resistance material that can operate in temperatures from -45°C to +70C. The High-Pressure structure is not affected by temperature changes and can handle heavy wind and snow load.



KEY FEATURES

- Rapid Deployment & Easy operation
- Minimum number of mancraft
- Deployment on any surface
- One-piece solution (no loose parts)
- 100% Mobile
- Modular & Multifunctional
- No need for constant air supply
(compressor/air-source disconnected when tent is inflated)
- Low weight & low transport volume
- For all weather climates and hash conditions



SWIFT TENT SYSTEM - *High-Pressure Inflatable Tents*

Tent Model	Area	Width	Lenght	Height	Weight*
SWIFT 3X2.5	7.5 sqm	3 m	2.5 m	2.1 m	46 kg
SWIFT 4X4	16 sqm	4 m	4 m	2.4 m	70 kg
SWIFT 5X4	20 sqm	5 m	4 m	2.5 m	95 kg
SWIFT 5X6	30 sqm		6 m	2.5 m	135 kg
SWIFT 5X8	40 sqm		8 m	2.5 m	180 kg
SWIFT 5x10	50 sqm		10 m	2.5 m	214 kg
SWIFT 6X6	36 sqm	6 m	6 m	3 m	170 kg
SWIFT 6X8	48 sqm		8 m	3 m	228 kg
SWIFT 6x10	60 sqm		10 m	3 m	285 kg
SWIFT 5x5 Connector Tent	25 sqm	5 m	5 m	2.5 m	145 kg
SWIFT 6x6 Connector Tent	36 sqm	6 m	6 m	3 m	165 kg
Tent mateial and floor fabric:	Double sided PVC Coated Polyester fabric , Waterproof, UV-Resistant and Fire retardant Weight of fabric: 535g/m ² to 800g/m ² Optional: IR & Blockout membrance. Standard Tent colors: White, Nato Green, Sand/Tan. <i>Other tent colors upon request.</i>				
Standrad Configuration:	Removable gable-walls**, Integrated PVC-Flooring, 3-layer windows, attachment/hanging points for lighting and cable distribution, ventilation openings and HVAC ducts. Optional: Number of doors, windows & HVAC ducts				
Accessories included:	Stakes, Hammer, Guy Ropes, Field Repair Kit, Pressure Gauge, User Manual and Heavy Duty Transport/Storage bag.				
Optional accessories:	<ul style="list-style-type: none"> • Inner-liner • Flysheet • Ground sheet • Flooring isolation • Integrated cable distribution • Hard door • Compressor 				

*Approx. Tent weight. +/- depending of weight of fabric and configuration of tent.

** Removable gable-walls not available for SWIFT 3X2.5 & SWIFT 4X4



NorLense

SHELTER SOLUTIONS

www.icrenltd.com ; www.norlense.com

info@icrenltd.com ; shelter@norlense.com ; +4776118180 ; +234906 379 7004

Products developed and produced in E.U

Quality certificate ISO 9001:2015 and environmental certificate ISO 14001:2015.

© NorLense AS, Fiskebøl, 8317 Strønstad, Norway