





Exiom Solution diseña, fabrica y distribuye la más alta calidad en Energía Solar. La alta eficiencia de nuestras células solares nos permite producir diferentes tipos de paneles para a su vez dar la mayor eficiencia posible a sus instalaciones.

*Exiom Solution designs, manufactures and delivers high-performance solar electric technology worldwide. Our high-efficiency solar cell let us manufacture the different kinds of panels to get the most efficient in your installations.*

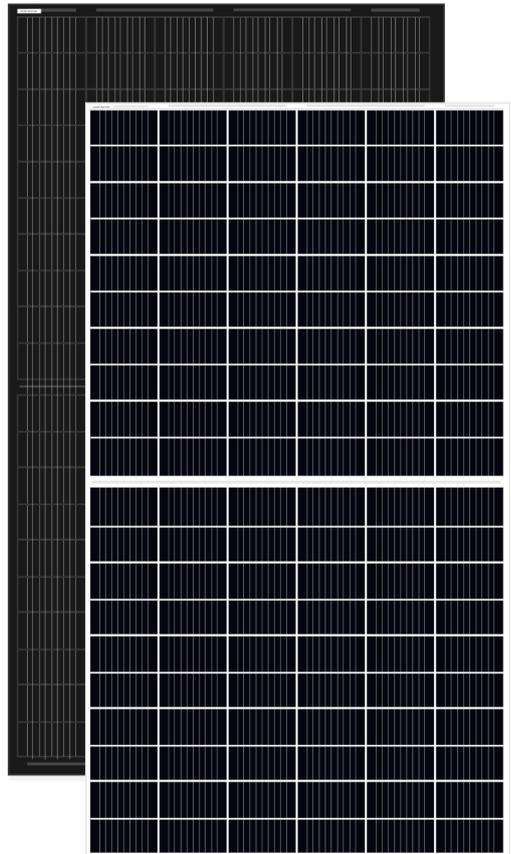

**GARANTÍA DE RENDIMIENTO LINEAL  
LINEAR PERFORMANCE WARRANTY**

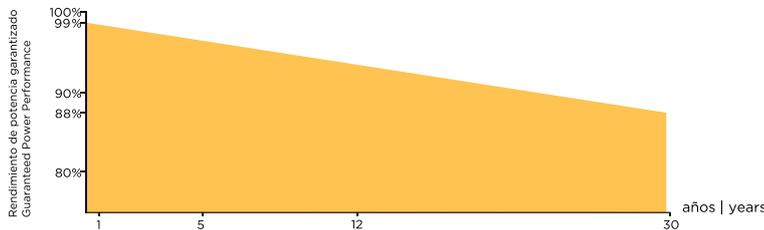

**22.0 %**  
**Extreme Power Production**  
The module efficiency up to 22.0% achieved by utilizing the most advanced technology in the solar industry.



**High Energy Yield**  
Excellent weak light performance and better performance in hot climate. Leading temperature coefficient for more production when the sun shines strongest, Or under the cloudy, haze condition.



**SuperMBB Half-Cut Cell Technology**  
Using the advanced 9BB solar cell combines with half-cut cell technology to guarantee more power.

5,400  
2,400  
Pascal

**Guaranteed Better Durability**  
Certified for snow and wind loads of a maximum of 5,400 / 2,400 Pascals and with better protection against harsh weather to improve cell life for long-lasting high power.



**Advanced Bifacial Efficiency**  
Bifaciality > 80%, effectively improves backside power generation. A bifacial cell design that generates energy from both sides, capturing and converting more sunlight into power even with a backsheet.



**Industry Leading Output Warranty**  
HTJ technology result in extremely low LID and PID which supports reliability and longevity. 12% power degradation in 30 years.

## ELECTRICAL CHARACTERISTICS (STC\*)

Maximum power - Pmax (W)	380	385	390	395	400
Open circuit current - Voc (V)	44.22	44.35	44.48	44.61	44.74
Short circuit current - Isc (A)	10.50	10.56	10.62	10.68	10.74
Voltage at maximum power - VMP (V)	37.52	37.70	37.91	38.16	38.36
Current at maximum power point - IMP (A)	10.14	10.22	10.30	10.36	10.43
Module efficiency (%)	20.9	21.1	21.4	21.7	22.0
Operating Module Temperature	-40 to +85°C				
Maximum System Voltage	DC1500V (IEC)				
Maximum Series Fuse	20A				
Rating Power Sorting	0-+5W				
Bifaciality (%)	80±5				

## BSTC\*\*

Maximum power - Pmax (W)	420	425	430	435	440
Open circuit current - Voc (V)	45.34	45.61	45.94	46.81	47.51
Short circuit current - Isc (A)	11.49	11.53	11.57	11.61	11.65
Voltage at maximum power - VMP (V)	38.31	38.50	38.67	38.93	39.20
Current at maximum power point - IMP (A)	11.09	11.13	11.18	11.23	11.28


\*STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25°C, AM=1.5; Best in Class AAA solar simulator used, power measurement uncertainty is within +/- 3%.

\*\*BSTC: Front side irradiation 1000W/m<sup>2</sup>, back side reflection irradiation 135W/m<sup>2</sup>, spectrum AM1.5, ambient temperature 25°C. Values are based on RETC certified results from a light-soaked module.

## MECHANICAL PARAMETERS

Laminate Structure	Glass/ POE/ Cells/ POE/Glass
Cell Type	HJT Mono 166 x 83 mm
Cell Connection	120 (60x2)
Module Dimensions	1755x1038 mm
Weight	23.5 kg
Junction Box	Degree of protection IP67/IP68
Output Cable	4mm <sup>2</sup> , 200mm in length, length can be customized
Connectors Type	UV Resistant Cable/Compatible MC4
Frame	Anodised Aluminum Alloy
Encapsulant	POE
Front Load	5400 Pa
Real Load	2400 Pa
Glass Thickness	(F) 2.0mm Anti-reflective surface Solar glass   (B) 2.0mm Solar glass

## DRAWINGS

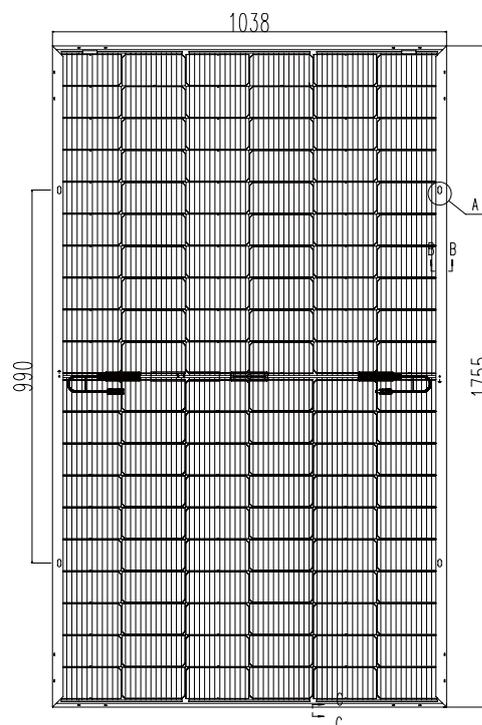

## TEMPERATURE PARAMETERS

Nominal Operating Cell Temp. (NOCT)	44°C (±2°C)
Temperature Coefficient of Pmax	-0.26 %/°C
Temperature Coefficient of Voc	-0.24 %/°C
Temperature Coefficient of Isc	0.04 %/°C

## PRODUCT CERTIFICATION

CERTIFIED  
**IEC**  
61730 Ed.1

CERTIFIED  
**IEC**  
61215 Ed.2



**Anti-PID**  
System voltage durability  
PPP 56042

