JETTING
DARE TO DO IT DIFFERENTLY.

V2 FIBER BLOWING MACHINE

Compact, lightweight, and built for demanding fiber installations. Weighing only 24 lb, the Jetting V2 is easy to transport, quick to set up, and simple to operate in the field. Despite its compact size, it delivers an impressive 124 lbf of pushing force and installation speeds of up to 656 ft/min, making it ideal for both everyday jobs and demanding installations. The unique joystick controller provides precise forward and reverse control for maximum operator confidence. The machine can be configured for cables from 0.09 to 0.63 in and ducts from 0.28 to 1.97 in. Its rugged anodized aluminum construction ensures long service life while keeping the machine lightweight and easy to maintain.

FIBER BLOWING MACHINE FOR CABLE 0.09–0.63 IN / DUCT 0.28–1.97 IN

- Pneumatic operation with dual motors.
- Electronic display showing speed, distance, duct pressure and machine status.
- Max. speed 656 ft/min.
- Max. cable pushing force 124 lbf.
- 17.7" belt drive for gentle cable handling with adjustable clamping force.
- Integrated CEJN compressed air outlet for connecting accessories.
- Joystick control with forward and reverse operation.
- Fast duct depressurization with integrated Air Release Valve.
- Quick-release belt drive and quick-release belt guard for fast service.
- Water separator with automatic drain.
- Ergonomic aluminum handle.
- Up to 50 hours of operation on three AA batteries.
- WiFi for software updates.
- Compatible with JetLogger.

TECHNICAL DATA

Min / Max Pressure:
145–232 psi

Pushing Force:
Up to 124 lbf

Cable Diameter:
0.09–0.63 in

Duct Diameter:
0.28–1.97 in

Weight:
Approx. 24 lb

Air Connection:
¾" Claw connector

WxHxD:
16.5 × 9.1 × 17.7 in

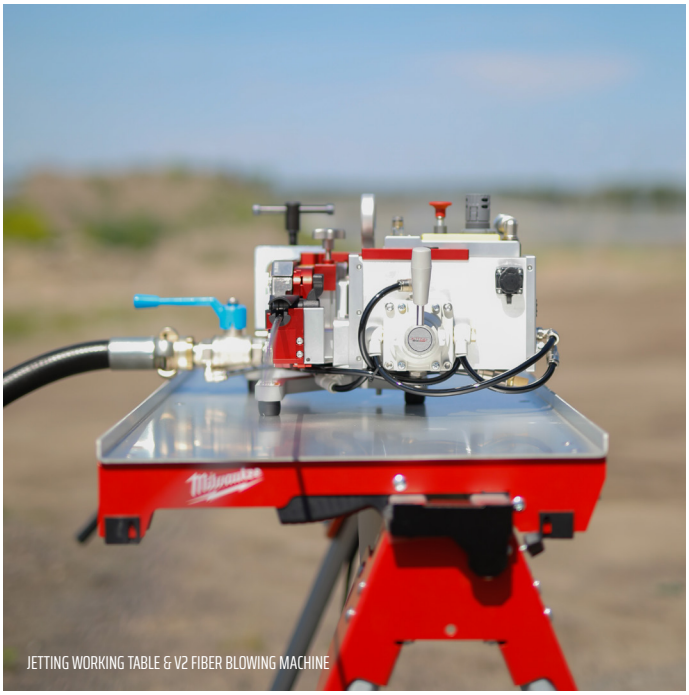

JETTING WORKING TABLE & V2 FIBER BLOWING MACHINE

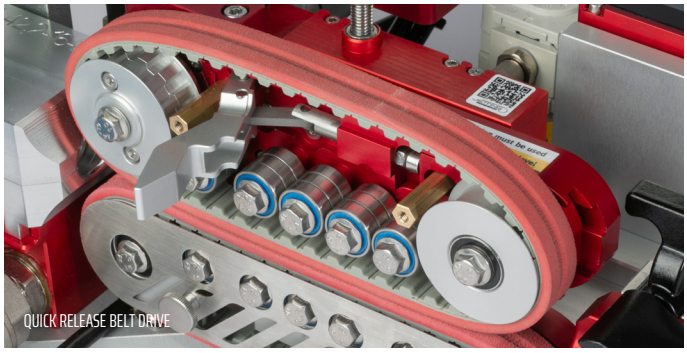

QUICK RELEASE BELT DRIVE

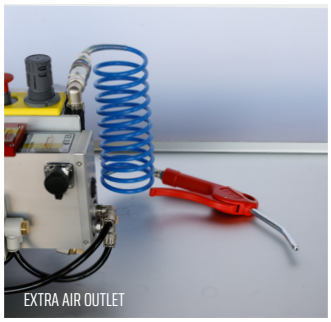

EXTRA AIR OUTLET

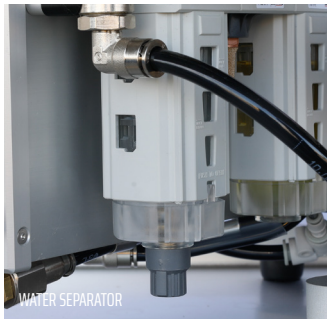

WATER SEPARATOR



V2 DUCT CLAMPS (AVAILABLE IN DIFFERENT SIZES)

AFTERBLOWER

V2 CABLE GUIDES (AVAILABLE IN DIFFERENT SIZES)

V2 TRANSPORT CASE WITH FOAM INSERT

FLOATING KIT

V2 FIXTURE

LUBE AND PNEUMATIC OIL

HANDLE FOR EASY AND SMART TRANSPORTATION

STD CONFIGURATION V2

- V2 Transport Case with foam insert
- V2 fixture
- 1 bottle Micro Duct Lube
- 1 bottle Duct Lube
- 1 bottle pneumatic oil
- Service kit

ACCESSORIES FOR V2

- Working Table
- Afterblower
- Floating kit
- Jetlogger
- Duct clamps
- Cable guides
- Jetdrum
- Air Blowing Gun

JETTING GUIDELINE FOR COMPRESSOR CAPACITY

DUCT/PIPE	AIR FLOW	AIR PRESSURE
Up to Ø 8 mm (Up to 0.31 in)	17.7 CFM	145–232 psi
Ø 8–10 mm (0.31–0.39 in)	21.2 CFM	145–232 psi
Ø 12–16 mm (0.47–0.63 in)	35.3 CFM	145–232 psi
Ø 17–20 mm (0.67–0.79 in)	70.6 CFM	145–232 psi
Ø 32 mm (1.26 in)	247 CFM	145–232 psi
Ø 40 mm (1.57 in)	318 CFM	145–232 psi
Ø 50 mm (1.97 in)	353 CFM	145–232 psi