



Watch Video

JWL Inflating gun

Easy and precise tyre inflating.


JWL inflating gun with a ø63mm manometer, clamping nipple and a 0,5 m hose.

The tyre pressure reduces over time. Around every fifth car is driving with an incorrect tyre pressure in one or more tyres*¹. A wrong tyre pressure effects the fuel consumption, the safety and the wear.

JWL inflating gun pumps all kinds of tyres, easily and precisely. The volume of air is infinitely adjustable and easily regulated using the trigger and the drain plug. We use the compressed air in the gun to ease the activating of the handle. JWL inflating gun is functional and reliable.

JWL inflating gun has a quality manometer(0-12 bar) in class 1,6 according to the standard EN 837-1. The exactness of the manometer is 0-12 bar: ±0,19 bar. The scale is in bar and psi.

The precision is tested on all JWL inflating guns during production.

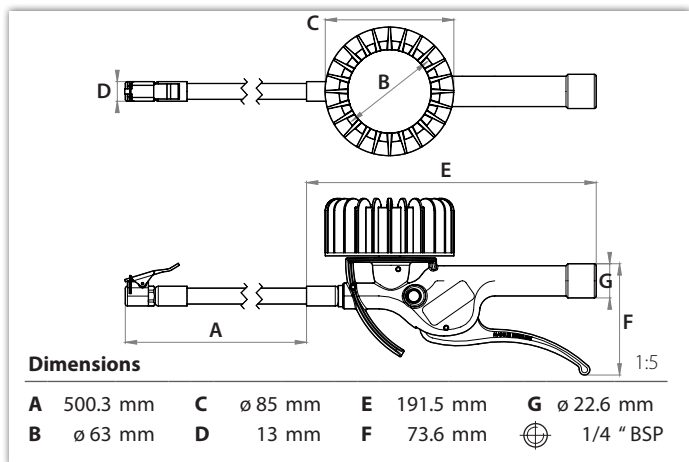

*1 Danish Transport Agency, 25.02.2011



Materials		Specifications		Accessories		Code no.	
Handle and trigger	Acetal plastic	P	Max 16 bar	0,5 m Hose with clamping nipple		150805	
Valve	Acetal plastic			1 m Hose with clamping nipple		150817	
Gaskets / O-rings	Nitrile			0,5 m Hose with twin connector		150807	
Hose	NBR/PVC, Polyester		-20°C to +60°C	Rubber protection ø63mm		150220	
Spring	Hardened spring wire		0.34 kg	Gauge ø63, Class 1.6, EN 837-1 8 (0-12 bar)		150225	