



## ACPT

### Medium-wall heat shrink tubing with mastic coating

**Features:**

- Medium-wall tubing with mastic • Excellent corrosion protection properties
- Excellent bonding to both metal and wood • UV resistant

**Approvals:**


- Meets: RoHS

**Application:**

- Operating temperature: -35 °C to +110 °C • Minimum full recovery temperature: +120 °C
- Longitudinal change: 0 ± 10% max.

**Order information:**

- Also available in lengths of 1 and 1,5 meter
- Color: black
- On request also available with 25% extra mastic

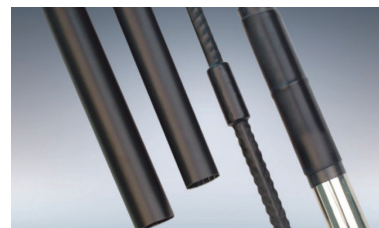

Provides effective mechanical protection and mastic layer prevent against water, fuels and moisture.

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Standard length in mm
ACPT 33/8	33,0	8,0	2,5	1220
ACPT 40/12	40,0	12,0	2,5	1220
ACPT 55/16	55,0	16,0	2,7	1220
ACPT 65/19	65,0	19,0	2,9	1220
ACPT 75/22	75,0	22,0	3,0	1220
ACPT 85/25	85,0	25,0	3,0	1220
ACPT 95/25	95,0	25,0	3,0	1220
ACPT 115/34	115,0	34,0	3,2	1220
ACPT 140/42	140,0	42,0	3,3	1220
ACPT 160/50	160,0	50,0	3,3	1220
ACPT 180/58	180,0	58,0	3,3	1220
ACPT 200/65	200,0	65,0	3,3	1220
ACPT 235/65	235,0	65,0	3,7	1220
ACPT 265/75	265,0	75,0	3,8	1220
ACPT 300/85	300,0	85,0	3,8	1220
ACPT 350/100	350,0	100,0	4,2	1220
ACPT 410/150	410,0	150,0	4,2	1000

For cross references, please see pages 4-5

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.