



ACS-50

Thin-wall heat shrink tubing / non flame retardant / 2:1

Features:

- Crosslinked Polyolefin
- Shrink ratio: 2:1
- 100% transparent
- Bright shiny-black

Approvals:


Meets: RoHS

Application:

- Operating temperature: -55 °C to +105 °C
- Minimum shrink temperature: +70 °C
- Minimum full recovery temperature: +95 °C
- Longitudinal change: 0 ± 10% max.

Order information:

- Colors: shiny-black / transparent
- Also available in various lengths and in mini boxes

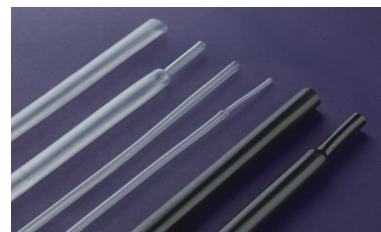

For Halogen free polyolefin.
It produces neither toxic smoke nor harmful substances.

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Reel / Meter
ACS-50 1,2/0,6	1,2	0,6	0,33	150
ACS-50 1,6/0,8	1,6	0,8	0,36	150
ACS-50 2,4/1,2	2,4	1,2	0,44	150
ACS-50 3,2/1,6	3,2	1,6	0,44	150
ACS-50 4,8/2,4	4,8	2,4	0,51	75
ACS-50 6,4/3,2	6,4	3,2	0,56	75
ACS-50 9,5/4,8	9,5	4,8	0,56	75
ACS-50 12,7/6,4	12,7	6,4	0,65	50
ACS-50 16,0/8,0	16,0	8,0	0,69	50
ACS-50 19,0/9,5	19,0	9,5	0,80	30
ACS-50 25,4/12,7	25,4	12,7	0,90	30
ACS-50 32,0/16,0	32,0	16,0	0,90	30
ACS-50 38,1/19,0	38,1	19,0	1,00	30
ACS-50 50,8/25,4	50,8	25,4	1,00	30
ACS-50 76,2/38,1	76,2	38,1	1,20	15

Other sizes on request

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.