

Flexible flame retardant, high shrink ratio



AHW/AHWA

Heavy-wall heat shrink tubing / with and without hot melt adhesive

Features:

- Heavy-wall tubing with and without hot melt adhesive
- Superior electrical and environmental insulation
- Excellent abrasion and impact resistance
- Ideal for low voltage applications
- UV resistant

Approvals:


- Meets: RoHS

Application:

- Operating temperature: -55 °C to +110 °C
- Minimum full recovery temperature: +120 °C
- Longitudinal change: 0 ± 10% max.

Order information:

- Also available in lengths of 1 and 1,5 meter
- Color: black

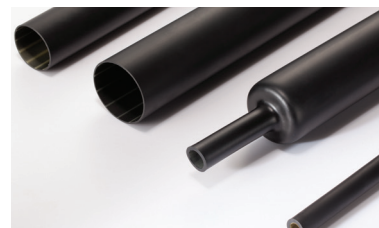

Recommended for applications on light cables and wire harnesses which require waterproofing, protection of connector components. Halogen and Cadmium free.

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Standard length in mm
AHW/AHWA 9/3	9,0	3,0	1,8	1220
AHW/AHWA 13/4	13,0	4,0	2,2	1220
AHW/AHWA 22/6	22,0	6,0	2,7	1220
AHW/AHWA 33/8	33,0	8,0	3,2	1220
AHW/AHWA 40/12	40,0	12,0	4,0	1220
AHW/AHWA 45/12	45,0	12,0	4,0	1220
AHW/AHWA 55/16	55,0	16,0	4,0	1220
AHW/AHWA 65/19	65,0	19,0	4,0	1220
AHW/AHWA 75/22	75,0	22,0	4,0	1220
AHW/AHWA 85/25	85,0	25,0	4,2	1220
AHW/AHWA 95/30	95,0	30,0	4,2	1220
AHW/AHWA 105/30	105,0	30,0	4,2	1220
AHW/AHWA 115/34	115,0	34,0	4,2	1220
AHW/AHWA 130/36	130,0	36,0	4,2	1220
AHW/AHWA 160/50	160,0	50,0	4,2	1220
AHW/AHWA 180/50	180,0	50,0	4,2	1220
AHW/AHWA 200/60	200,0	60,0	4,2	1220
AHW/AHWA 235/65	235,0	65,0	4,1	1220
AHW/AHWA 265/75	265,0	75,0	4,3	1220
AHW/AHWA 300/85	300,0	85,0	4,4	1220
AHW/AHWA 350/100	350,0	100,0	4,5	1220

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.

For cross references, please see pages 4-5