




## ALST

Thin-wall heat shrink tubing / flexible / flame retardant / 2:1 / low shrink temperature

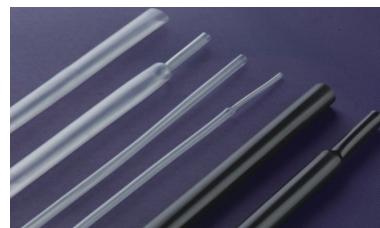

### Features:

- Crosslinked Polyolefin • Shrink ratio: 2:1 • Low shrink temperature

### Approvals:

- Flame propagation FMVSS 302 • Meets: RoHS

### Application:

- Operating temperature: -55 °C to +125 °C • Minimum shrink temperature: +65 °C
- Minimum full recovery temperature: +95 °C • Longitudinal change: 0 ± 10% max.

### Order information:

- Color: black

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Reel / Meter
ALST 1,6/0,8	1,6	0,8	0,5	150
ALST 2,4/1,2	2,4	1,2	0,5	150
ALST 3,2/1,6	3,2	1,6	0,5	150
ALST 4,8/2,4	4,8	2,4	0,5	75
ALST 6,4/3,2	6,4	3,2	0,6	75
ALST 9,5/4,8	9,5	4,8	0,6	75
ALST 12,7/6,4	12,7	6,4	0,6	50
ALST 16,0/8,0	16,0	8,0	0,6	50
ALST 19,0/9,5	19,0	9,5	0,8	30
ALST 25,4/12,7	25,4	12,7	0,9	30
ALST 32,0/16,0	32,0	16,0	0,9	30
ALST 38,1/19,0	38,1	19,0	1,0	30
ALST 50,8/25,4	50,8	25,4	1,1	30

For cross references, please see pages 4-5

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.