




# CABLE TIES / STAINLESS STEEL

MLG

## STAINLESS STEEL

Material : Stainless steel AISI 304 or AISI 316L  
 Color : Steel  
 Temperature range : -80 °C up to +538 °C  
 Certification : UL

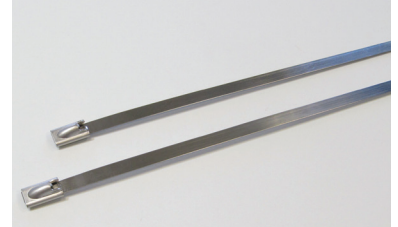

Typenr.	Length (mm)	Width (mm)	Max. bundle diameter (mm)	Tensile strength (kg)	Packing (pcs)
ST.STEEL 125x4,6mm	125	4,6	38,0	90	100
ST.STEEL 200x4,6mm	200	4,6	61,9	90	100
ST.STEEL 300x4,6mm	300	4,6	90,6	90	100
ST.STEEL 360x4,6mm	360	4,6	112,8	90	100
ST.STEEL 520x4,6mm	520	4,6	163,8	90	100
ST.STEEL 680x4,6mm	680	4,6	214,8	90	100
ST.STEEL 840x4,6mm	840	4,6	265,7	90	100
ST.STEEL 200x7,9mm	200	7,9	61,9	160	100
ST.STEEL 300x7,9mm	300	7,9	90,6	160	100
ST.STEEL 360x7,9mm	360	7,9	112,8	160	100
ST.STEEL 450x7,9mm	450	7,9	141,0	160	100
ST.STEEL 520x7,9mm	520	7,9	163,8	160	100
ST.STEEL 680x7,9mm	680	7,9	214,8	160	100
ST.STEEL 840x7,9mm	840	7,9	265,7	160	100
ST.STEEL 1020x7,9mm	1020	7,9	320,0	160	100

*We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.*