



MEDIUM WALL TUBING / HMWA

Medium wall tubing



HMWA

Medium-wall heat shrink tubing / with hot melt adhesive (co-extrusion)

Features:

- Medium-wall tubing with hot melt adhesive
- Co-extrusion technology
- Good electrical and mechanical performance
- Ideal for low voltage applications
- UV resistant

Approvals:


- Meets: RoHS

Application:

- Operating temperature: -55 °C to +110 °C
- Minimum full recovery temperature: +120 °C
- Longitudinal change: 0 ± 10% max.

Order information:

- Also available in lengths of 1 and 1,5 meter
- Color: black

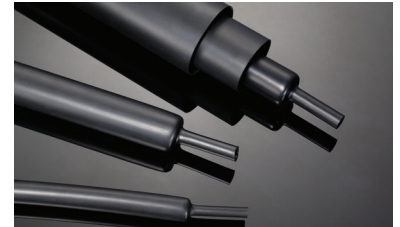

Recommended to applications for light cable and wire harnesses that require waterproofing, protection, and sealing of connectors components within the tubing.

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Standard length in mm
HMWA 8/2	8,0	2,0	1,4	1220
HMWA 12/3	12,0	3,0	1,4	1220
HMWA 16/5	16,0	5,0	1,5	1220
HMWA 22/6	22,0	6,0	2,0	1220
HMWA 33/8	33,0	8,0	2,0	1220
HMWA 40/12	40,0	12,0	2,0	1220
HMWA 55/16	55,0	16,0	2,0	1220
HMWA 65/19	65,0	19,0	2,5	1220
HMWA 75/22	75,0	22,0	2,7	1220
HMWA 85/25	85,0	25,0	2,8	1220
HMWA 95/25	95,0	25,0	2,8	1220
HMWA 115/34	115,0	34,0	3,4	1220
HMWA 140/42	140,0	42,0	3,4	1220
HMWA 160/50	160,0	50,0	3,4	1220

For cross references, please see pages 4-5

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.