



AWAS

Heavy-wall heat shrink tubing / heat shrinkable cable repair sleeve with glue

Features:

- Heat shrinkable wrap around sleeve • Good environmental protection
- Good electrical and mechanical performance • Ideal for low voltage applications
- UV and weather resistant

Approvals:


- Meets: RoHS

Application:

- Operating temperature: -40 °C to +110 °C • Longitudinal change: 0 ± 10% max.

Order information:

- Color: black

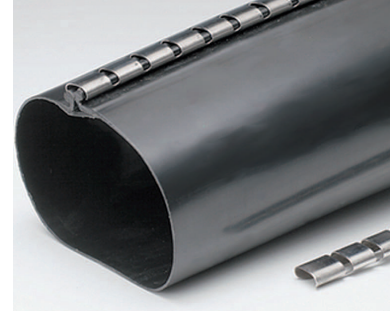

The sleeves are lined with hot-melt adhesive to ensure protection against moisture or water penetration.

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Standard lengths in mm
AWAS 36/10	36,0	10,0	3,2	500, 750, 1000, 1500
AWAS 55/13	55,0	13,0	3,4	500, 750, 1000, 1500
AWAS 85/22	85,0	22,0	3,6	500, 750, 1000, 1500
AWAS 108/27	108,0	27,0	4,7	500, 750, 1000, 1500
AWAS 136/30	136,0	30,0	4,7	500, 750, 1000, 1500
AWAS 180/50	180,0	50,0	4,7	500, 750, 1000, 1500

Other wrap around sleeves are also available on special request

- AWAS-S: fiber glass reinforcing layer with aluminum moisture vapour barrier layer.
- AWAS-G: Thermochromic Paint.
- AWAS-M: Mastic Inner Layer.

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.