
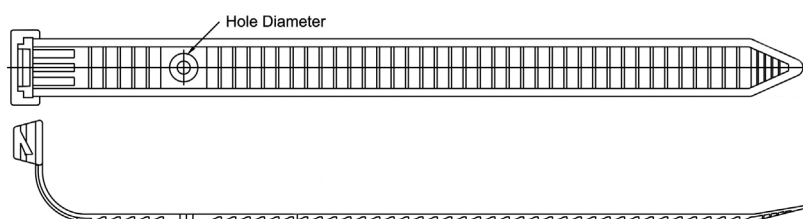


# CABLE TIES

## AIRCONDITION - MOUNTABLE

### AIRCONDITION

|                   |                                      |
|-------------------|--------------------------------------|
| Material          | : Polyamide 6.6                      |
| Color             | : Transparent / black (UV resistant) |
| Temperature range | : -40 °C up to +85 °C                |
| Flammability      | : UL 94 V2                           |
| Certification     | : UL, Lloyd's                        |

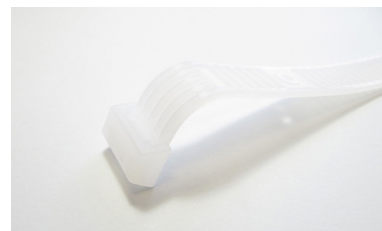

| Typenr.        | Length (mm) | Width (mm) | Max. bundle diameter (mm) | Tensile strength (kg) | Thickness (mm) | Hole diameter (mm) | Packing (pcs) |
|----------------|-------------|------------|---------------------------|-----------------------|----------------|--------------------|---------------|
| AIRCO 235x20mm | 235         | 20         | 73                        | 20                    | 2,4            | Ø 4,5              | 10            |
| AIRCO 275x20mm | 275         | 20         | 85                        | 20                    | 2,4            | Ø 4,5              | 10            |

### MOUNTABLE

|                   |                                      |
|-------------------|--------------------------------------|
| Material          | : Polyamide 6.6                      |
| Color             | : Transparent / black (UV resistant) |
| Temperature range | : -40 °C up to +85 °C                |
| Flammability      | : UL 94 V2                           |
| Certification     | : UL, Lloyd's                        |



| Typenr.             | Length (mm) | Width (mm) | Max. bundle diameter (mm) | Tensile strength (kg) | Hole (mm) | Packing (pcs) |
|---------------------|-------------|------------|---------------------------|-----------------------|-----------|---------------|
| MOUNTABLE 110x2,5mm | 110         | 2,5        | 22                        | 8,1                   | Ø 3,2     | 100           |
| MOUNTABLE 150x3,6mm | 150         | 3,6        | 32                        | 18,2                  | Ø 4,2     | 100           |
| MOUNTABLE 200x4,8mm | 200         | 4,8        | 50                        | 22,2                  | Ø 5,5     | 100           |
| MOUNTABLE 200x7,6mm | 200         | 7,6        | 50                        | 54,4                  | Ø 5,7     | 100           |
| MOUNTABLE 313x7,6mm | 313         | 7,6        | 76                        | 54,4                  | Ø 5,7     | 100           |
| MOUNTABLE 382x7,6mm | 382         | 7,6        | 98                        | 54,4                  | Ø 6,3     | 100           |

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.