

TERMINALS


Non insulated terminals

Material : Copper
 Plating : Electro tin plated
 Insulation : None
 Operation temp : -55 - 150°C



With inspection hole
 RoHS compliant

On request: 185 mm², 240 mm² and 300 mm²

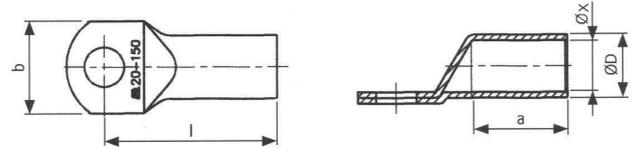

Typenr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	a (mm)	l (mm)	b (mm)	Packing (pcs)
AKK 60.05	6,0	10	5,0	3,6	5,6	9,0	21,0	11,5	100
AKK 60.06	6,0	10	6,0	3,6	5,6	9,0	21,0	11,5	100
AKK 60.08	6,0	10	8,0	3,6	5,6	9,0	23,0	13,0	100
AKK 60.10	6,0	10	10,0	3,6	5,6	9,0	25,0	16,0	100
AKK 100.05	10,0	8	5,0	4,5	7,0	10,0	21,0	12,0	100
AKK 100.06	10,0	8	6,0	4,5	7,0	10,0	21,5	12,0	100
AKK 100.08	10,0	8	8,0	4,5	7,0	10,0	23,5	15,0	100
AKK 100.10	10,0	8	10,0	4,5	7,0	10,0	25,5	17,0	100
AKK 160.05	16,0	6	5,0	5,5	8,5	13,0	25,0	12,0	100
AKK 160.06	16,0	6	6,0	5,5	8,5	13,0	25,5	12,0	100
AKK 160.08	16,0	6	8,0	5,5	8,5	13,0	27,5	15,0	100
AKK 160.10	16,0	6	10,0	5,5	8,5	13,0	29,5	17,0	100
AKK 160.12	16,0	6	12,0	5,5	8,5	13,0	30,5	19,0	100
AKK 250.05	25,0	4	5,0	7,2	10,0	15,0	28,0	14,0	100
AKK 250.06	25,0	4	6,0	7,2	10,0	15,0	28,5	14,0	100
AKK 250.08	25,0	4	8,0	7,2	10,0	15,0	30,5	16,0	100
AKK 250.10	25,0	4	10,0	7,2	10,0	15,0	32,5	18,0	100
AKK 250.12	25,0	4	12,0	7,2	10,0	15,0	33,5	19,0	100
AKK 350.06	35,0	2	6,0	8,5	12,0	17,0	31,5	18,0	100
AKK 350.08	35,0	2	8,0	8,5	12,0	17,0	33,5	18,0	100
AKK 350.10	35,0	2	10,0	8,5	12,0	17,0	35,5	18,0	100
AKK 350.12	35,0	2	12,0	8,5	12,0	17,0	36,5	20,0	100

For other types, please see the following page

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.

Typnr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	a (mm)	l (mm)	b (mm)	Packing (pcs)
AKK 500.06	50,0	1/0	6,0	10,2	14,0	19,0	34,5	20,0	100
AKK 500.08	50,0	1/0	8,0	10,2	14,0	19,0	36,5	20,0	100
AKK 500.10	50,0	1/0	10,0	10,2	14,0	19,0	38,5	20,0	100
AKK 500.12	50,0	1/0	12,0	10,2	14,0	19,0	39,5	23,0	100
AKK 500.16	50,0	1/0	16,0	10,2	14,0	19,0	42,5	28,0	100
AKK 700.06	70,0	2/0	6,0	12,0	16,5	21,0	40,5	23,0	50
AKK 700.08	70,0	2/0	8,0	12,0	16,5	21,0	40,5	23,0	50
AKK 700.10	70,0	2/0	10,0	12,0	16,5	21,0	43,5	23,0	50
AKK 700.12	70,0	2/0	12,0	12,0	16,5	21,0	43,5	23,0	50
AKK 700.14	70,0	2/0	14,0	12,0	16,5	21,0	46,5	28,0	50
AKK 700.16	70,0	2/0	16,0	12,0	16,5	21,0	46,5	28,0	50
AKK 950.08	95,0	3/0	8,0	13,5	17,8	24,0	47,0	25,0	50
AKK 950.10	95,0	3/0	10,0	13,5	17,8	24,0	47,0	25,0	50
AKK 950.12	95,0	3/0	12,0	13,5	17,8	24,0	47,0	25,0	50
AKK 950.14	95,0	3/0	14,0	13,5	17,8	24,0	50,0	25,0	50
AKK 950.16	95,0	3/0	16,0	13,5	17,8	24,0	50,0	29,0	50
AKK 1200.08	120,0	4/0	8,0	15,0	19,5	26,0	50,0	29,0	30
AKK 1200.10	120,0	4/0	10,0	15,0	19,5	26,0	50,0	29,0	30
AKK 1200.12	120,0	4/0	12,0	15,0	19,5	26,0	50,0	29,0	30
AKK 1200.14	120,0	4/0	14,0	15,0	19,5	26,0	53,0	29,0	30
AKK 1200.16	120,0	4/0	16,0	15,0	19,5	26,0	53,0	29,0	30
AKK 1200.20	120,0	4/0	20,0	15,0	19,5	26,0	57,5	35,0	30
AKK 1500.10	150,0	5/0	10,0	16,5	20,8	29,0	54,0	31,0	10
AKK 1500.12	150,0	5/0	12,0	16,5	20,8	29,0	54,0	31,0	10
AKK 1500.16	150,0	5/0	16,0	16,5	20,8	29,0	57,0	31,0	10
AKK 1500.20	150,0	5/0	20,0	16,5	20,8	29,0	61,5	35,0	10

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.