


## BRAIDED SLEEVING


Material : Polyester PET HB  
 Temperature range : -50 °C up to +150 °C  
 Melting temperature : +250 °C  
 Color : Black

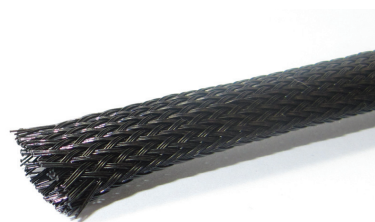

Typenr.	Bundle diameter (mm)	Packing (mtr)
Braided sleeving PG 3 mm	3,00 - 7,00	100
Braided sleeving PG 4 mm	4,00 - 10,00	100
Braided sleeving PG 5 mm	5,00 - 10,00	100
Braided sleeving PG 8 mm	8,00 - 11,00	100
Braided sleeving PG 10 mm	10,00 - 15,00	100
Braided sleeving PG 12 mm	12,00 - 19,00	50
Braided sleeving PG 15 mm	15,00 - 27,00	50
Braided sleeving PG 20 mm	20,00 - 28,00	50
Braided sleeving PG 25 mm	25,00 - 34,00	50
Braided sleeving PG 30 mm	30,00 - 37,00	50
Braided sleeving PG 40 mm	40,00 - 45,00	50
Braided sleeving PG 50 mm	50,00 - 65,00	50

## WRAPPING BANDS

Material : Polyethylene  
 Temperature range : -50 °C up to +85 °C  
 Colors : Black and natural

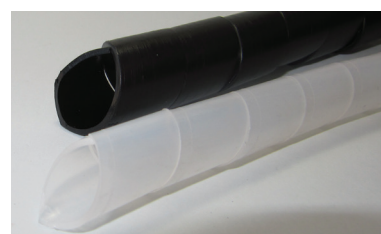

Typenr.	Inside diameter (mm)	Outside diameter (mm)	W (mm)	Bundle diameter (mm)	Packing (mtr)
GST-4	5,0	6,0	7,0	4,0 - 50,0	10,0
GST-6	7,0	8,0	10,8	6,0 - 60,0	10,0
GST-8	8,5	10,0	11,4	7,5 - 60,0	10,0
GST-9	10,2	12,0	13,9	9,0 - 65,0	10,0
GST-12	13,0	15,0	15,0	12,0 - 70,0	10,0
GST-15	16,4	19,0	18,2	15,0 - 100,0	10,0
GST-20	21,0	24,0	19,6	20,0 - 130,0	10,0

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.