


TERMINALS

Non insulated terminals

Material : Copper

On request: 185 mm², 240 mm² and 300 mm²

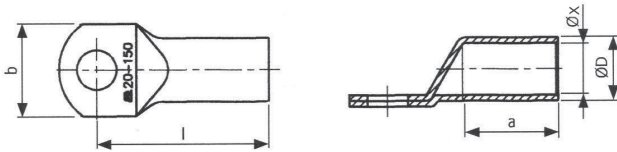

Typenr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	a (mm)	l (mm)	b (mm)	Packing (pcs)
PKK 60.05	6,0	10	5,0	3,6	5,6	9,0	21,0	11,5	100
PKK 60.06	6,0	10	6,0	3,6	5,6	9,0	21,0	11,5	100
PKK 60.08	6,0	10	8,0	3,6	5,6	9,0	23,0	13,0	100
PKK 60.10	6,0	10	10,0	3,6	5,6	9,0	25,0	16,0	100
PKK 100.05	10,0	8	5,0	4,5	7,0	10,0	21,0	12,0	100
PKK 100.06	10,0	8	6,0	4,5	7,0	10,0	21,5	12,0	100
PKK 100.08	10,0	8	8,0	4,5	7,0	10,0	23,5	15,0	100
PKK 100.10	10,0	8	10,0	4,5	7,0	10,0	25,5	17,0	100
PKK 160.05	16,0	6	5,0	5,5	8,5	13,0	25,0	12,0	100
PKK 160.06	16,0	6	6,0	5,5	8,5	13,0	25,5	12,0	100
PKK 160.08	16,0	6	8,0	5,5	8,5	13,0	27,5	15,0	100
PKK 160.10	16,0	6	10,0	5,5	8,5	13,0	29,5	17,0	100
PKK 160.12	16,0	6	12,0	5,5	8,5	13,0	30,5	19,0	100
PKK 250.05	25,0	4	5,0	7,2	10,0	15,0	28,0	14,0	100
PKK 250.06	25,0	4	6,0	7,2	10,0	15,0	28,5	14,0	100
PKK 250.08	25,0	4	8,0	7,2	10,0	15,0	30,5	16,0	100
PKK 250.10	25,0	4	10,0	7,2	10,0	15,0	32,5	18,0	100
PKK 250.12	25,0	4	12,0	7,2	10,0	15,0	33,5	19,0	100
PKK 350.06	35,0	2	6,0	8,5	12,0	17,0	31,5	18,0	100
PKK 350.08	35,0	2	8,0	8,5	12,0	17,0	33,5	18,0	100
PKK 350.10	35,0	2	10,0	8,5	12,0	17,0	35,5	18,0	100
PKK 350.12	35,0	2	12,0	8,5	12,0	17,0	36,5	20,0	100

For other types, please see the following page

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.

Typnr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	a (mm)	l (mm)	b (mm)	Packing (pcs)
PKK 500.06	50,0	1/0	6,0	10,2	14,0	19,0	34,5	20,0	100
PKK 500.08	50,0	1/0	8,0	10,2	14,0	19,0	36,5	20,0	100
PKK 500.10	50,0	1/0	10,0	10,2	14,0	19,0	38,5	20,0	100
PKK 500.12	50,0	1/0	12,0	10,2	14,0	19,0	39,5	23,0	100
PKK 500.16	50,0	1/0	16,0	10,2	14,0	19,0	42,5	28,0	100
PKK 700.06	70,0	2/0	6,0	12,0	16,5	21,0	40,5	23,0	50
PKK 700.08	70,0	2/0	8,0	12,0	16,5	21,0	40,5	23,0	50
PKK 700.10	70,0	2/0	10,0	12,0	16,5	21,0	43,5	23,0	50
PKK 700.12	70,0	2/0	12,0	12,0	16,5	21,0	43,5	23,0	50
PKK 700.14	70,0	2/0	14,0	12,0	16,5	21,0	46,5	28,0	50
PKK 700.16	70,0	2/0	16,0	12,0	16,5	21,0	46,5	28,0	50
PKK 950.08	95,0	3/0	8,0	13,5	17,8	24,0	47,0	25,0	50
PKK 950.10	95,0	3/0	10,0	13,5	17,8	24,0	47,0	25,0	50
PKK 950.12	95,0	3/0	12,0	13,5	17,8	24,0	47,0	25,0	50
PKK 950.14	95,0	3/0	14,0	13,5	17,8	24,0	50,0	25,0	50
PKK 950.16	95,0	3/0	16,0	13,5	17,8	24,0	50,0	29,0	50
PKK 1200.08	120,0	4/0	8,0	15,0	19,5	26,0	50,0	29,0	30
PKK 1200.10	120,0	4/0	10,0	15,0	19,5	26,0	50,0	29,0	30
PKK 1200.12	120,0	4/0	12,0	15,0	19,5	26,0	50,0	29,0	30
PKK 1200.14	120,0	4/0	14,0	15,0	19,5	26,0	53,0	29,0	30
PKK 1200.16	120,0	4/0	16,0	15,0	19,5	26,0	53,0	29,0	30
PKK 1200.20	120,0	4/0	20,0	15,0	19,5	26,0	57,5	35,0	30
PKK 1500.10	150,0	5/0	10,0	16,5	20,8	29,0	54,0	31,0	10
PKK 1500.12	150,0	5/0	12,0	16,5	20,8	29,0	54,0	31,0	10
PKK 1500.16	150,0	5/0	16,0	16,5	20,8	29,0	57,0	31,0	10
PKK 1500.20	150,0	5/0	20,0	16,5	20,8	29,0	61,5	35,0	10

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.