


ASSORTMENT HEAT SHRINK TUBING IN DISPLAY

KACAB offers a practical metal display which contains a wide range of thin- and dual-wall heat shrink tubing. The heat shrink tubing has a standard length of 1220 mm, is packed per type / size in a display box and can easily be taken out to be sold per piece or in small quantities. All bars will be delivered in black. Other colors can be delivered on request.

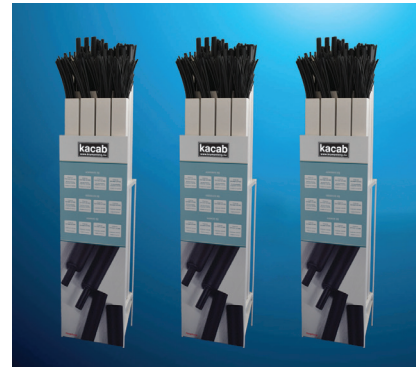

SPECIFICATIONS TYPES OF HEAT SHRINK TUBING

ACS-55:

Thin-wall heat shrink tubing / flexible / flame retardant / 2:1

Features:

- Crosslinked Polyolefin
- Shrink ratio: 2:1
- Flame retardant
- General purpose
- High flexibility

Application:

- Operating temperature: -55 °C to +125 °C
- Minimum shrink temperature: +70 °C
- Minimum full recovery temperature: +100 °C
- Longitudinal change: 0 ± 10% max.

Order information:

- Color: black
- Other colors are available on request: red, blue, yellow, green, white
- In lengths of 1220 mm

ADW-300:

Dual-wall heat shrink tubing / flexible / flame retardant / 3:1 / adhesive lined

Features:

- Crosslinked co-extruded adhesive lined Polyolefin
- Shrink ratio: 3:1
- Flame retardant
- Excellent sealing and insulation properties
- UV-resistant

Application:

- Operating temperature: -55 °C to +125 °C
- Minimum shrink temperature: +70 °C
- Minimum full recovery temperature: +110 °C
- Longitudinal change: 0 ± 10% max.

Order information:

- Color: black
- In lengths of 1220 mm

CONTENT DISPLAY

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Number of pieces in display
ACS-55 - 2,4/1,2	2,4	1,2	0,44	50
ACS-55 - 3,2/1,6	3,2	1,6	0,44	50
ACS-55 - 4,8/2,4	4,8	2,4	0,51	25
ACS-55 - 6,4/3,2	6,4	3,2	0,56	25
ACS-55 - 9,5/4,8	9,5	4,8	0,56	10
ACS-55 - 12,7/6,4	12,7	6,4	0,65	10
ADW-300 - 3,0/1,0	3,0	1,0	1,00	50
ADW-300 - 4,8/1,5	4,8	1,5	1,00	25
ADW-300 - 6,0/2,0	6,0	2,0	1,00	25
ADW-300 - 9,0/3,0	9,0	3,0	1,40	10
ADW-300 - 12,0/4,0	12,0	4,0	1,60	10
ADW-300 - 19,0/6,0	19,0	6,0	2,15	5

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.