

## NONSLIP HEAT SHRINK TUBING

### Nonslip Proof Heat Shrink tubing

This flexible Nonslip heat shrink tube are made from Polyolefin, and with a Nonslip proof figured surface, and can be used for various fishing tackles, sport fittings, and equipment and commodities with hand device.

Basically all places that need to be non-slip can also use this very nice heat shrink tube, with the special surface.

#### Features:

Operating Temperature: -55-105°C

Shrink Temperature: Started at 70°C, full recovery at 110°C

RoHS Compliant ;


Good flexibility, abrasion resistant and anti-Nonslip performance

Standard Color: Black, Red, Yellow, White, Green, Blue

Shrink Ratio: 1.8:1

Standard length are 1,2 meter

\*Other length, dimension and color upon request\*

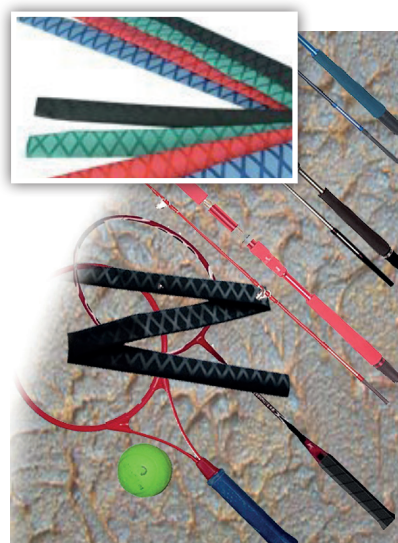

#### TECHNICAL DATA

Property	Test Method	Typical Data
Tensile Strength (Mpa)	ASTM D412	10.4 Mpa
Longitudinal Elongation (%)	ASTM D412	≤8
Elongation (%)	ISO 1210	200%

#### DIMENSIONS

Size mm. (D)	As Supplied (mm)		After Recovery (mm)		Standard length m/pcs
	Inside Diameter Min. (D)	Wall Thickness Nominal. (T)	Inside Diameter Max. (d)	Wall Thickness nominal. (t)	
15	≥15	0.45±0.15	8	0.85±0.15	1,2m
20	≥20	0.50±0.15	11	0.90±0.15	1,2m
22	≥22	0.50±0.15	12.5	0.90±0.15	1,2m
25	≥25	0.50±0.15	14.5	1.00±0.15	1,2m
28	≥28	0.50±0.15	15.5	1.00±0.15	1,2m
30	≥30	0.60±0.15	17.5	1.20±0.15	1,2m
35	≥35	0.60±0.15	20	1.20±0.15	1,2m
40	≥40	0.60±0.15	23	1.20±0.15	1,2m
45	≥45	0.65±0.15	25	1.25±0.15	1,2m
50	≥50	0.65±0.15	28	1.25±0.15	1,2m



Spools as standards. 1 m. or 1,22 m. sticks, special spool lengths or cut pieces available on request.

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.