


## POLYAMIDE PA6 GF30 JACOB REDUCTIONS, METRIC

Material	Polyamide PA6 GF30
External thread	Metric (EN 60423)
Internal thread	Metric (EN 60423)
Temperature range	-30 °C up to +100 °C
Protection grade	Dependent on the combination with other components
Standard colors	Light grey (RAL 7035), black (RAL 9005)

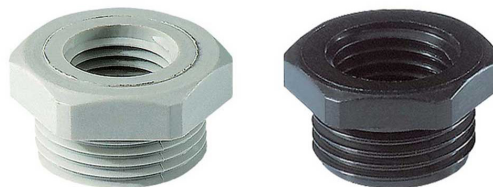

Typenr.	Connecting thread from - to	Thread length (mm)	Height (mm)	Packing (pcs)
M16-M12 PA6 GF30 reduction	M16 x 1,5 - M12 x 1,5	8,0	12,0	100
M20-M12 PA6 GF30 reduction	M20 x 1,5 - M12 x 1,5	8,0	12,0	100
M20-M16 PA6 GF30 reduction	M20 x 1,5 - M16 x 1,5	8,0	12,0	100
M25-M12 PA6 GF30 reduction	M25 x 1,5 - M12 x 1,5	8,0	14,0	100
M25-M16 PA6 GF30 reduction	M25 x 1,5 - M16 x 1,5	8,0	14,0	100
M25-M20 PA6 GF30 reduction	M25 x 1,5 - M20 x 1,5	8,0	14,0	100
M32-M12 PA6 GF30 reduction	M32 x 1,5 - M12 x 1,5	10,0	16,0	50
M32-M16 PA6 GF30 reduction	M32 x 1,5 - M16 x 1,5	10,0	16,0	50
M32-M20 PA6 GF30 reduction	M32 x 1,5 - M20 x 1,5	10,0	16,0	50
M32-M25 PA6 GF30 reduction	M32 x 1,5 - M25 x 1,5	10,0	16,0	50
M40-M16 PA6 GF30 reduction	M40 x 1,5 - M16 x 1,5	10,0	16,0	50
M40-M20 PA6 GF30 reduction	M40 x 1,5 - M20 x 1,5	10,0	16,0	50
M40-M25 PA6 GF30 reduction	M40 x 1,5 - M25 x 1,5	10,0	16,0	50
M40-M32 PA6 GF30 reduction	M40 x 1,5 - M32 x 1,5	10,0	16,0	50
M50-M20 PA6 GF30 reduction	M50 x 1,5 - M20 x 1,5	12,0	18,0	25
M50-M25 PA6 GF30 reduction	M50 x 1,5 - M25 x 1,5	12,0	18,0	25
M50-M32 PA6 GF30 reduction	M50 x 1,5 - M32 x 1,5	12,0	18,0	25
M50-M40 PA6 GF30 reduction	M50 x 1,5 - M40 x 1,5	12,0	18,0	25
M63-M25 PA6 GF30 reduction	M63 x 1,5 - M25 x 1,5	12,0	18,0	25
M63-M32 PA6 GF30 reduction	M63 x 1,5 - M32 x 1,5	12,0	18,0	25
M63-M40 PA6 GF30 reduction	M63 x 1,5 - M40 x 1,5	12,0	18,0	25
M63-M50 PA6 GF30 reduction	M63 x 1,5 - M50 x 1,5	12,0	18,0	25

In addition to our standard range of cable glands and accessories, we can also supply all other Jacob products (on request).  
For this, we refer you to the website of Jacob GmbH: [www.jacob-gmbh.de/en/](http://www.jacob-gmbh.de/en/)