


RAIL-LESS WRAPAROUND CABLE JOINTING - HEATSHRINK REPAIR SOLUTIONS

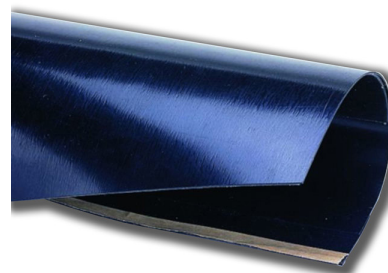

DESCRIPTION:

Heatshrink wraparound sleeves are manufactured from cross-linked polyolefin. The hot melt adhesive inner lining, which melts during shrinking, solidifies to form a permanent seal. This rail-less design provides simple installation with clamshell design. The high shrink ratio covers irregular shapes.

SPECIFICATION:

Material:	Cross-Linked Polyolefin
Operating temperature:	-55°C to +110°C
Colour options:	Black
Tensile strength:	19 MPa
Shrink temperature:	120°C
Elongation:	600%
Dielectric strength:	28kV/mm Min.
Heat shock:	4 Hours at 225°C. No cracking or flowing
Chemical resistance:	Good resistance to hydraulic fluid, lubricating oil, and diesel fuel.

PART NUMBERS:

PART NO.	MIN. ID SUPPLIED (MM)	MAX. ID RECOVERED (MM)	RECOVERED WALL THICKNESS (mm)	LENGTH (mm)	PACK QTY
ARLS-1-914	30	6	2.0	914	1
ARLS-2-914	46	14	2.0	914	1
ARLS-3-914	68	24	2.0	914	1
ARLS-4-914	91	33	2.0	914	1
ARLS-5-914	126	47	2.0	914	1
ARLS-6-914	171	67	2.0	914	1

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.