

## INSULATED TERMINALS



**RoHS**  
COMPLIANT


### Features

- Heat resistant
- Cold resistant
- Exceptional insulation performance

### Insulation


- Vinyl (PVC 75°C)
- Nylon (PA 105°C)
- Polycarbonate (PC 150°C)

### Standard Execution

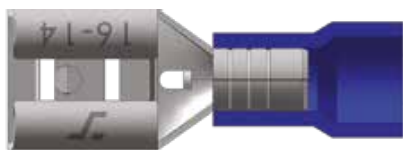


### Copper Sleeve

- Straight copper sleeve tin plated

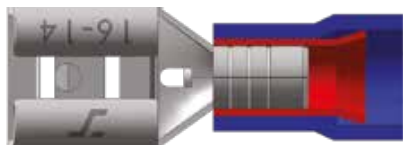

- Easy entry copper sleeve tin plated

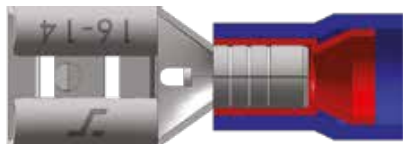

### Explanation part nr.

1 Type qualification	
B	Standard
E	Easy entry

2 Insulation execution	
F	Flared (half insulated)
L	Fully insulated

3 Insulation type	
V	Vinyl (PVC)
N	Nylon

4 Copper sleeve	
D	With Copper sleeve
No indication = Without	

5 Type indication	
DF	Disconnect Female
DM	Disconnect Male

6 Wire size mm <sup>2</sup>	
1.25	0,5 - 1,5 mm <sup>2</sup>
2	1,5 - 2,5 mm <sup>2</sup>
5.5	4 - 6 mm <sup>2</sup>

7 Tab size	
110	2,8 x 0,5 / 0,8
187	4,8 x 0,5 / 0,8
250	6,3 x 0,8
312	8,0 x 0,8
375	9,4 x 1,2

### Example:

**B F V D D M 2-250**

1 2 3 4 5 6 7

## INSULATED TERMINAL TYPES



We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.