


NOTES:  
 material: Zn  
 Dimension S varies (see ratings table)

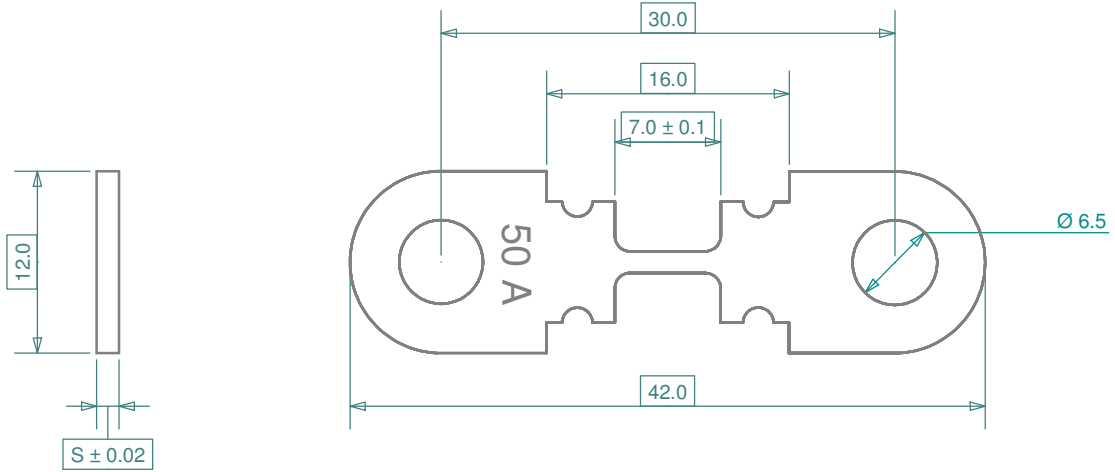

Fusing time [s]		
Load [%]	Minimum [s]	Maximum [s]
125 %	360,000	-
300 %	0.1	10
600 %	0.02	1
1000 %	0.01	0.3

AE ref.	Rating	Voltage	Thickness (S)
	[A]	[V]	[mm]
OMS-P030	30	32	0.40
OMS-P040	40	32	0.40
OMS-P050	50	32	0.40
OMS-P060	60	32	0.40
OMS-P070	70	32	0.40
OMS-P080	80	32	0.80
OMS-P100	100	32	0.80
OMS-P110	110	32	0.80
OMS-P125	125	32	0.80
OMS-P150	150	32	0.80
OMS-P175	175	32	0.80

Revisions			Date	Appr.		
	Date	Type	Drawn	11/11	AdH	
a	07/12	updated dimensions	Checked	07/12	AdH	
			Standards			
			Approved	07/12	AdH	
			Scale	2 : 1		
			Projection	Tolerance ± 0.2 mm unless otherwise noted		
					Title	OMS-P series, stripOTO fuse, O type
					Drawing type	schematic
				Drawing number	OMS-P drawing 1a	
				Sheet	1 of 1	
				Layers / Sheet	0 1 2 6 9	

