

SUMITUBE™ NHR4

[125°C rating, halogen-free, thin wall, very flexible, flame-retarded, heat-resistant tubing] UL recognized

Catalog No. 718 ✓ RoHS directive 10 substances

Waterproofing Flame-retarded UL recognized CSA recognized



Basic Properties

- Material : Irradiated cross-linked flexible flame-retarded polyolefin
- Shrink temperature : min. 100°C
- Shrink ratio : Radial change: min. 50%
Longitudinal change: -5 ± 5%
- Continuous operating temperature : -55 to 125°C

Features

- UL recognized
- Flexible
- Flame-retarded (halogen-based flame retardant-free)
- Thin wall, quick shrinkage

Specifications/Approvals

UL224

File No. E75077 Rating temperature: 125°C
Rating voltage: 300V Flammability: VW-1

Marking on Surface

125°C VW-1 SUMITUBE NHR4 -F- XXX
(XXX indicates size)

Applications

- Insulation, protection and reinforcement for termination and joints of electric wire
- Color identification and bundling for electric wires

Colors

- Black

Properties [UL224]


Properties	Items	Requirements	Typical values*1
Mechanical	Tensile strength (before aging)	min. 10.4MPa	11.9MPa
	Tensile strength (after aging)	158°C x 7 days, min. 7.3MPa	11.5MPa
	Elongation (before aging)	min. 200%	510%
	Elongation (after aging)	158°C x 7 days, min. 100%	460%
	Heat shock	250°C x 4 hours, no crack	Pass
Electrical	Cold bend	-30°C x 1 hour, no crack	Pass
	Dielectric withstand (before aging)	AC2.5kV x 60 sec., no breakdown	Pass
	Dielectric withstand (after aging)	158°C x 7 days, AC2.5kV x 60 sec., no breakdown	Pass
	Dielectric breakdown (before aging)	min. AC2.5kV	16.0kV
	Dielectric breakdown (after aging)	158°C x 7 days, min. 50% of original and min. AC2.5kV	Pass
Chemical	Volume resistivity	min. 1.0 x 10 ¹⁴ Ω·cm	4.0 x 10 ¹⁵ Ω·cm
	Corrosion against bare copper	158°C x 7 days, no corrosion after leaving under 95% humidity, 23°C x 24 hours	Pass
	Flammability	Flame-retarded, pass VW-1	Pass

*1: For reference use only

Sizes

Trade size (mm)	As supplied (mm)		After recovered (mm)		Unit length (min.) (m)
	Inside diameter	Wall thickness (nom.)	Inside diameter (max.)	Wall thickness (min.)	
1 × 0.1	1.40 ± 0.20	0.10	0.50	0.20	200
1.5 × 0.1	1.90 ± 0.20	0.10	0.75	0.20	200
2 × 0.1	2.30 ± 0.20	0.10	1.00	0.20	200
2.5 × 0.15	2.90 ± 0.20	0.15	1.25	0.25	200
3 × 0.15	3.30 ± 0.30	0.15	1.50	0.25	200
3.5 × 0.15	3.80 ± 0.30	0.15	1.75	0.25	200
4 × 0.15	4.40 ± 0.30	0.15	2.00	0.25	200
5 × 0.15	5.50 ± 0.30	0.15	2.50	0.25	100
6 × 0.15	6.5 ± 0.4	0.15	3.00	0.28	100
7 × 0.15	7.5 ± 0.4	0.15	3.50	0.28	50
8 × 0.15	8.5 ± 0.4	0.15	4.00	0.28	50
9 × 0.15	9.5 ± 0.4	0.15	4.50	0.28	50
10 × 0.15	10.5 ± 0.5	0.15	5.00	0.28	50

Shrink Properties

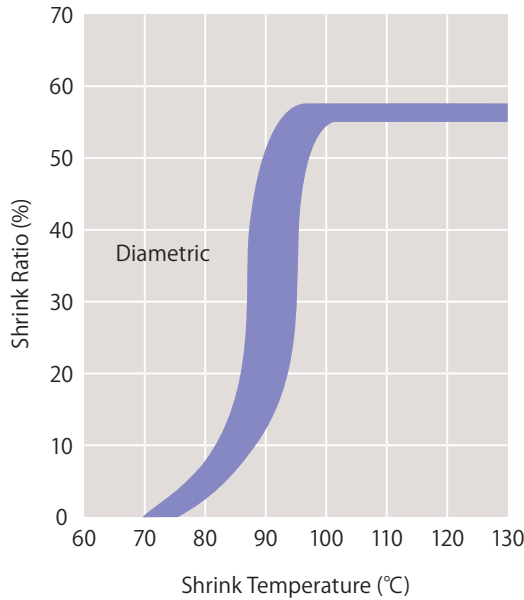

SUMITUBE™

A
C
A4
LA
C (UL)
D
A2

B
LB

F (Z)
F3 (Z)
NHR2
NHR4
V (300V)
V (600V)

F2 (Z)
F4 (Z)
B2
B2 (3X)
B8

K
K2

KH200 (TW)

KH230 (TW)

B6
R
AN25

W

O2C
W3C

O2B2
W3F2
W3B2
W3B2 (4X)
SA2
SA3

IRRAX™TUBE IRRAX™TAPE

A
B
F2
F2 (UL)
V2
RP3
B8
ER2
NHR
FE2
VZL

IRRAX™SLEEVE

SCM2
SBI
300/350
SNHM

Composite articles

SUMISEAL
SUMITUBE SA3 CAP

Processing equipment

SUMISHRINKER / HEATING GUN