



HRTM Medium Wall Tubing

Co-extruded medium wall tubing with hot melt adhesive lined

Shelf life & storage:

Heat Shrink Product provided by Hongshang has a over 5 year's shelf life from date of manufacture when stored in a humidity controlled environment (-10°C to 40°C and <75% relative humidity).



Ordering information:

Standard colors:
Black.


Features:

Dual wall, hot melt adhesive lined by co-extrusion	UV resistant
Flammable	Semi-rigid
Shrink ratio 3:1	Min. full recovery temp.: 120°C

Typical technical performances:

Test Items	Test Method	Test Requirements
Tensile strength	ASTM D 2671	12MPa min.
Ultimate elongation	ASTM D 2671	350% min.
Tensile strength after Aging at 150°C for 168hrs	ASTM D 2671	12MPa min.
Ultimate elongation after Aging at 150°C for 168hrs	ASTM D 2671	300% min.
Density	ASTM D 792	1.0~1.1g/cm ³
Dielectric strength	ASTM D 60243	12kV/mm(2mm) min.
Volume resistivity	ASTM D 2671	10 ¹² Ω.cm min.
Low temperature flexibility -40°C/4hrs	ASTM D 2671	No cracking of outer jacket
Properties of hot melt adhesive		
Softening point	ASTM E28	105+/-5°C
Peel strength(PE)	ASTM D 2671	4N/cm min.
Water absorption	ISO 62	0.2% max.

Dimensions:

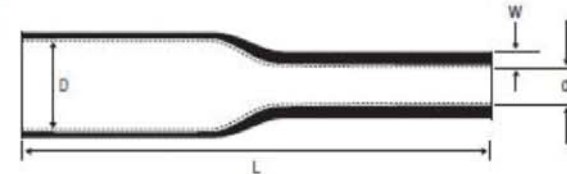

Size (mm)	As supplied (mm)			Standard length (m)	Size (mm)	After recovered (mm)			Standard length (m)
	D*(Min.)	d*(Max.)	w(Min.)			D*(Min.)	d*(Max.)	w(Min.)	
8/2	8	2	1.8	1.0-1.5	45/12	45	12	2.4	1.0-1.5
12/3	12	3	1.9	1.0-1.5	55/16	55	16	2.4	1.0-1.5
16/5	16	5	1.9	1.0-1.5	65/19	65	19	2.6	1.0-1.5
19/5	19	5	1.9	1.0-1.5	75/22	75	22	2.8	1.0-1.5
22/6	22	6	2.1	1.0-1.5	95/25	95	25	3.1	1.0-1.5
28/6	28	6	2.6	1.0-1.5	115/34	115	34	3.5	1.0-1.5
33/8	33	8	2.4	1.0-1.5	140/42	140	42	3.4	1.0-1.5
40/12	40	12	2.4	1.0-1.5	160/50	160	50	3.4	1.0-1.5

D* = Inner diameter as supplied
d* = Inner diameter after fully recovered

We reserve the right to make technical changes or modify the content.

HRA2/HR2
Medium Wall Tubing

HRTM
Medium Wall Tubing

HRA3/HR3
Heavy Wall Tubing

HRTH
Heavy Wall Tubing

HRA-6X
Heavy Wall Tubing

HRS
Medium Wall Tubing

HAT/HATA
Anti-tracking Tubing

HSC T
Semi-conductive Tubing

HSC-100
Stress Control Tubing

HSC-360
Stress Control Tubing

HDWT
Twin Layer Tubing

HTRT
Triple Layer Tubing

HGT
High Insulation Tubing

HEGT
High Insulation Tubing

HOT
Oil Resistant Tubing

HBTM/HBTH
Busbar Insulation Tubing

HLB
Low Voltage Breakout

HSEC
Insulating End Cap

HCFT
Cable Feed Thoughts

HCB
Conductive Breakout

HAS/HMB/HMR
Anti-tracking Rain Shed/Breakout/Boot