

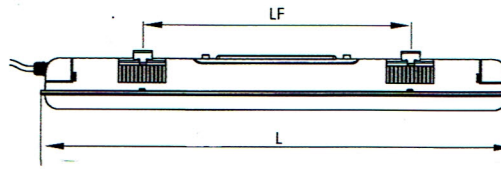
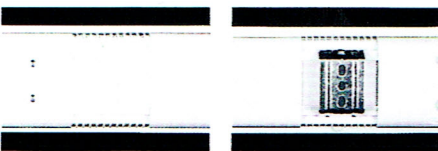
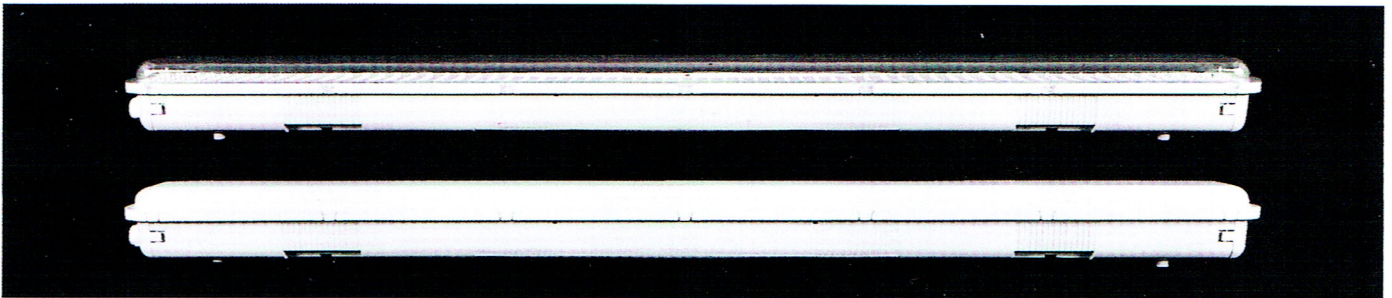
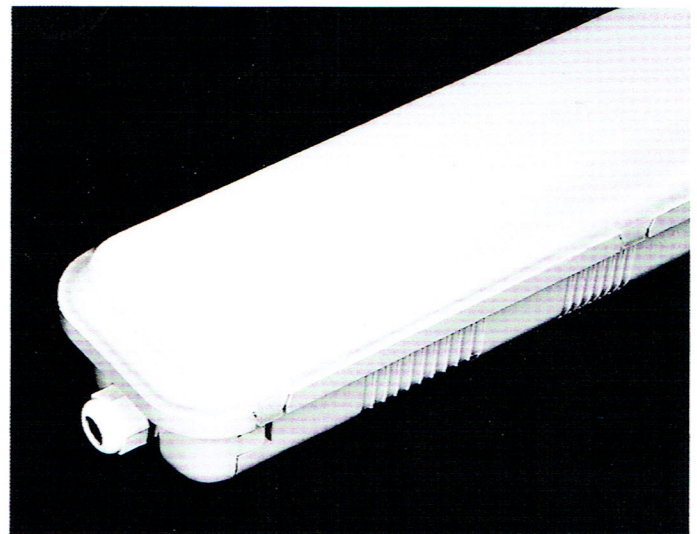


# WP SERIES

IP65 LED Waterproof Luminaire

# LiTE'A Ledlimpa

WP 22W/44W/56W/76W

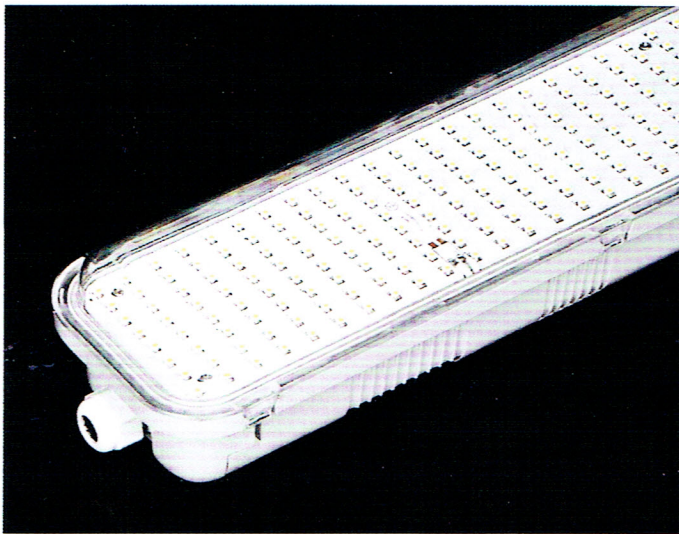

Model No.	Total Power	LED Q'ty	Ra	Diffuser Type	Lumen	Colour Temperature	Product Size LxWxH(mm)	LF (mm)	Q'ty /CTN (PCS)	Carton Size (mm)
WP-22W	25W	SMD3528 336PCS	Ra>70	Opal	2100	2700K-3000K 4000K-4500K 6000K-6500K	600x110x86	360	4	710x290x230
				Transparent	2500					
WP-44W	48W	SMD3528 672PCS	Ra>70	Opal	4100		1200x110x86	765	4	1280x290x230
				Transparent	4500					
WP-56W	60W	SMD3528 896PCS	Ra>70	Opal	5200		1530x110x86	940	4	1620x290x230
				Transparent	5800					
WP-76W	88W	SMD3528 1200PCS	Ra>70	Opal	6700		1860x110x86	1270	4	1950x290x230
				Transparent	7200					

### Product description:

- .Input: AC100V-240V, 50/60Hz
- .IP Rating: IP65, Class: II.
- .Driver: MEANWELL constant current driver or other options.
- .Reflector: MCPCB or PCB for your option.
- .Body and diffuser could meet the IK08, and 850 degree glow wire test requirement.
- .Perfect replacement for the whole set of T8 fluorescent lighting fixture.
- .Save up to 60% in electricity consumption compared to fluorescent lighting fixture.

- .Warm white, cool white and daylight CCT.
- .Maintenance free for lifespan of 35,000 hours.
- .Lightweight body material, corrosion resistant, waterproof and dustproof.
- .Easy installation with fast connection design, shorten the installation process and save labor cost.
- .It could be fitted with the Microwave sensor, fitted with the Emergency battery to meet the requirement.
- .DALI system also could be used in this LED lighting
- .Suitable for supermarket, underground parking, warehouse, etc.