








lunoo[®]
the lighting company

PG-TRACK





PG-TRACK OVERVIEW


		MOUNTED & SUSPENDED		RECESSED				
		FIXED	DALI	FIXED	DALI			
3-PHASE	PG-TRACK 3F	P4	PG-TRACK 3F DALI	P8	PG-TRACK IN 3F	P12	PG-TRACK IN 3F DALI	P16
								
1-PHASE			PG-TRACK 1F DALI	P20		PG-TRACK IN 1F DALI	P24	
								

PG-TRACK 3F

TOP VIEW

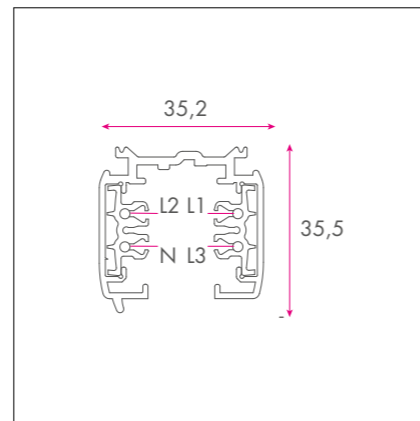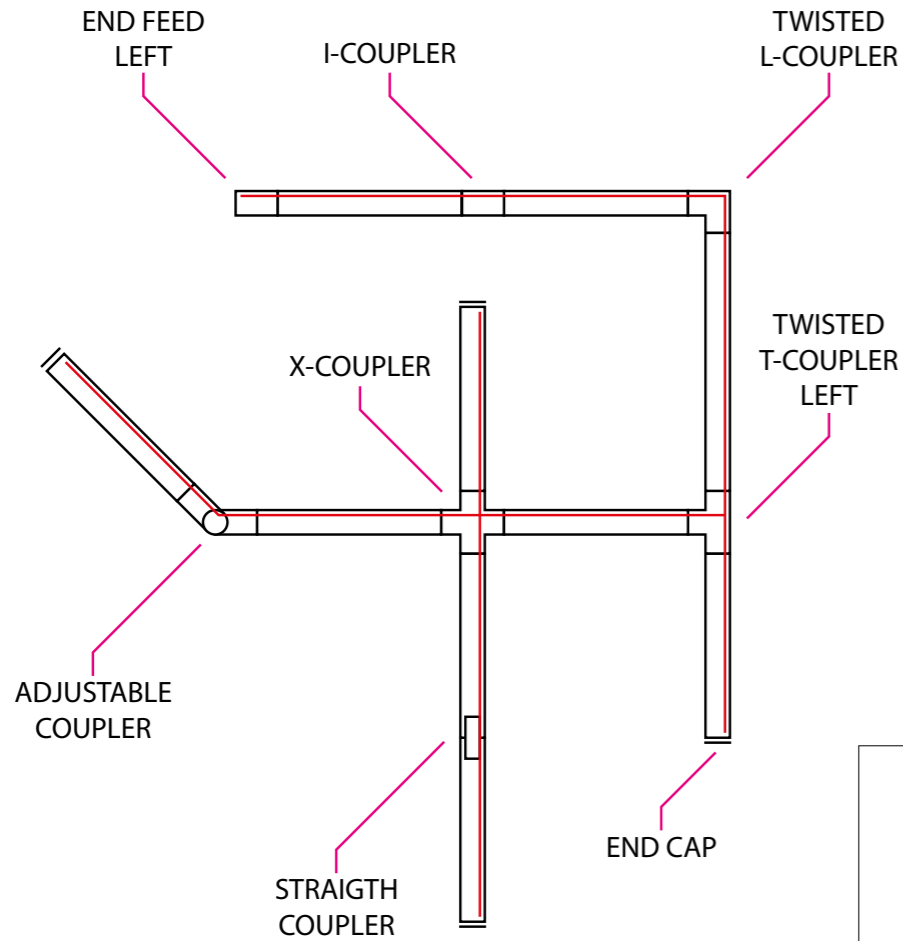


PG-TRACK 3F TRACK





- mounted or suspended
- 3-phase
- max. load 30 kg/m
- 1,2 or 3 meters
- black, white or grey

SUSPENSION COUPLER CLAMP




- connects 2 tracks mechanically
- black, white or grey

WIRE SUSPENSION CUP 5M




- suspension system for every ceiling type
- assembly of track clip, cable adjuster, steel wire and metal ceiling cup
- black, white or grey

WIRE SUSPENSION LOOP 5M




- suspension system for hooks
- assembly of track clip, cable adjuster and steel wire with loop
- black, white or grey

WIRE SUSPENSION STEEL DECK 5M




- suspension system for steel decks
- assembly of track clip, cable adjuster and steel wire with metal tab
- black, white or grey

T-PROFILE CLAMP



- mounting system for ceiling systems with a visible T-profile
- black, white or grey

SUSPENSION HOOK




- metal hook for suspending items to a track
- black, white or grey

TRACK COVER 3M



- plastic cover to hide the inside of a track
- black or white


SCHUKO ADAPTER



- power outlet for track
- black or white


PG-TRACK 3F

END FEED LEFT




- power connection to profile
- left polarisation
- black, white or grey

END FEED RIGHT




- power connection to profile
- right polarisation
- black, white or grey

STRAIGHT COUPLER




- electrical connection between 2 profiles
- black, white or grey

I-COUPLER




- electrical connection between 2 profiles
- optional power feed
- black, white or grey

ADJUSTABLE COUPLER




- electrical connection between 2 profiles
- adjustable angle of 180°
- black, white or grey

TWISTED L-COUPLER




- electrical connection in a 90° angle
- can be transformed into both left and right polarisation
- optional power feed
- black, white or grey

TWISTED T-COUPLER LEFT




- electrical connection for 3 tracks in a T-configuration
- can be transformed into both left polarities
- optional power feed
- black, white or grey

TWISTED T-COUPLER RIGHT




- electrical connection for 3 tracks in a T-configuration
- can be transformed into both right polarities
- optional power feed
- black, white or grey

X-COUPLER



- electrical connection for 4 tracks in an X-configuration
- optional power feed
- black, white or grey

END CAP





- to cover the end a track
- black, white or grey




PG-TRACK 3F DALI

TOP VIEW

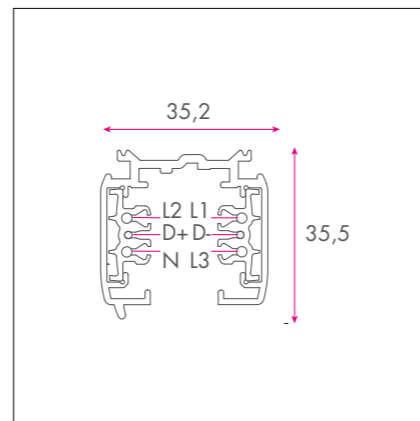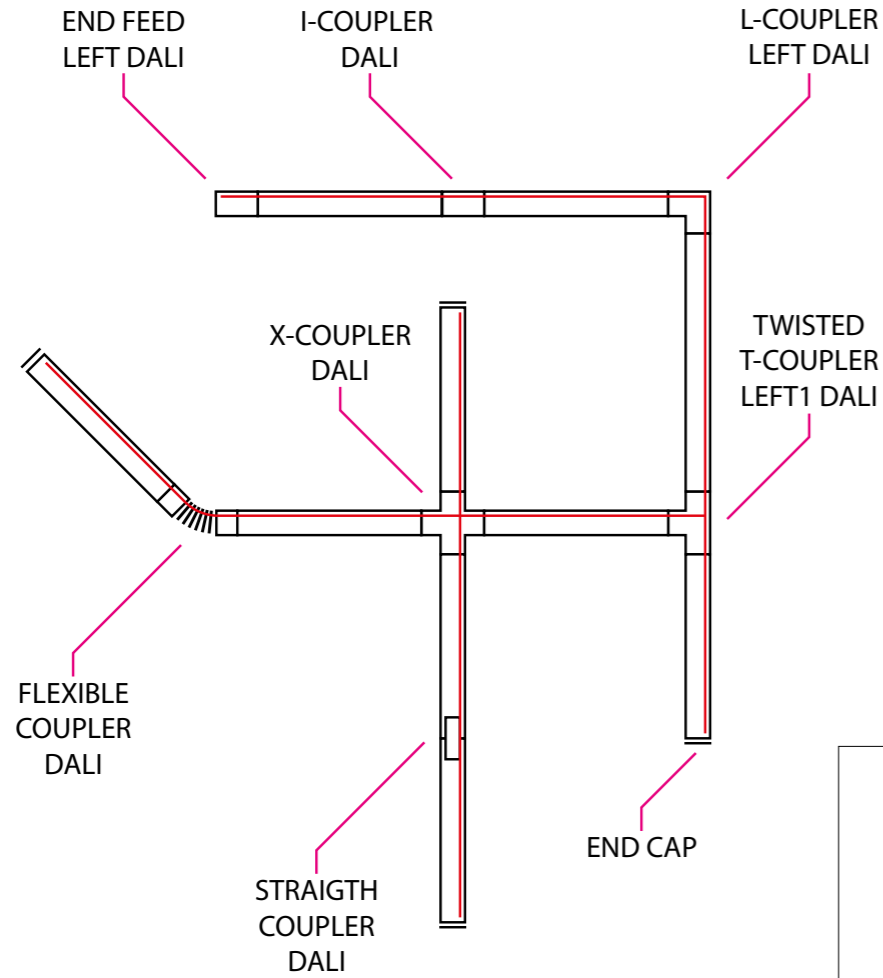


PG-TRACK 3F DALI TRACK




- mounted or suspended
- 3-phase
- dali
- max. load 30 kg/m
- 1,2 or 3 meters
- black, white or grey

SUSPENSION COUPLER CLAMP




- connects 2 tracks mechanically
- black, white or grey

WIRE SUSPENSION CUP 5M




- suspension system for every ceiling type
- assembly of track clip, cable adjuster, steel wire and metal ceiling cup
- black, white or grey

WIRE SUSPENSION LOOP 5M




- suspension system for hooks
- assembly of track clip, cable adjuster and steel wire with loop
- black, white or grey

WIRE SUSPENSION STEEL DECK 5M




- suspension system for steel decks
- assembly of track clip, cable adjuster and steel wire with metal tab
- black, white or grey

T-PROFILE CLAMP




- mounting system for ceiling systems with a visible T-profile
- black, white or grey

SUSPENSION HOOK




- metal hook for suspending items to a track
- black, white or grey

TRACK COVER 3M



- plastic cover to hide the inside of a track
- black or white


SCHUKO ADAPTER



- power outlet for track
- black or white


PG-TRACK 3F DALI

END FEED LEFT




- power connection to profile
- left polarisation
- black, white or grey

END FEED RIGHT




- power connection to profile
- right polarisation
- black, white or grey

STRAIGHT COUPLER




- electrical connection between 2 profiles
- black, white or grey

I-COUPLER




- electrical connection between 2 profiles
- optional power feed
- black, white or grey

FLEXIBLE COUPLER




- electrical connection between 2 profiles
- adjustable angle of 180°
- black, white or grey

L-COUPLER LEFT




- electrical connection in a 90° angle
- left polarisation
- optional power feed
- black, white or grey

L-COUPLER RIGHT




- electrical connection in a 90° angle
- right polarisation
- optional power feed
- black, white or grey

T-COUPLER LEFT1




- electrical connection for 3 tracks in a T-configuration
- left polarisation
- optional power feed
- black, white or grey

T-COUPLER LEFT2




- electrical connection for 3 tracks in a T-configuration
- left polarisation
- optional power feed
- black, white or grey

T-COUPLER RIGHT1




- electrical connection for 3 tracks in a T-configuration
- right polarisation
- optional power feed
- black, white or grey

T-COUPLER RIGHT2




- electrical connection for 3 tracks in a T-configuration
- right polarisation
- optional power feed
- black, white or grey

X-COUPLER



- electrical connection for 4 tracks in an X-configuration
- optional power feed
- black, white or grey

END CAP





- to cover the end of a track
- black, white or grey




PG-TRACK IN 3F

TOP VIEW

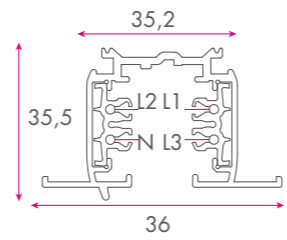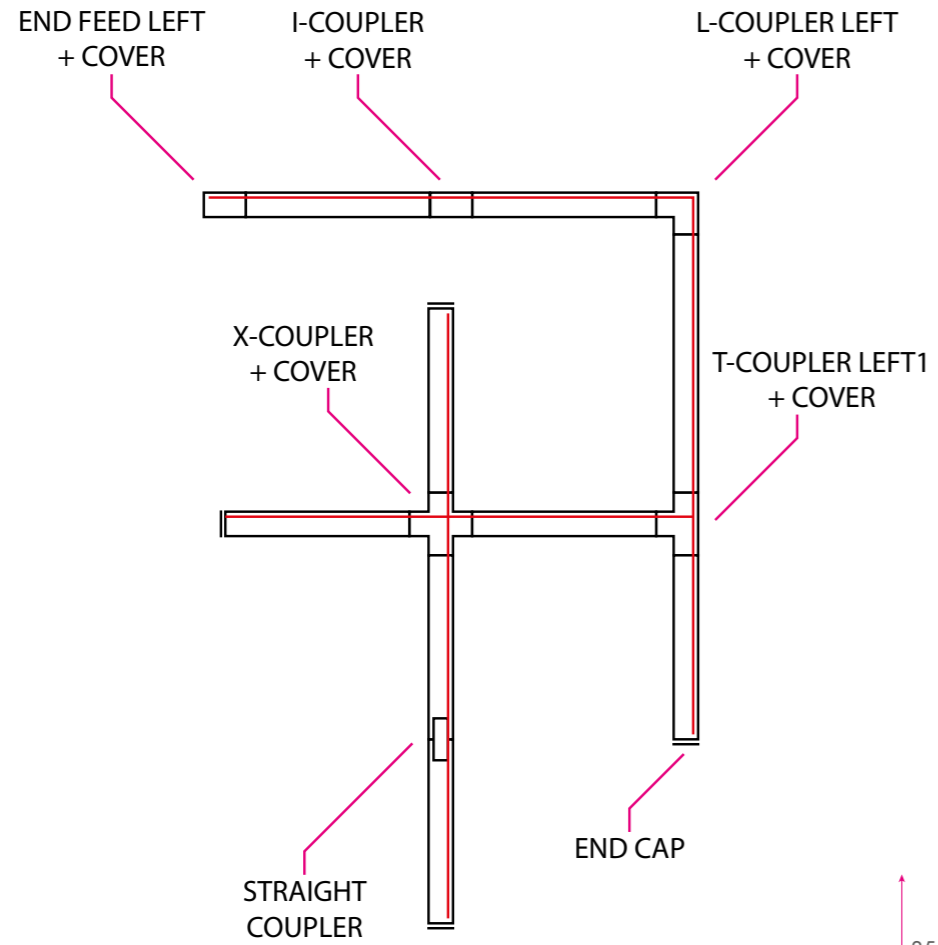


PG-TRACK IN 3F TRACK



- recessed
- 3-phase
- max. load 30 kg/m
- 1,2 or 3 meters
- black, white or grey

SUSPENSION HOOK




- metal hook for suspending items to a track
- black, white or grey

TRACK COVER 3M



- plastic cover to hide the inside of a track
- black or white

SCHUKO ADAPTER




- power outlet for track
- black or white




PG-TRACK IN 3F

END FEED LEFT + COVER




- power connection to profile
- cover included
- left polarisation
- black, white or grey

END FEED RIGHT + COVER




- power connection to profile
- cover included
- right polarisation
- black, white or grey

STRAIGHT COUPLER




- electrical connection between 2 profiles
- black, white or grey

ICOUPLER + COVER





- electrical connection between 2 profiles
- cover included
- optional power feed
- black, white or grey

TWISTED L-COUPLER + COVER




- electrical connection in a 90° angle
- cover included
- can be transformed into both left and right polarisation
- optional power feed
- black, white or grey

TWISTED T-COUPLER LEFT + COVER




- electrical connection for 3 tracks in a T-configuration
- cover included
- can be transformed into both left polarities
- optional power feed
- black, white or grey

TWISTED T-COUPLER RIGHT + COVER




- electrical connection for 3 tracks in a T-configuration
- cover included
- can be transformed into both right polarities
- optional power feed
- black, white or grey

X-COUPLER + COVER



- electrical connection for 4 tracks in an X-configuration
- cover included
- optional power feed
- black, white or grey

END CAP





- to cover the end of a track
- black, white or grey




PG-TRACK IN 3F DALI

TOP VIEW

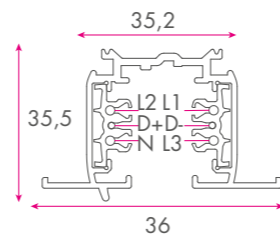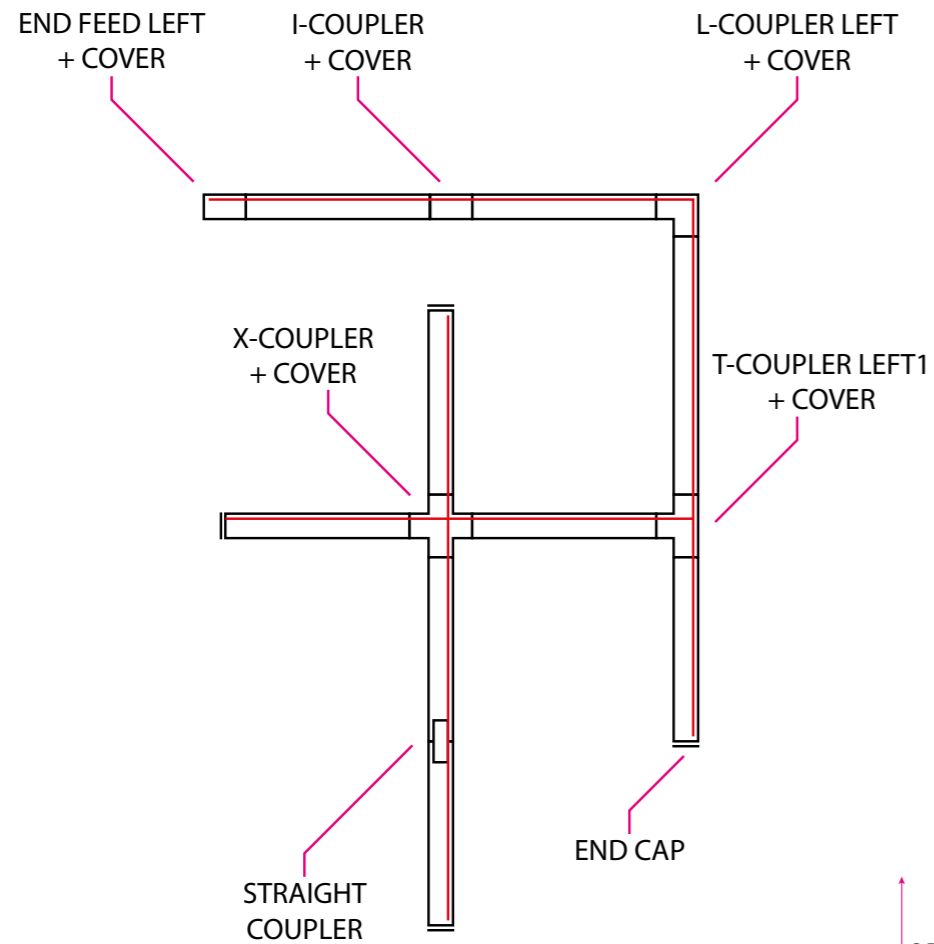


PG-TRACK IN 3F DALI TRACK



- recessed
- 3-phase
- dali
- max. load 30 kg/m
- 1,2 or 3 meters
- black, white or grey

SUSPENSION HOOK




- metal hook for suspending items to a track
- black, white or grey

TRACK COVER 3M



- plastic cover to hide the inside of a track
- black or white

SCHUKO ADAPTER




- power outlet for track
- black or white





PG-TRACK IN 3F DALI

END FEED LEFT DALI + COVER




- power connection to profile
- cover included
- left polarisation
- black, white or grey

END FEED RIGHT DALI + COVER




- power connection to profile
- cover included
- right polarisation
- black, white or grey

STRAIGHT COUPLER DALI




- electrical connection between 2 profiles
- black, white or grey

ICOUPLER DALI + COVER




- electrical connection between 2 profiles with power feed
- cover included
- optional power feed
- black, white or grey

L-COUPLER LEFT DALI + COVER




- electrical connection in a 90° angle
- cover included
- left polarisation
- optional power feed
- black, white or grey

L-COUPLER RIGHT DALI + COVER




- electrical connection in a 90° angle
- cover included
- right polarisation
- optional power feed
- black, white or grey

T-COUPLER LEFT1 DALI + COVER




- electrical connection for 3 tracks in a T-configuration
- cover included
- left polarisation
- optional power feed
- black, white or grey

T-COUPLER LEFT2 DALI + COVER





- electrical connection for 3 tracks in a T-configuration
- cover included
- left polarisation
- optional power feed
- black, white or grey

T-COUPLER RIGHT1 DALI + COVER





- electrical connection for 3 tracks in a T-configuration
- cover included
- right polarisation
- optional power feed
- black, white or grey

T-COUPLER RIGHT2 DALI + COVER





- electrical connection for 3 tracks in a T-configuration
- cover included
- right polarisation
- optional power feed
- black, white or grey

X-COUPLER DALI + COVER



- electrical connection for 4 tracks in an X-configuration
- cover included
- optional power feed
- black, white or grey

END CAP





- to cover the end of a track
- black, white or grey




PG-TRACK 1F DALI

TOP VIEW

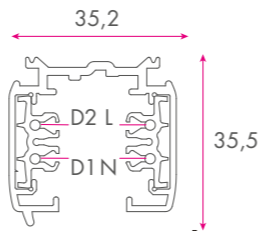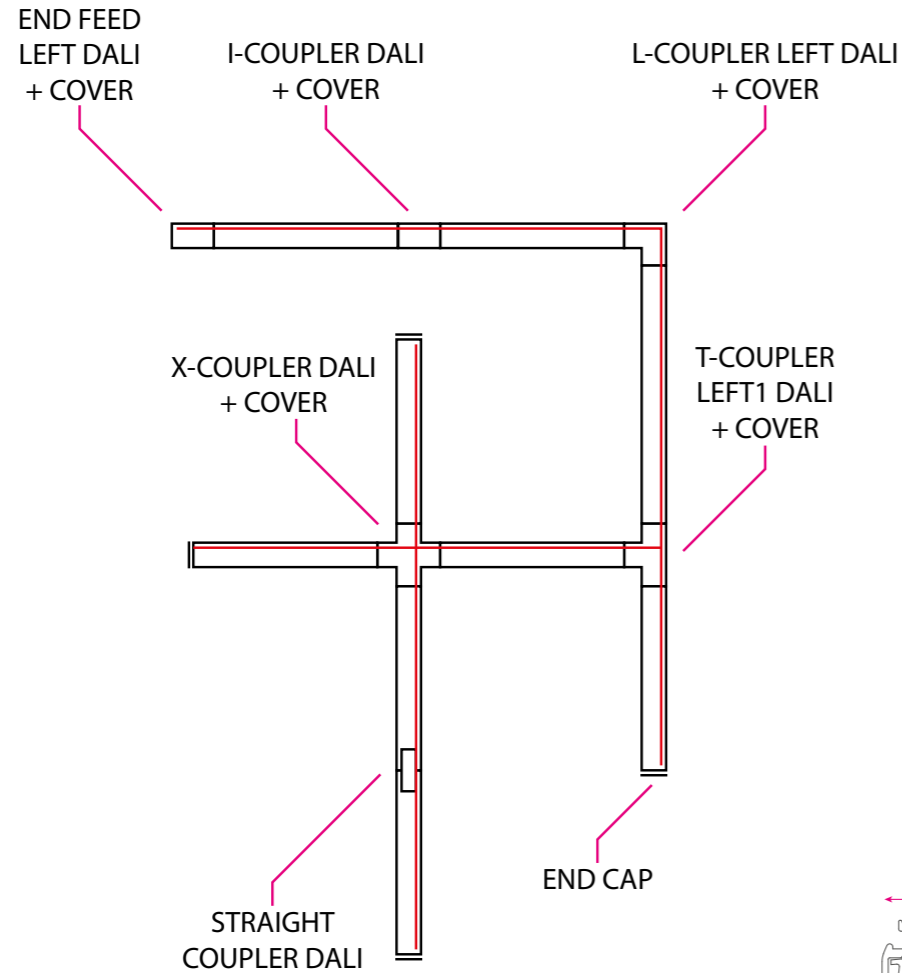


PG-TRACK 1F TRACK DALI




- mounted or suspended
- 1-phase
- dali
- max. load 30 kg/m
- 1,2 or 3 meters
- black, white or grey

SUSPENSION COUPLER CLAMP




- connects 2 tracks mechanically
- black, white or grey

WIRE SUSPENSION CUP 5M




- suspension system for every ceiling type
- assembly of track clip, cable adjuster, steel wire and metal ceiling cup
- black, white or grey

WIRE SUSPENSION LOOP 5M




- suspension system for hooks
- assembly of track clip, cable adjuster and steel wire with loop
- black, white or grey

WIRE SUSPENSION STEEL DECK 5M




- suspension system for steel decks
- assembly of track clip, cable adjuster and steel wire with metal tab
- black, white or grey

T-PROFILE CLAMP



- mounting system for ceiling systems with a visible T-profile
- black, white or grey

SUSPENSION HOOK



- metal hook for suspending items to a track
- black, white or grey


TRACK COVER 3M



- plastic cover to hide the inside of a track
- black or white


PG-TRACK 1F DALI

END FEED LEFT DALI




- power connection to profile
- left polarisation
- black, white or grey

END FEED RIGHT DALI




- power connection to profile
- right polarisation
- black, white or grey

STRAIGHT COUPLER DALI




- electrical connection between 2 profiles
- black, white or grey

ICOUPLER DALI




- electrical connection between 2 profiles with power feed
- optional power feed
- black, white or grey

FLEXIBLE COUPLER DALI




- electrical connection between 2 profiles
- adjustable angle of 180°
- black, white or grey

L-COUPLER LEFT DALI




- electrical connection in a 90° angle
- left polarisation
- optional power feed
- black, white or grey

L-COUPLER RIGHT DALI




- electrical connection in a 90° angle
- right polarisation
- optional power feed
- black, white or grey

T-COUPLER LEFT1 DALI




- electrical connection for 3 tracks in a T-configuration
- left polarisation
- optional power feed
- black, white or grey

T-COUPLER LEFT2 DALI




- electrical connection for 3 tracks in a T-configuration
- left polarisation
- optional power feed
- black, white or grey

T-COUPLER RIGHT1 DALI




- electrical connection for 3 tracks in a T-configuration
- right polarisation
- optional power feed
- black, white or grey

T-COUPLER RIGHT2 DALI




- electrical connection for 3 tracks in a T-configuration
- right polarisation
- optional power feed
- black, white or grey

X-COUPLER DALI



- electrical connection for 4 tracks in an X-configuration
- optional power feed
- black, white or grey

END CAP





- to cover the end of a track
- black, white or grey





PG-TRACK IN 1F DALI

TOP VIEW

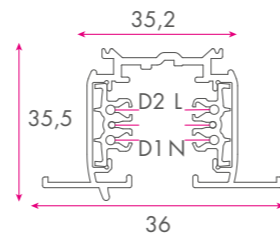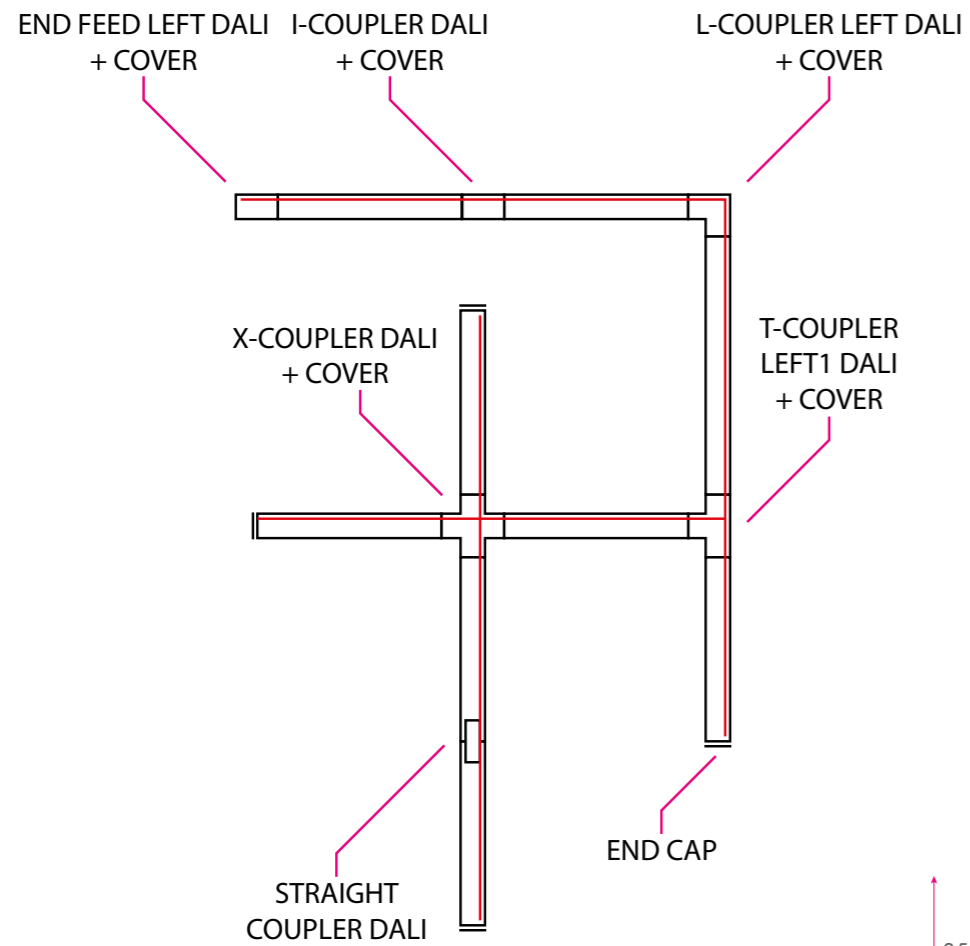


PG-TRACK IN 1F TRACK DALI



- 1,2 or 3 meters
- black, white or grey

SUSPENSION HOOK



- black, white or grey
- 5 meters of steel cable
- twist and lock on the profile

TRACK COVER 3M





- black, white or grey




PG-TRACK IN 1F DALI

END FEED LEFT DALI + COVER




- power connection to profile
- left polarisation
- cover included
- black, white or grey

L-COUPLER LEFT DALI + COVER




- electrical connection in a 90° angle
- left polarisation
- optional power feed
- cover included
- black, white or grey

T-COUPLER RIGHT2 DALI + COVER




- electrical connection for 3 tracks in a T-configuration
- right polarisation
- optional power feed
- cover included
- black, white or grey

END FEED RIGHT DALI + COVER





- power connection to profile
- right polarisation
- cover included
- black, white or grey

L-COUPLER RIGHT DALI




- electrical connection in a 90° angle
- right polarisation
- optional power feed
- cover included
- black, white or grey

X-COUPLER DALI + COVER




- electrical connection for 4 tracks in an X-configuration
- optional power feed
- cover included
- black, white or grey

STRAIGHT COUPLER DALI





- electrical connection between 2 profiles
- black, white or grey

T-COUPLER LEFT1 DALI + COVER




- electrical connection for 3 tracks in a T-configuration
- left polarisation
- optional power feed
- cover included
- black, white or grey

END CAP




- to cover the end of a track
- black, white or grey

I-COUPLER DALI + COVER




- electrical connection between 2 profiles with power feed
- optional power feed
- cover included
- black, white or grey

T-COUPLER LEFT2 DALI + COVER



- electrical connection for 3 tracks in a T-configuration
- left polarisation
- optional power feed
- cover included
- black, white or grey

T-COUPLER RIGHT1 DALI



- electrical connection for 3 tracks in a T-configuration
- right polarisation
- optional power feed
- cover included
- black, white or grey





Lunoo NV

Wantestraat 14
8780 Oostrozebeke
+32 56 676 100
info@lunoo.eu

lunoo[®]
the lighting company

"Lighting solutions for professional projects"