



lunoo[®]
the lighting company

APOLLO 170/190/215

PROUDLY MADE IN BELGIUM



CONFIGURATIONS

APOLLO 170

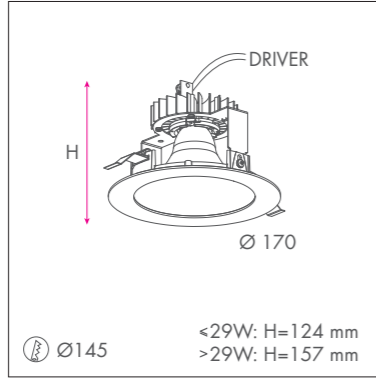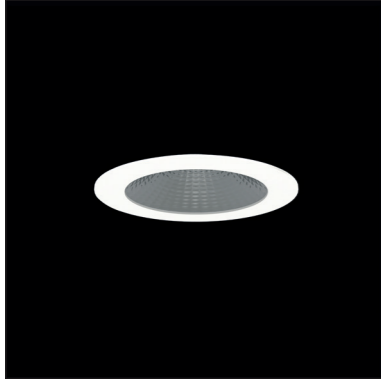


SYSTEM PWR	LUM. FLUX	CRI	CCT
14W	1929 lm	80	3000K
	2009 lm		4000K
	1543 lm	92	2700K
20W	1601 lm		3000K
	1725 lm		4000K
	2640 lm	80	3000K
24W	2750 lm		4000K
	3084 lm	80	3000K
	3213 lm		4000K
29W	2464 lm	92	2700K
	2558 lm		3000K
	2757 lm		4000K
31W	3506 lm	80	3000K
	3653 lm		4000K
	2801 lm	92	2700K
39W	2907 lm		3000K
	3134 lm		4000K
	4176 lm	80	3000K
35W	4345 lm		4000K
	3330 lm	92	2700K
	3457 lm		3000K
39W	3732 lm		4000K
	4519 lm	92	2700K
	4732 lm		3000K
35W	5097 lm		4000K
	3000 lm	95	Dim to warm 1800 - 3000K

APOLLO 190

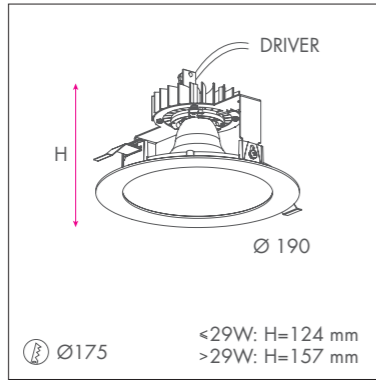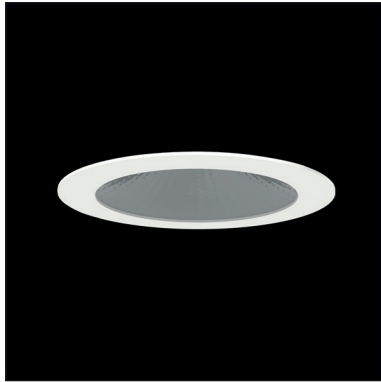

APOLLO 215

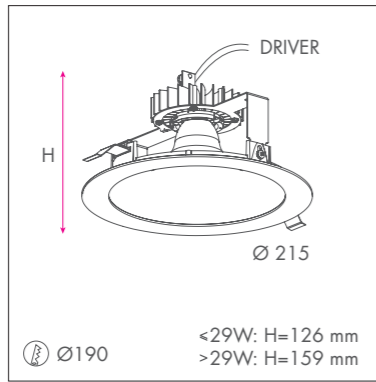

19W	1496 lm	85	Meat
27W	2064 lm	85	Meat
42W	2992 lm	85	Meat
19W	1552 lm	85	Gold
27W	2142 lm	85	Gold
42W	3104 lm	85	Gold



GENERAL INFO

- **Design**
 - Recessed luminaire
 - Round shape
 - Flat ceiling ring
- **Variations**
 - available in 3 diameters: 170, 190 & 215 mm
- **Materials**
 - Aluminium ceiling ring
 - Aluminium reflector
 - Aluminium heatsink
- **Optics**
 - Aluminium faceted reflector
 - 55°
 - Low UGR
- **Power source**
 - Independent 230V AC driver
 - Driver included
 - Dali optional
 - Casambi optional
 - Phasecut optional
- **Extra's**
 - Optional 1 hour emergency unit
 - Protective frosted glass
- **Light distribution curves**
 - See 'Apollo' product page on our website





Lunoo NV

Wantestraat 14
8780 Oostrozebeke
+32 56 676 100
info@lunoo.eu

lunoo[®]
the lighting company

"Lighting solutions for professional projects"