

# Slimline ICL

## Corrosion Rate and Cathodic Protection Data Ideal Interference Corrosion Analysis

### FEATURES

Complete instrumented test station (Big Fink or customized)

2 probe channels (native measurement option)

ER probe for measurement of corrosion rate

Verification of CP efficiency

Long battery life – solar option

Remote monitoring - cellular or satellite via Masterlink module

GPS time synchronization

Data presentation, analysis, reporting in Webservice and CP\*Manage

### MEASUREMENTS

- ✓ Corrosion Rate
- ✓ DC potential
  - ✓ On (pipeline)
  - ✓ Instant-off (coupon)
  - ✓ IR-free (coupon)
- ✓ DC current density
- ✓ AC voltage
- ✓ AC current density
- ✓ Spread resistance

### DATA AT YOUR FINGERTIPS – WHEREVER YOU ARE!

The Slimline ICL (Interference Corrosion Logger) is designed for comprehensive CP and AC or DC interference analysis and utilization of high sensitivity ER probes allows for direct verification of the effectiveness of any mitigation measures. Any measurement of corrosion can be analyzed wrt. relevant electrical fingerprints.

The MetriCorr ICL test station is part of a complete remote monitoring system for pipelines and associated components like T/R's, line current spans, critical bonds, etc.

Alike the rest of the MetriCorr Slimline product family, the ICL is intended as a remote monitoring unit (RMU), a data logging device, or simply as a spot reading device. It may be operated through the MetriCorr CP\*Manage Web or through the MetriCorr iOS/Android App.

The Slimline product family fits into Big Fink test stations (see example on the right), MetriCorr tests stations, junction boxes, or customized to fit into the operators preferred embodiment. Refer to info sheet IS-PL-70.

The Slimline logger series from MetriCorr are modular. The ICL module is the data-logging part of the Slimline ICL/MasterLink assembly where pipe, reference and ER or coupon channels are situated. The Masterlink Module is the remote monitoring unit (RMU) where power and communication is controlled.




Installation example



## Technical specifications

<b>Technical data</b>	
<b>Storage capacity</b>	+200 000 readings
<b>Logging interval</b>	10 min – ∞, Typically 1 hour 1s (intensive mode)
<b>Power supply options</b>	- Mains adapter 100–240 V AC / 12 V DC - Solar Power (MetriCorr types available) - Battery Module
<b>Battery Lifetime</b>	+3 years @ hourly logging, weekly upload +10 years @ 6 times daily
<b>Casing</b>	IP65
<b>Humidity</b>	0 to 100% RH condensing conditions
<b>Operating conditions</b>	-40°C to +85°C
<b>Transient protection</b>	1100 V for 150 ms – 20 kA @ 8/20 μs 12.5 kA @ 10/350 μs (optional)
<b>Test Station Options</b>	- Big Fink (example shown on p. 1) - MetriCorr Type Test Station - Junction Box - Customers' own spec
<b>Size L x W x H</b>	250 x 65 x 80 mm
<b>Communication</b>	- Cellular 4G with 3G and 2G fall back - Satellite (option) - Android or iOS App - Bluetooth - Ethernet (option) - GPS Time Synchronization - GNSS (Position)
<b>Voltage (Edc, Uac)</b>	Input resistance +10.0 MΩ Range 100 V Resolution 1 mV DC accuracy ± 1 mV ± 0.3% reading AC accuracy ± 1 mV ± 1% reading

The MetriCorr CP\*Manage WebService (data example on the right) is an intuitive and user-friendly online tool by which data can be viewed as trends in a table, graphically displayed, and easily analyzed statistically and/or optionally exported into excel or similar for a completely customized presentation. Data can be uploaded to CP\*Manage WebService manually, automatically by the RMU system or by the MetriCorr App.

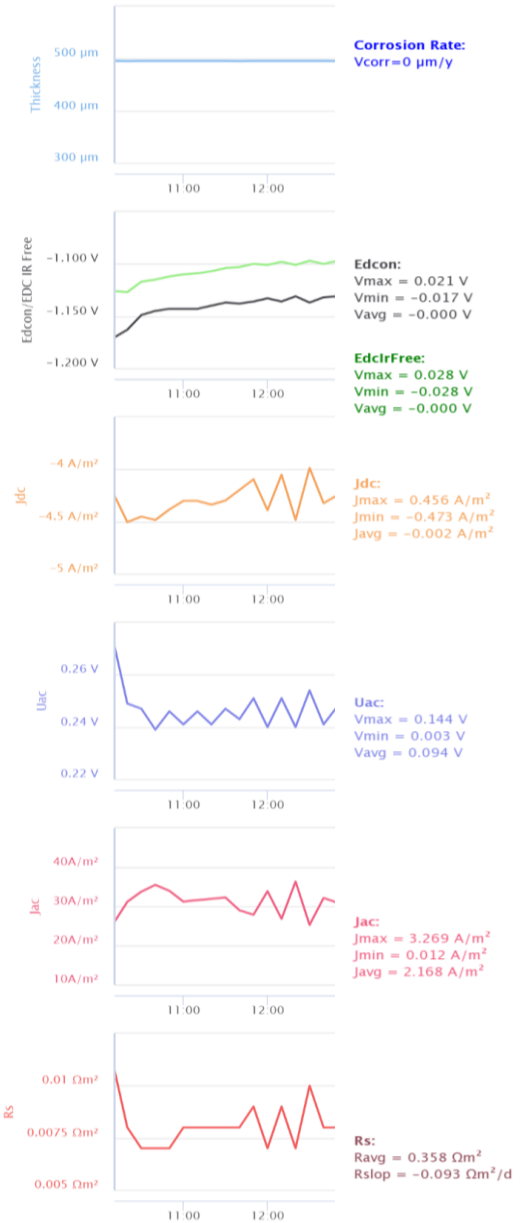

WebService data example

