


Decorative downlight luminaire for suspended ceilings, degree of water and dust-proof IP20 and IP44, for LED light sources, UGR<19.

<b>TECHNICAL DATA</b>	<b>Mounting:</b> in the ceiling, with mounting brackets (included)
	<b>Body:</b> aluminum
	<b>Colour:</b> white
<b>ELECTRICAL DATA</b>	<b>Power supply efficiency:</b> >89%
	<b>Electrical connection:</b> max 2x1,5 mm <sup>2</sup> wire
	<b>Power:</b> 220-240V 50/60Hz
	<b>Includes light source:</b> yes
<b>OPTICAL DATA</b>	<b>Type of equipment:</b> DALI
	<b>Light distribution:</b> circular
	<b>Way of lighting:</b> direct
	<b>Reflector:</b> aluminum, mat, faceted
<b>ADDITIONAL INFO</b>	<b>Operating temperature range:</b> 0° C ... +25° C
	<b>Lifetime (L70B50):</b> 50 000 h
<b>GENERAL DATA</b>	<b>Warranty:</b> 3 years
	<b>Application:</b> shopping centers, museums, galleries, exhibitions, exhibitions, offices, hotels, public utility facilities



Code	Replacement of conventional technology [W]	Degree of water and dust protection	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/ Ra
300031.00033	2x18W (48W)	IP20	16	20	2300	1900	95	3000	≥80
300031.00034	2x18W (48W)	IP20	16	20	2300	1900	95	4000	≥80
300031.00035	2x26W (64W)	IP20	22	26	3000	2700	104	3000	≥80
300031.00037	2x18W (48W)	IP20/44	16	20	2300	1900	95	3000	≥80
300031.00036	2x26W (64W)	IP20	22	26	3000	2700	104	4000	≥80
300031.00038	2x18W (48W)	IP20/44	16	20	2300	1900	95	4000	≥80
300031.00039	2x26W (64W)	IP20/44	22	26	3000	2700	104	3000	≥80
300031.00040	2x26W (64W)	IP20/44	22	26	3000	2700	104	4000	≥80

Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
300031.00033	240 105	215	132	1	0.7
300031.00034	240 105	215	132	1	0.7
300031.00035	240 105	215	132	1	0.7
300031.00037	240 105	215	132	1	0.7
300031.00036	240 105	215	132	1	0.7
300031.00038	240 105	215	132	1	0.7
300031.00039	240 105	215	132	1	0.7
300031.00040	240 105	215	132	1	0.7

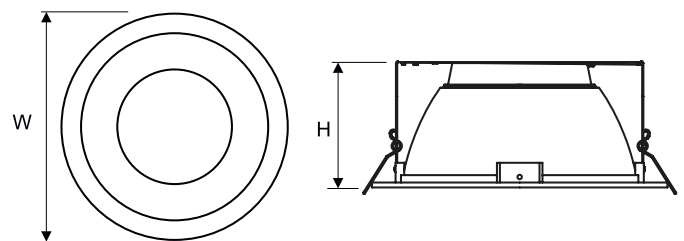

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.lugbox24.com](http://www.lugbox24.com)


## OTHER PICTURES

---



## LIGHT BEAM CURVES

---



Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.lugbox24.com](http://www.lugbox24.com)