




Decorative surface mounted luminaire for LED light sources.

TECHNICAL DATA	Mounting: directly on the ceiling Body: steel sheet and aluminum
ELECTRICAL DATA	Colour: white Power supply efficiency: >89% Electrical connection: max 3x2,5 mm ² wire Power: 220-240V 50/60Hz Includes light source: yes
OPTICAL DATA	Type of equipment: ED, DALI Light distribution: circular Way of lighting: direct
ADDITIONAL INFO	Reflector: aluminum, mat, faceted Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 3 years Application: shopping centers, museums, galleries, exhibitions, exhibitions, offices, hotels, public utility facilities



Code	Replacement of conventional technology [W]	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Type: STANDARD								
300031.00042	2x18W (48W)	16	18	2300	1900	106	3000	≥80
300031.00043	2x18W (48W)	16	18	2300	1900	106	4000	≥80
300031.00044	2x26W (64W)	22	24	3000	2500	104	3000	≥80
300031.00045	2x26W (64W)	22	24	3000	2500	104	4000	≥80
300031.00061	2x42W (102W)	39	44	5300	3950	90	3000	≥80
300031.00062	2x42W (102W)	39	44	5500	4100	93	4000	≥80
Type: DALI								
300031.00069	2x18W (48W)	16	18	2300	1900	106	3000	≥80
300031.00070	2x18W (48W)	16	18	2300	1900	106	4000	≥80
300031.00071	2x26W (64W)	22	24	3000	2500	104	3000	≥80
300031.00072	2x26W (64W)	22	24	3000	2500	104	4000	≥80
300031.00063	2x42W (102W)	39	44	5300	3950	90	3000	≥80
300031.00064	2x42W (102W)	39	44	5500	4100	93	4000	≥80

Code	Dimensions [mm] W H	Pallet quantity	Quantity in package	Net weight [kg]
Type: STANDARD				
300031.00042	242 238	72	1	1.7
300031.00043	242 238	72	1	1.7
300031.00044	242 238	72	1	1.7
300031.00045	242 238	72	1	1.7
300031.00061	242 238	72	1	1.7
300031.00062	242 238	72	1	1.7
Type: DALI				
300031.00069	242 238	72	1	1.7
300031.00070	242 238	72	1	1.7
300031.00071	242 238	72	1	1.7

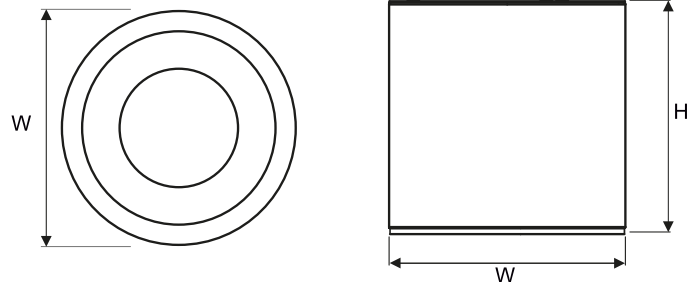


Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.lugbox24.com

Code	Dimensions [mm] W H	Pallet quantity	Quantity in package	Net weight [kg]
Type: DALI				
300031.00072	242 238	72	1	1.7
300031.00063	242 238	72	1	1.7
300031.00064	242 238	72	1	1.7

LIGHT BEAM CURVES

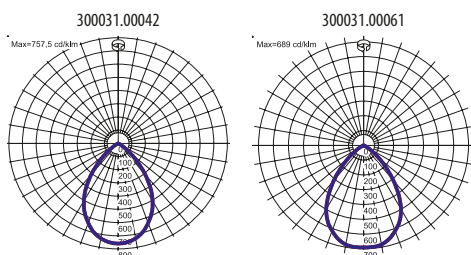

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.lugbox24.com