


Modern recessed luminaire for modular suspended ceilings for LED light sources.

TECHNICAL DATA	Mounting: directly in the ceiling construction Body: powder-painted steel sheet Colour: white
ELECTRICAL DATA	Power supply efficiency: >90% Electrical connection: max 3x2,5 mm ² wire Power: 220-240V 50/60Hz Includes light source: yes
OPTICAL DATA	Type of equipment: ED Light distribution: symmetric Way of lighting: direct Louvers: mat aluminum, matt white aluminum, polished aluminum
ADDITIONAL INFO	Available on request: DALI Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 3 years Application: offices, hospitals, laboratories, supermarkets, classrooms, auditorium



Code	Replacement of conventional technology [W]	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Louvers: mat aluminum								
300061.00116	3x14W (57W)	26	29	3550	2800	97	3000	≥80
300061.00117	3x14W (57W)	26	29	3650	2900	100	4000	≥80
300061.00118	4x14W (76W)	35	39	4700	3700	95	3000	≥80
300061.00119	4x14W (76W)	35	39	4850	3850	99	4000	≥80
Louvers: matt white aluminum								
300061.00120	3x14W (57W)	26	29	3550	2950	102	3000	≥80
300061.00121	3x14W (57W)	26	29	3650	3050	105	4000	≥80
300061.00122	4x14W (76W)	35	39	4700	3900	100	3000	≥80
300061.00123	4x14W (76W)	35	39	4850	4050	104	4000	≥80
Louvers: polished aluminum								
300061.00089	3x14W (57W)	26	29	3550	3000	103	3000	≥80
300061.00090	3x14W (57W)	26	29	3650	3100	107	4000	≥80
300061.00091	4x14W (76W)	35	39	4700	4000	103	3000	≥80
300061.00092	4x14W (76W)	35	39	4850	4100	105	4000	≥80

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
Louvers: mat aluminum					
300061.00116	595 595 65	600 600	44	1	2.7
300061.00117	595 595 65	600 600	44	1	2.7
300061.00118	595 595 65	600 600	44	1	2.7
300061.00119	595 595 65	600 600	44	1	2.7
Louvers: matt white aluminum					
300061.00120	595 595 65	600 600	44	1	2.7
300061.00121	595 595 65	600 600	44	1	2.7
300061.00122	595 595 65	600 600	44	1	2.7
300061.00123	595 595 65	600 600	44	1	2.7

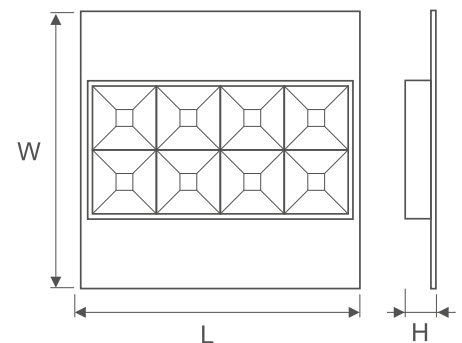

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.lugbox24.com

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
Louwer: polished aluminum					
300061.00089	595 595 65	600 600	44	1	2.7
300061.00090	595 595 65	600 600	44	1	2.7
300061.00091	595 595 65	600 600	44	1	2.7
300061.00092	595 595 65	600 600	44	1	2.7


OTHER PICTURES



Mat aluminum louver




Mat white aluminum louver



Polished aluminum louver

LIGHT BEAM CURVES

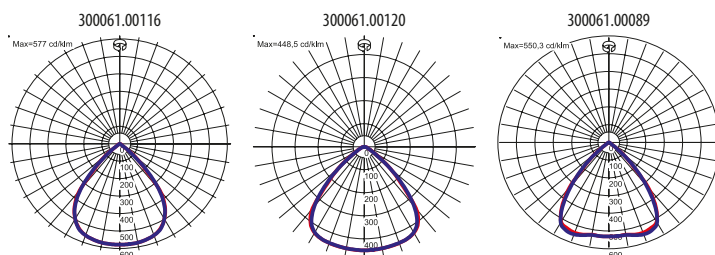

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.lugbox24.com