

Recessed luminaire with direct/indirect lighting performance for compact and linear fluorescent T5 lamps, for modular suspended (600x600 mm or 625x625 mm) and plasterboard ceilings.

**TECHNICAL DATA**

**Mounting:** directly in the ceiling construction, in the ceiling, with mounting brackets (on request)

**Body:** powder-painted steel sheet

**Colour:** white

**ELECTRICAL DATA**

**Power:** 220-240V 50/60Hz

**Includes light source:** no

**OPTICAL DATA**

**Way of lighting:** direct-indirect, indirect

**Louwer:** matt parabolic louwer (PAR MAT)

**ADDITIONAL INFO**

**Additional equipment:** mounting brackets for plaster-board ceiling

**GENERAL DATA**

**Warranty:** 2 years



Code	Power [W]	Light source / lamp	Stabilizer
050041.101.311X	2x14	T5 G5	HF
050041.102.311X	2x24	T5 G5	HF
050041.103.311X	2x40	TC-L 2G11	HF
050041.104.311X	2x55	TC-L 2G11	HF
050041.402.311X	2x14/24	T5 G5	MULTI
050041.101.312X	2x14	T5 G5	HF
050041.102.312X	2x24	T5 G5	HF
050041.103.312X	2x40	TC-L 2G11	HF
050041.104.312X	2x55	TC-L 2G11	HF
050041.402.312X	2x14/24	T5 G5	MULTI


050041.101.311



Diffuser

- 1 full
- 2 perforated

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Net weight [kg]
050041.101.311X	595 595 100	595 595	5.2
050041.102.311X	595 595 100	595 595	5.2
050041.103.311X	595 595 100	595 595	5.2
050041.104.311X	595 595 100	595 595	5.2
050041.402.311X	595 595 100	595 595	5.2
050041.101.312X	620 620 100	620 620	5.4
050041.102.312X	620 620 100	620 620	5.4
050041.103.312X	620 620 100	620 620	5.4
050041.104.312X	620 620 100	620 620	5.4
050041.402.312X	620 620 100	620 620	5.4

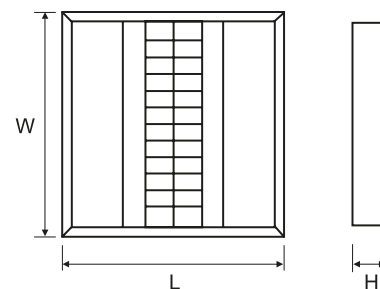

**OTHER PICTURES**

---

**ACCESSORIES**

---



150010.00200

Mounting bracket for plasterboard  
ceilings**OTHER PROJECTS**

---



Danvig Skole, Drammen, Norway