

Suspended decorative luminaire for LED light sources.

TECHNICAL DATA

Mounting: suspended, on wire suspension (included)

Body: plastic polyester reinforced with fiberglass

Colour: white, black

Diffuser: opal plexiglass (PLX), microprismatic diffuser (MPRM)

ELECTRICAL DATA

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

OPTICAL DATA

Way of lighting: direct

GENERAL DATA

Lifetime (L70B50): 50 000 h

Available on request: DIM 1..10V, DALI

Warranty: 5 years

Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques



Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Diffuser: opal plexiglass (PLX)							
20008X.5L01.1X1	36	43	5000	3800	88	3000	≥80
20008X.5L02.1X1	36	43	5200	3900	91	4000	≥80
Diffuser: microprismatic diffuser (MPRM)							
20008X.5L01.1X2	36	43	5000	3950	92	3000	≥80
20008X.5L02.1X2	36	43	5200	4100	95	4000	≥80

20008 [] .5L01.1 [] 2

- Colour of decorative elements
- 1 ■ pink
 - 2 ■ red
 - 3 ■ green
 - 4 ■ blue
 - 5 ■ yellow
 - 6 white
 - 7 black
- Body colour
- 1 white
 - 3 black

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com


Date of issue: 23-6-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
Diffuser: opal plexiglass (PLX)					
20008X.5L01.1X1	535 1150	380	2	1	8.2
20008X.5L02.1X1	535 1150	380	2	1	8.2
Diffuser: microprismatic diffuser (MPRM)					
20008X.5L01.1X2	535 1150	380	2	1	8.2
20008X.5L02.1X2	535 1150	380	2	1	8.2

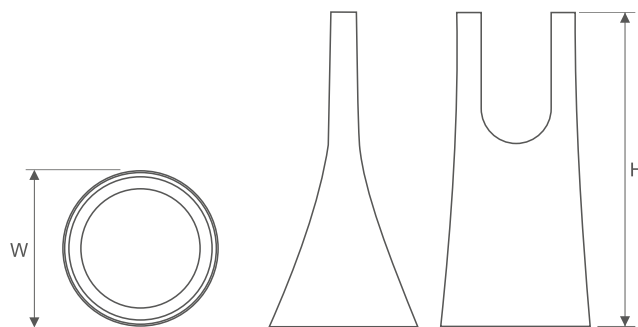

LIGHT BEAM CURVES

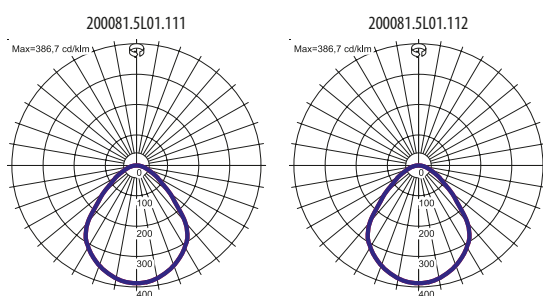

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 23-6-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires