

Modern downlight luminaire for LED light sources for plaster board ceilings.

TECHNICAL DATA

Mounting: in the ceiling, with mounting brackets (included)

Body: powder painted steel sheet and anodized aluminum

Colour: white, black

ELECTRICAL DATA

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

OPTICAL DATA

Way of lighting: direct


GENERAL DATA

Available on request: metal halide lamps (on request), DALI

Other remarks: for metal halide version - please order MH light sources

Warranty: 5 years

Application: hotels, offices, delicatessen, galleries, boutiques, shopping centers

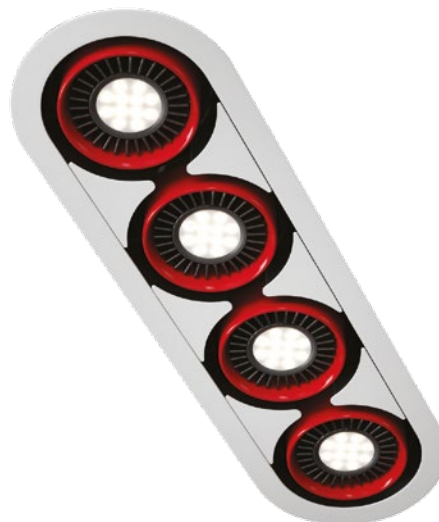

Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
22002X.5L401.3X4	24°	4x17,5	83	4x1560	6240	75	4000	92
22002X.5L402.3X4	24°	4x17,5	83	4x1430	5720	69	3000	92
22002X.5L403.3X4	40°	4x17,5	83	4x1560	6240	75	4000	92
22002X.5L404.3X4	40°	4x17,5	83	4x1430	5720	69	3000	92

22002 .5L101.3 1


Colour of decorative elements

- 1 pink
- 2 red
- 3 green
- 4 blue
- 5 yellow
- 6 white
- 7 black

Body colour

- 1 white
- 3 black

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
22002X.5L401.3X4	652 196 144	25	1	5.2
22002X.5L402.3X4	652 196 144	25	1	5.2
22002X.5L403.3X4	652 196 144	25	1	5.2
22002X.5L404.3X4	652 196 144	25	1	5.2

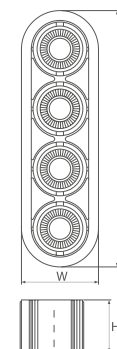

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 23-6-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

LIGHT BEAM CURVES

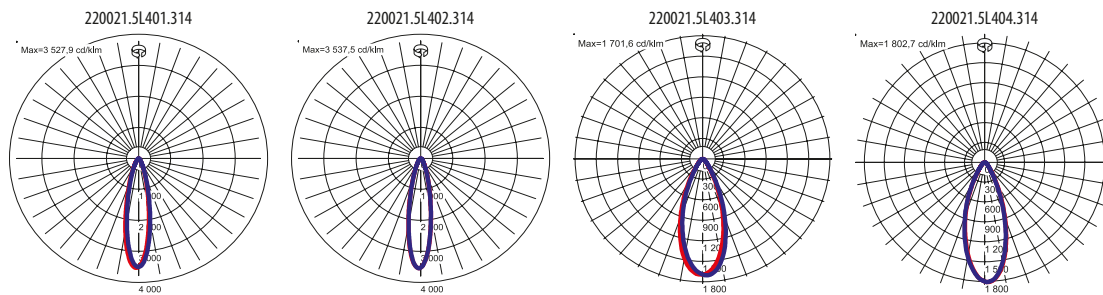

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 23-6-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires