

Industrial luminaire for LED light sources.

TECHNICAL DATA

Mounting: surface mounted, in the ceiling, with mounting frame (sold separately), suspended, manufacturer does not provide suspension components

Body: high pressure die-cast aluminum

Colour: gray

Diffuser: tempered glass

ELECTRICAL DATA

Power supply efficiency: 90%

Power: 120-270V 50Hz

Includes light source: yes

Type of equipment: ED, DALI

Electrical connection: max 3x2,5 mm² wire, max 5x2,5 mm² wire

OPTICAL DATA

Light distribution: rotationally-symmetric

Way of lighting: direct

Type of optic: lens

GENERAL DATA

Lifetime (L70B50): 100 000 h

Lifetime (L80B10): 60 000 h

Lifetime (TM21 L90B10): 40 000 h

Additional information: Ball impact resistance

Other remarks: Available with limited glance.

Warranty: 5 years

Application: warehouses, logistics centers, industrial facilities, sport facilities, roofing, outdoor installation without roof on special request (index extension: .985)



Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
Type: STANDARD									
090342.5L04.01X	55°	206	220	22000	19800	90	4000	≥80	-30 ... +35
090342.5L01.01X	55°	206	220	25000	22500	102	4000	≥70	-30 ... +35
090342.5L02.01X	55°	206	220	26600	24000	109	5700	≥70	-30 ... +35
090342.5L03.01X	55°	206	220	26600	24000	109	6500	≥70	-30 ... +35
Type: DALI									
090342.3L04.01X	55°	206	220	22000	19800	90	4000	≥80	-30 ... +40
090342.3L01.01X	55°	206	220	25000	22500	102	4000	≥70	-30 ... +40
090342.3L02.01X	55°	206	220	26600	24000	109	5700	≥70	-30 ... +40
090342.3L03.01X	55°	206	220	26600	24000	109	6500	≥70	-30 ... +40
Type: EXTREME (without lenses)									
090342.5L05.115	100°	200	214	29000	27000	126	4000	≥80	-30 ... +50

090342.5L04.01	□	. 985
		Type of luminaires
		985 Luminaires for outdoor installation without roof on special request
		Beam angle
	1	55°
	3	110°
	4	120x40°
	6	70° - luminaire with reduced UGR


Outdoor installation without roof on special request (index extension: .985).

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
Type: STANDARD					
090342.5L04.01X	675 398 90	590	30	1	11.0
090342.5L01.01X	675 398 90	590	30	1	11.0
090342.5L02.01X	675 398 90	590	30	1	11.0
090342.5L03.01X	675 398 90	590	30	1	11.0
Type: DALI					
090342.3L04.01X	675 398 90	590	30	1	11.0
090342.3L01.01X	675 398 90	590	30	1	11.0
090342.3L02.01X	675 398 90	590	30	1	11.0
090342.3L03.01X	675 398 90	590	30	1	11.0
Type: EXTREME (without lenses)					
090342.5L05.115	675 398 200	590	30	1	11.0

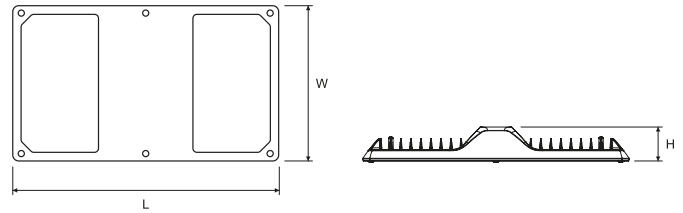

OTHER PICTURES



Luminaire with reduced UGR

ACCESSORIES



150020.00823

Adjustable mounting bracket



150021.00918


Frame for recessed mounting



150020.00824

Bracket for surface mounting

LIGHT BEAM CURVES

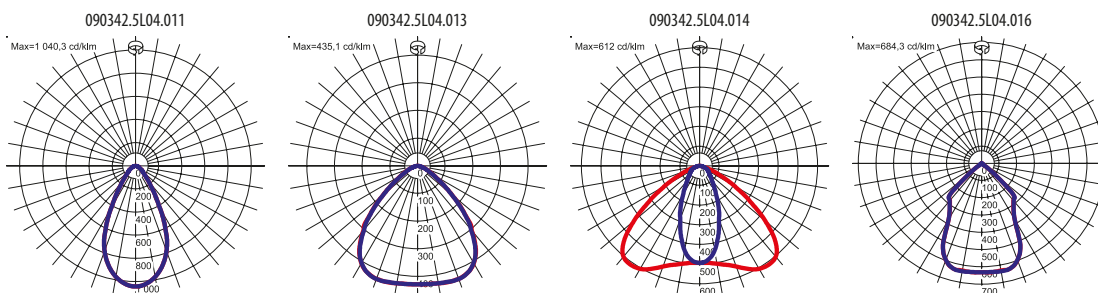

Outdoor installation without roof on special request (index extension: .985).

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com