

Modern floodlight for LED light source.

<b>TECHNICAL DATA</b>	<b>Mounting:</b> on the adjustable holder, on the substrate <b>Body:</b> high pressure die-cast aluminum <b>Lateral Surface Wind Exposed:</b> 0.163 m <sup>2</sup> <b>Colour:</b> gray <b>Diffuser:</b> tempered glass
<b>ELECTRICAL DATA</b>	<b>Power supply efficiency:</b> >92% <b>Power:</b> 220-240V 50/60Hz <b>Includes light source:</b> yes <b>Type of equipment:</b> ED, EASY CONNECT <b>Electrical connection:</b> max 3x2,5 mm <sup>2</sup> wire
<b>OPTICAL DATA</b>	<b>Light distribution:</b> circular, asymmetric-narrow, asymmetric-wide <b>Way of lighting:</b> direct <b>Type of optic:</b> lens
<b>ADDITIONAL INFO</b>	<b>Available on request:</b> LLOC, DALI, DIM 1..10V <b>Operating temperature range:</b> -30°C ... +35°C <b>Lifetime (L70B50):</b> 50 000 h
<b>GENERAL DATA</b>	<b>Warranty:</b> 5 years <b>Application:</b> industrial facilities, warehouses, metro, parking areas, facades




Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
<b>Beam angle: 25°</b>							
120202.5L011.1X	152	168	18200	15110	90	4000	>70
120202.5L021.1X	152	168	20400	16930	101	5700	>70
120202.5L031.1X	152	168	21200	17600	105	6500	>70
<b>Beam angle: 50°</b>							
120202.5L011.2X	152	168	18200	14900	89	4000	>70
120202.5L021.2X	152	168	20400	16700	99	5700	>70
120202.5L031.2X	152	168	21200	17360	103	6500	>70
<b>Beam angle: asymmetric-narrow</b>							
120202.5L011.3X	152	168	18200	14640	87	4000	>70
120202.5L021.3X	152	168	20400	16410	98	5700	>70
120202.5L031.3X	152	168	21200	17050	101	6500	>70
<b>Beam angle: asymmetric-wide</b>							
120202.5L011.4X	152	168	18200	14470	86	4000	>70
120202.5L021.4X	152	168	20400	16220	97	5700	>70
120202.5L031.4X	152	168	21200	16860	100	6500	>70

120202.5L011.1



- Type of equipment
- 1 STANDARD
  - 2 EASY CONNECT

Luminous flux tolerance +/- 10%.

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
<b>Beam angle: 25°</b>				
120202.5L011.1X	403 405 95	24	3	8.8
120202.5L021.1X	403 405 95	24	3	8.8
120202.5L031.1X	403 405 95	24	3	8.8
<b>Beam angle: 50°</b>				
120202.5L011.2X	403 405 95	24	3	8.8
120202.5L021.2X	403 405 95	24	3	8.8
120202.5L031.2X	403 405 95	24	3	8.8
<b>Beam angle: asymmetric-narrow</b>				
120202.5L011.3X	403 405 95	24	3	8.8
120202.5L021.3X	403 405 95	24	3	8.8
120202.5L031.3X	403 405 95	24	3	8.8
<b>Beam angle: asymmetric-wide</b>				
120202.5L011.4X	403 405 95	24	3	8.8
120202.5L021.4X	403 405 95	24	3	8.8
120202.5L031.4X	403 405 95	24	3	8.8

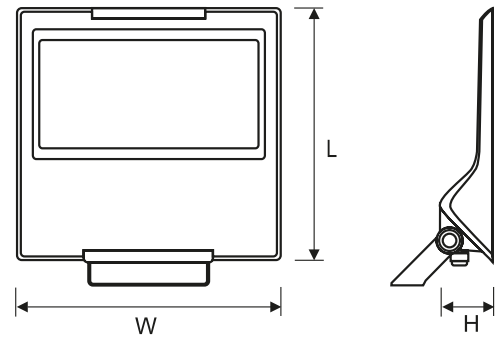


## OTHER PICTURES



EASY CONNECT

## LIGHT BEAM CURVES

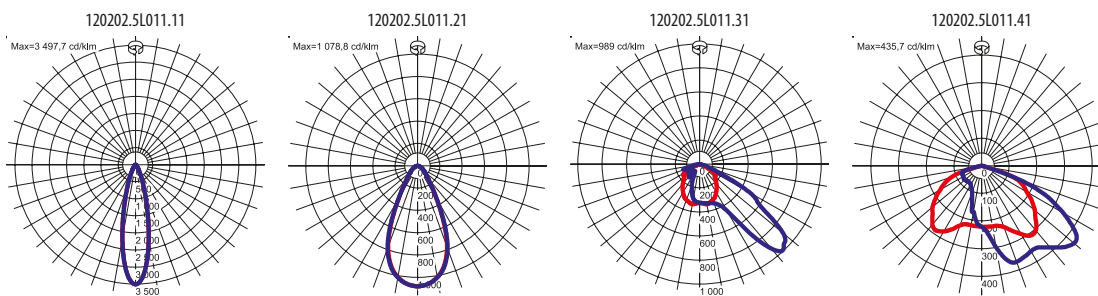

Luminous flux tolerance +/- 10%.