



DRIFT

Product Image


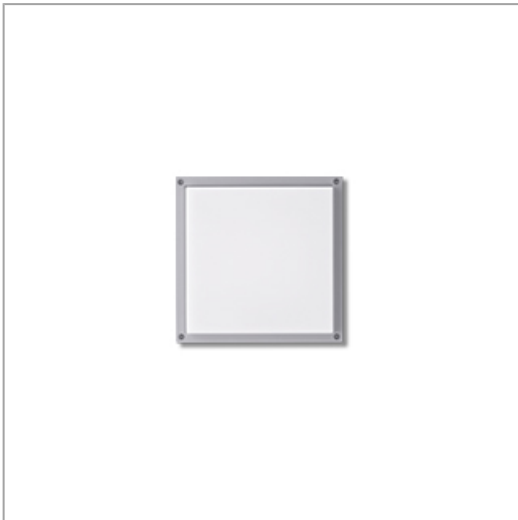


Application Type: GENERAL WALL LIGHT
Product Name: Mini Flat DRIFT
Ordering Code: 7024-0-3-803-XX
Lamp Type: LED
Socket: N/A
Watt: 14 W
Lumen: 1200 lm
Beam: N/A
Kelvin: 3000 K

Dimension

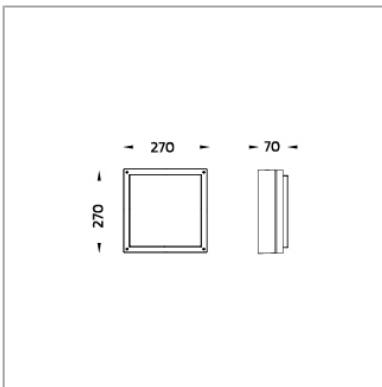

Light Distribution



*Due to the constancy of product development,
we reserve the right to alter all specification
without prior notice.

DRIFT

Specification

| | |
|---------------------------|--|
| IEC Standard | IEC 60598-1 General Requirement IEC 60598-2-1 Fixed Luminaires |
| Protection | IP65 Class I |
| IK Rating | Protection against mechanical impact IK09 on body and optical part. |
| Luminaires Body Housing | High-pressure Die Cast Aluminium alloy body and components. |
| Coating Process | Nano Ceramic surface conversion, resistant to corrosive environment. Luminaire primarily coated with epoxy resin and top coated with UV stabilized polyester powder and cured in digital temperature controlled chamber at 200°C. |
| Diffuser | Self-extinguishing high impact resistant opal polycarbonate diffuser with UV stabilized additive. Material from Teijin – Japan. |
| Gasket | Weather resistant silicone gasket. Working temperature -40°C to +200°C. |
| External screws | External screws are in stainless steel with protection dipping. |
| Cable Entry | Cable entry protected by M16 cable gland from Lapp Kabel. To be used with H05RN-F/ H07RN-F cable with 5-10mm. diameter. |
| LED | High efficiency SMD LED module with built-in constant current LED driver. Replacable module for future upgrade or maintenance. |
| Internal wire | Tinned copper conductor with PTFE insulated internal wire from EMC Colosio or equivalents. IMQ approved. Working temperature -40°C to +250°C. |
| Terminal Block/ Connector | Terminal block in GFR PA6.6 for cable with cross section up to 2.5mm ² . VDE approved. |
| Caution | Installation work has to be carried on according to the enclosed installation manual. |
| Color | Black (replace the last 2 digits of ordering code with 01) Graphite (replace the last 2 digits of ordering code with 02) Dark Gray (replace the last 2 digits of ordering code with 03) Aluminium Silver (replace the last 2 digits of ordering code with 04) White (replace the last 2 digits of ordering code with 06) |