




Invisible 40 Wood



Height Înălțime (H) mm	Length Lățime (L) mm	Centres Interax (A) mm	No el Nr elemente pcs	Weight Greutate kg	Volume Volum l	Output / Putere termică (watt) $\Delta t=30^{\circ}\text{C}$	Output / Putere termică (watt) $\Delta t=50^{\circ}\text{C}$
						ral W	ral W
1500	419	50	18	31.00	7.60	736	1,404
1800	419	50	18	37.00	9.00	877	1,674

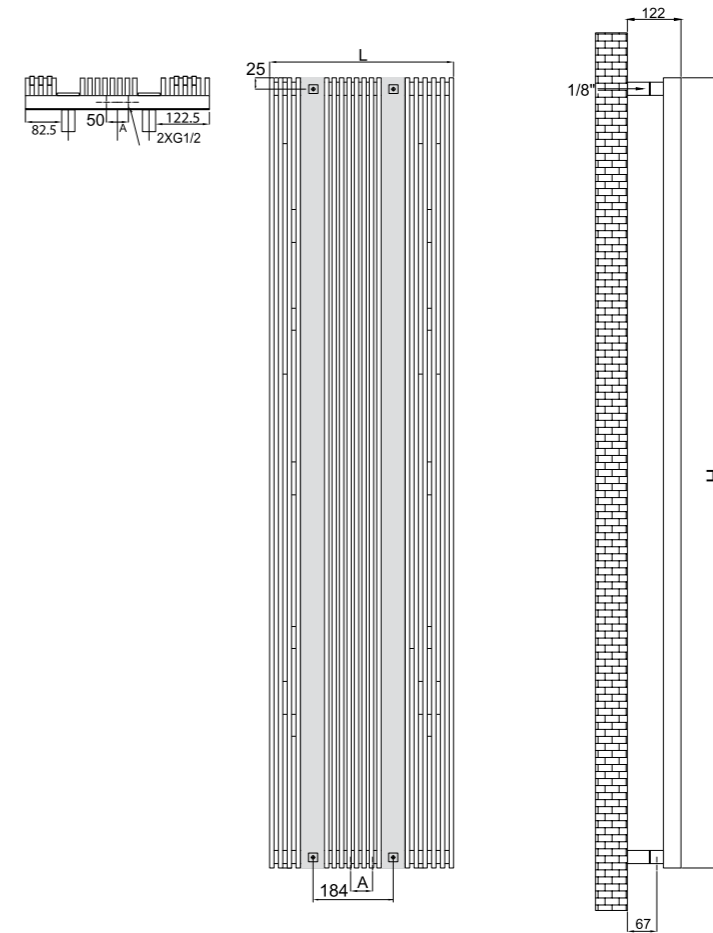

Hydraulic connections/
Conexiuni hidraulice



Recommended valves, not included: TWINS REGULATED, pag 230
Robineți recomandați, nu sunt incluși: TWINS REGULATED, pag 230

- Max. working pressure/
Presiune max. de lucru 7 bar
- Max. working temperature/
Temperatură max. de lucru 90°C
- Mounting kit included/
Kit montaj inclus; K06
- Factory pressure test/
Presiune de probă: 10 bar
- Elements & collectors/
Elemente și colectori: 40x10+30x30 mm